NOTES:

1. MAX. MOUNTING TORQUE = 4 lb-in.
2. HARDWARE IS INCLUDED.
3. THIS IS A LEAD FREE PRODUCT.
4. MAX. REFLOW IS 245°C FOR 5 SEC.

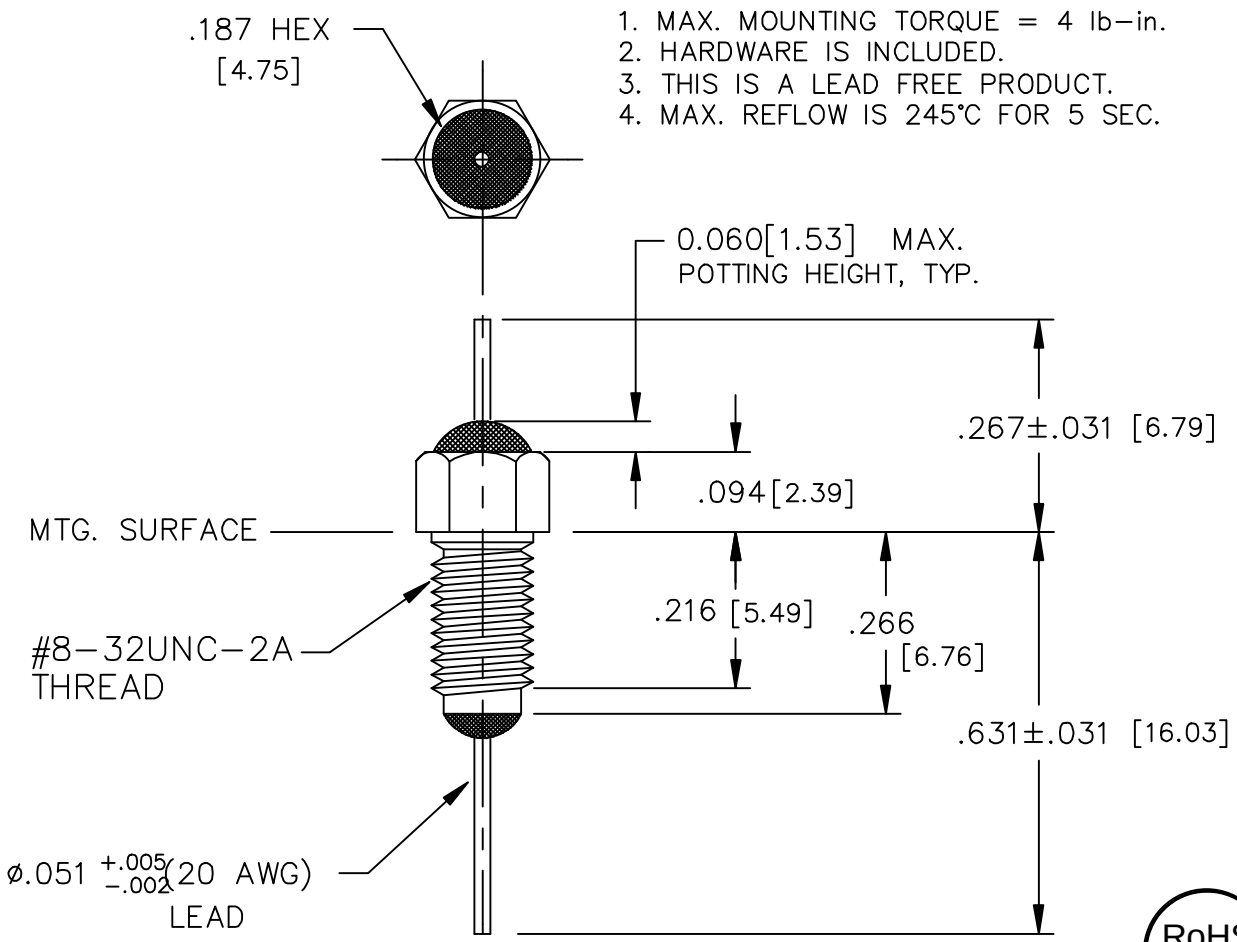

RoHS COMPLIANT

LEAD FINISH:	TIN/SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	1000pF $^{-0}_{+100\%}$
TEMP. RANGE	-55°C TO +125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 100 VDC -----
D.C. RESISTANCE	.01ohms MAX.

MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD

FREQ. MHz	I.L. (db)
30	11
100	20
300	28
1 GHz	28
10 GHz	28

SCHEMATIC

MARKING:
PART: SF 108

54F-713-108
DATE CODE
QTY./BAG
(200/BAG MAX.)

					00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
					CN 29233-CPD	CHANGE NOTICE	Fractions ± 1/64
							Dec. .xx±
							Dec. .xxx±.010
							Angles ±0° 30′
							CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN	Description FT RESIN SEAL FILTER
DATE 7-11-06	
Engr. STRUCHEN	54F-713-108
Scale NONE	