

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

## General Description

The AH9281/82 is a one-chip solution for driving two-coil brushless DC motors and fans.

Based on the advanced CDMOS process, the IC contains a Hall-effect sensor, dynamic offset correction and powerful output drivers with 1200mA peak output current capability.

Specially designed for driving large fans, the device is optimized for low start-up voltage. Frequency Generator or Rotation Detection is available. The open drain output makes easier the connectivity with any external interface such as hardware monitoring or Super I/O IC.

The AH9281/82 is available in TO-95 and SOT-89-5 packages.

## Features

- High Sensitivity Integrated Hall Sensor
- Low Start-up Voltage
- 5V and 12V Operation
- Peak Output Current up to 1200mA
- Power Efficient CMOS and Power MOSFETs
- Built-in Output Protection Clamping Diode
- Locked Rotor Shutdown and Auto-restart
- Integrated Tachometer (AH9281) or Alarm (AH9282) Signal Output
- ESD Rating: 6000V (Human Body Model)  
400V (Machine Model)

## Applications

- 5V/12V DC Brushless Motor/Fan
- PC, Server, Laptop Cooling Fan
- Power Supply Cooling Fan
- Large or Small Fans



Figure 1. Package Types of AH9281/82

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Pin Configuration**

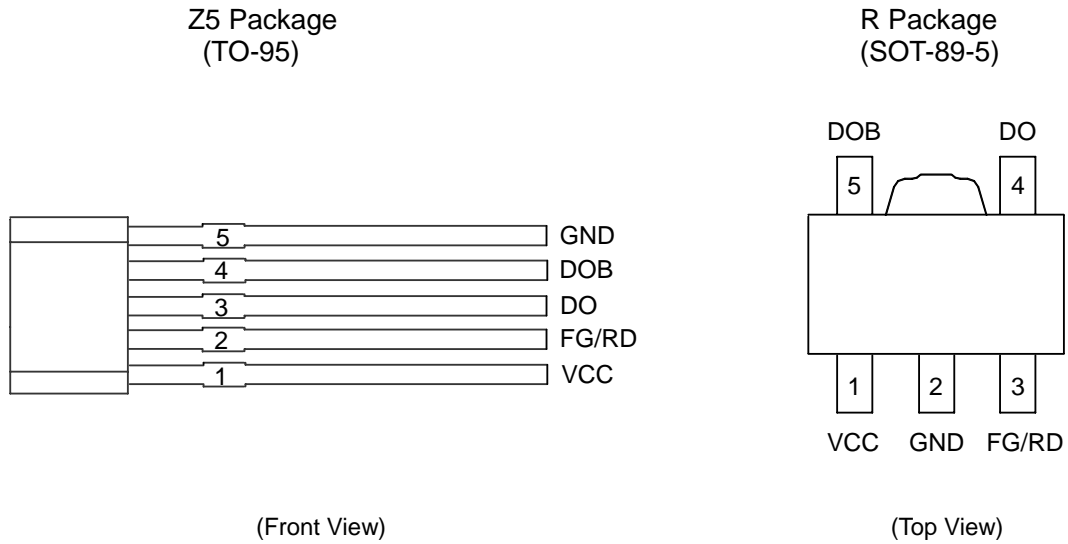



Figure 2. Pin Configuration of AH9281/82

**Pin Description**

Pin Number		Pin Name	Function
TO-95	SOT-89-5		
1	1	VCC	Power supply pin
2	3	FG/RD	Frequency Generator (Rotation Detection) open drain output
3	4	DO	Output pin 1
4	5	DOB	Output pin 2
5	2	GND	Ground pin

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Functional Block Diagram**

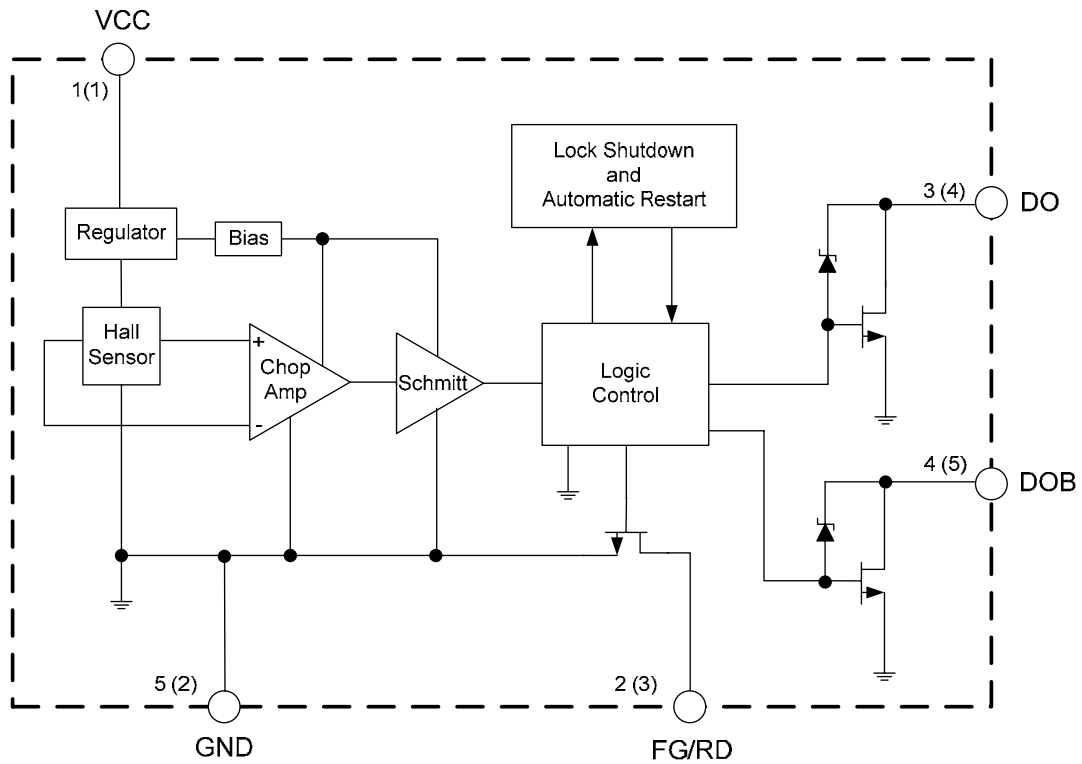


A (B)  
 A for TO-95  
 B for SOT-89-5

Figure 3. Functional Block Diagram of AH9281/82

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Ordering Information**

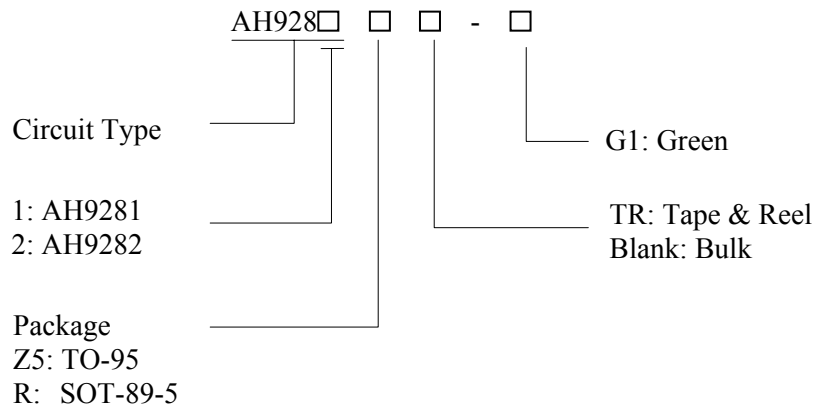

Package	Temperature Range	Output Signal	Part Number	Marking ID	Packing Type
TO-95	-40 to 125°C	FG	AH9281Z5-G1	9281Z5-G1	Bulk
		RD	AH9282Z5-G1	9282Z5-G1	Bulk
SOT-89-5		FG	AH9281RTR-G1	G41C	Tape & Reel
		RD	AH9282RTR-G1	G41D	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "G1" suffix in the part number, are RoHS compliant and green.

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82****Absolute Maximum Ratings (Note 1, T<sub>A</sub>=25°C)**

Parameter	Symbol	Value		Unit
Supply Voltage	V <sub>CC</sub>	18		V
Supply Current (Fault)	I <sub>CC</sub>	6		mA
Peak Output Current	I <sub>OUT_P</sub>	1200		mA
Continuous Output Current	I <sub>OUT_C</sub>	600		mA
FG/RD Pull-up Voltage	V <sub>FG/V<sub>RD</sub></sub>	28		V
Power Dissipation	P <sub>D</sub>	TO-95	600	mW
		SOT-89-5	800	
Thermal Resistance (Junction to Ambient)	θ <sub>JA</sub>	TO-95	208	°C/W
		SOT-89-5	156	
Storage Temperature	T <sub>STG</sub>	-55 to 150		°C
ESD (Human Body Model)	ESD	6000		V
ESD (Machine Model)	ESD	400		V

Note 1: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

**Recommended Operating Conditions**

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V <sub>CC</sub>	2.5	16	V
Operating Ambient Temperature	T <sub>A</sub>	-40	125	°C

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

## Electrical Characteristics


$V_{CC}=12V$ ,  $T_A=25^{\circ}C$ , unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	$V_{CC}$	Operating	2.5	12	16	V
Supply Current	$I_{CC}$	Average		4	6	mA
Output Current	$I_{OUT}$				500	mA
Output Leakage Current	$I_{LEAKAGE}$			0.1	10	$\mu A$
Saturation Voltage	$V_{SAT}$	$I_{OUT}=350mA$		600	1000	mV
Output ON Time	$t_{ON}$			0.8		S
Output OFF Time	$t_{OFF}$			5		S
FG/RD Output Low Voltage	$V_{FGL}/V_{RDL}$	$I_{FG}=5mA$		0.1	0.2	V
FG/RD Output Leakage Current	$I_{FGLK}/I_{RDLK}$	$V_{FG}/V_{RD}=12V$		0.1	10	$\mu A$
FG/RD Output Current Limit	$I_{FGLIM}/I_{RDLIM}$	$V_{FG}/V_{RD}=12V$		30		mA
Output Zener Break-down Voltage	$V_Z$			35		V

## Magnetic Characteristics

$V_{CC}=12V$ ,  $T_A=25^{\circ}C$ , unless otherwise specified.

Parameter	Symbol	Min	Typ	Max	Unit
Operating Point	$B_{OP}$	0	20	50	Gauss
Releasing Point	$B_{RP}$	-50	-20	0	Gauss
Hysteresis	$B_{HYS}$		40		Gauss

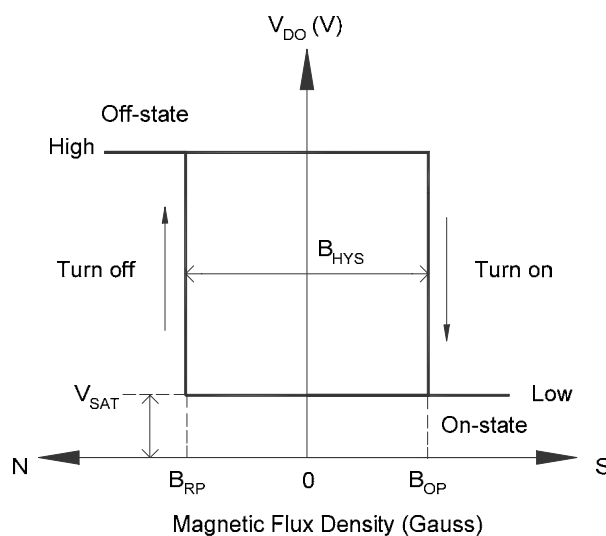

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Test Circuit**

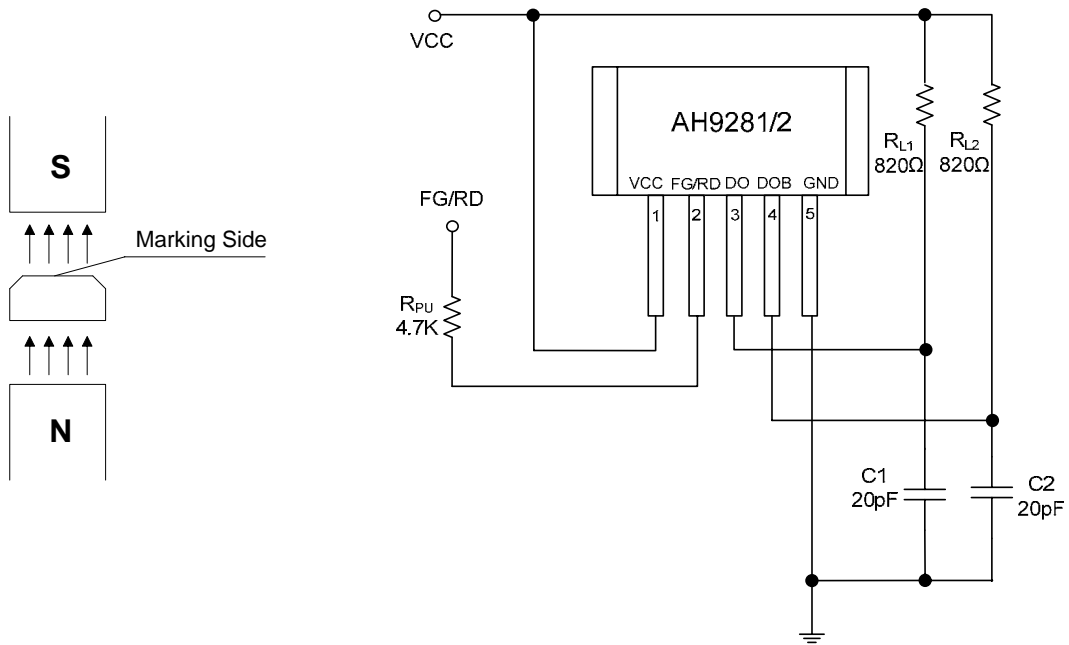


Figure 4. Basic Test Circuit of AH9281/82

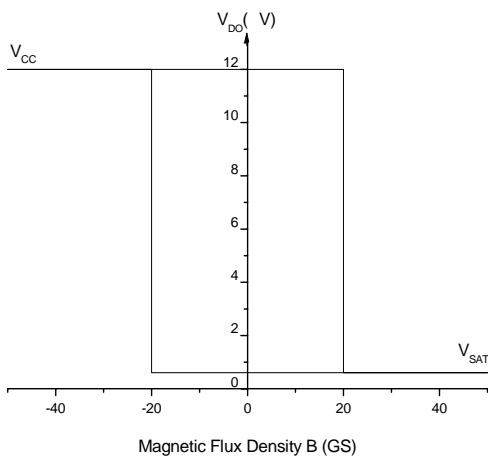


Figure 5.  $V_{DO}$  vs. Magnetic Flux Density

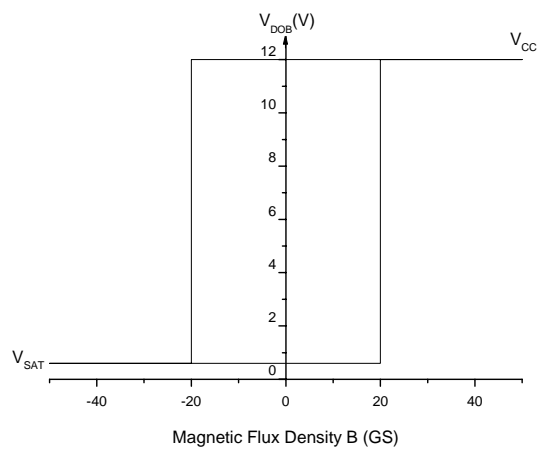


Figure 6.  $V_{DOB}$  vs. Magnetic Flux Density

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Typical Performance Characteristics**

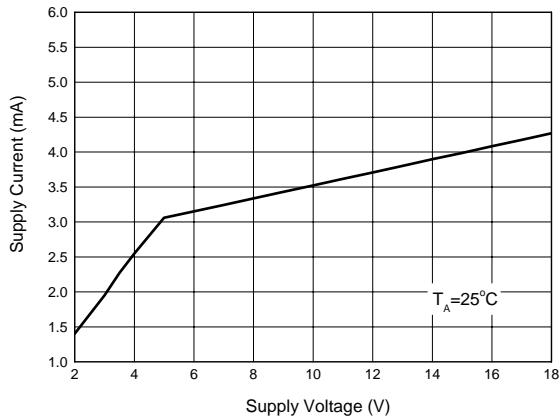


Figure 7. Supply Current vs. Supply Voltage

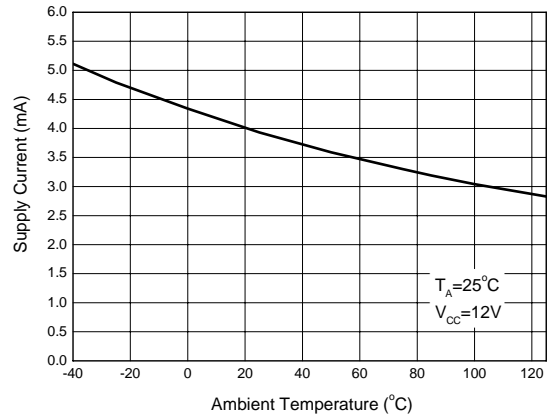


Figure 8. Supply Current vs. Ambient Temperature

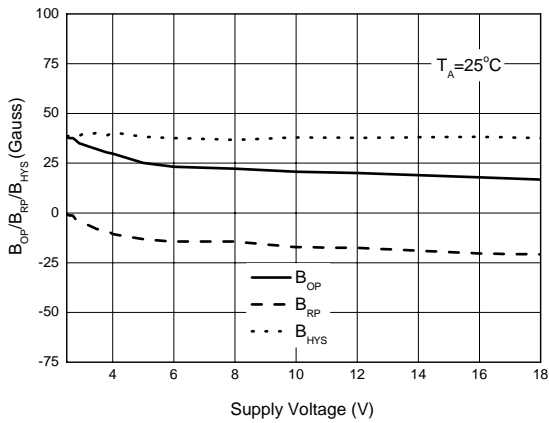


Figure 9. B<sub>OP</sub>/B<sub>RP</sub>/B<sub>HYS</sub> vs. Supply Voltage

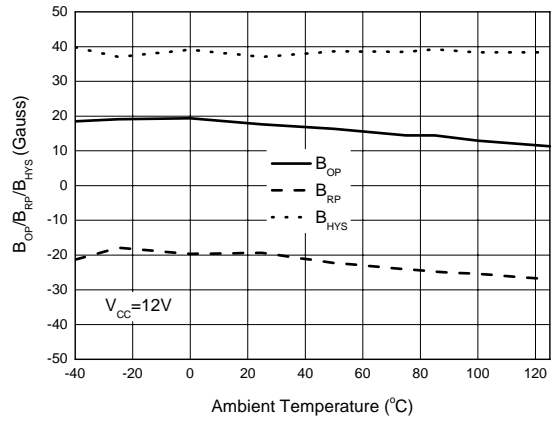


Figure 10. B<sub>OP</sub>/B<sub>RP</sub>/B<sub>HYS</sub> vs. Ambient Temperature



**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Typical Performance Characteristics (Continued)**

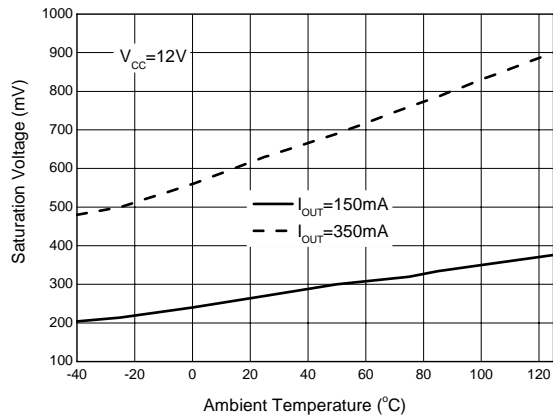


Figure 11. Saturation Voltage vs. Ambient Temperature

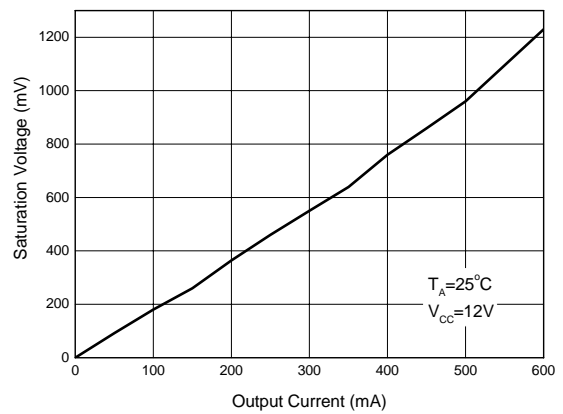


Figure 12. Saturation Voltage vs. Output Current

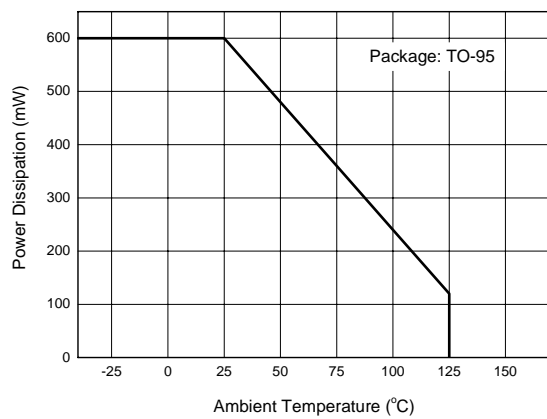


Figure 13. Power Dissipation vs. Ambient Temperature

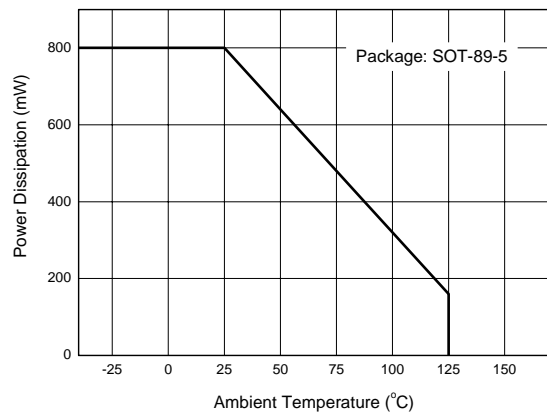


Figure 14. Power Dissipation vs. Ambient Temperature

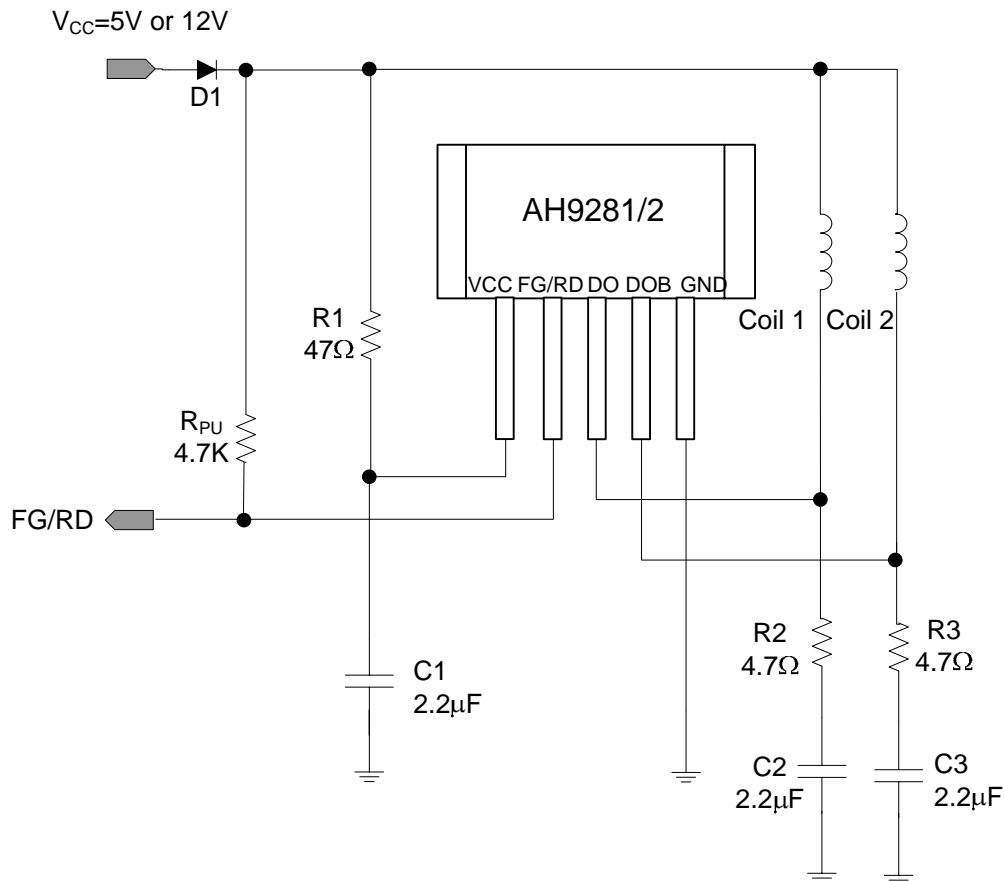
**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**
**Typical Application**


Figure 15. Typical Application 1 of AH9281/82 (TO-95, Note 2)

**Note 2:**

1. D1 is an ordinary diode used to filter the noise from VCC and protect IC if VCC and GND are plugged reversed.
2.  $R1=47\Omega$  typical.
3.  $C1=C2=C3=2.2\mu F$  typical, electrolytic capacitors are better. They should be fine tuned based on system design.
4.  $R2=R3=4.7\Omega$  typical. They can be cancelled according to system requirement.
5.  $R_{PU}=4.7k\Omega$  typical.

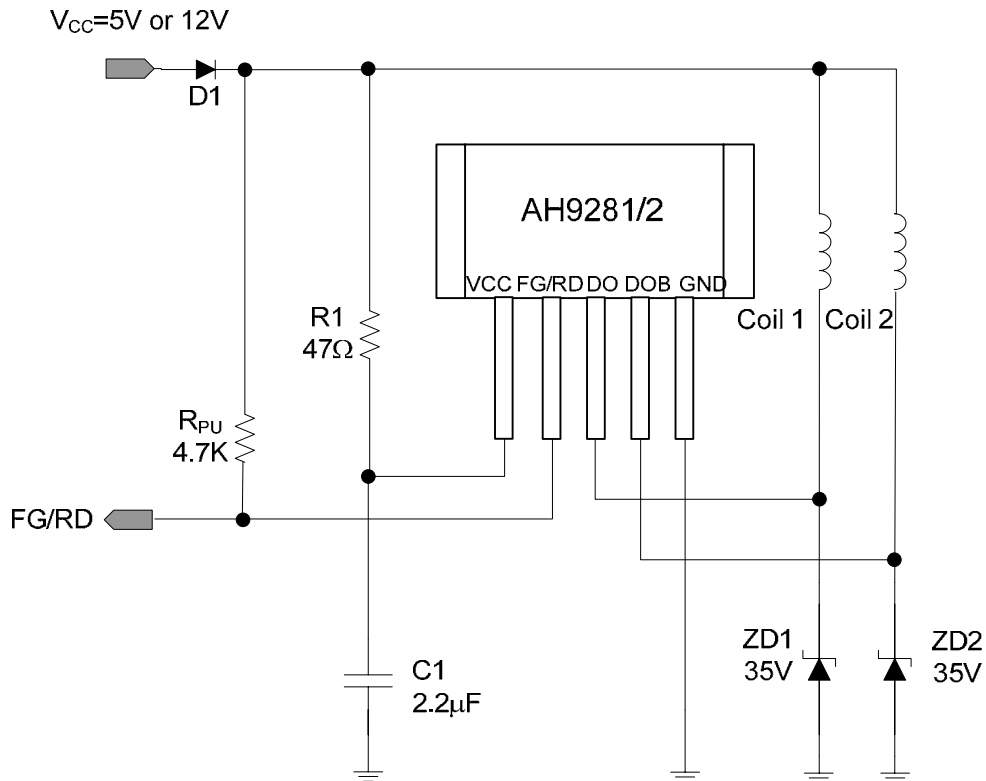
**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**
**Typical Application (Continued)**


Figure 16. Typical Application 2 of AH9281/82 (TO-95, Note 3)

**Note 3:**

1. D1 is an ordinary diode used to filter the noise from VCC and protect IC if VCC and GND are plugged reversed.
2.  $R1=47\Omega$  typical.
3.  $C1=2.2\mu\text{F}$  typical, electrolytic capacitors are better. They should be fine tuned based on system design.
4. ZD1 and ZD2 breakdown voltage are 35V.
5.  $R_{PU}=4.7\text{k}\Omega$  typical.

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Typical Application (Continued)**

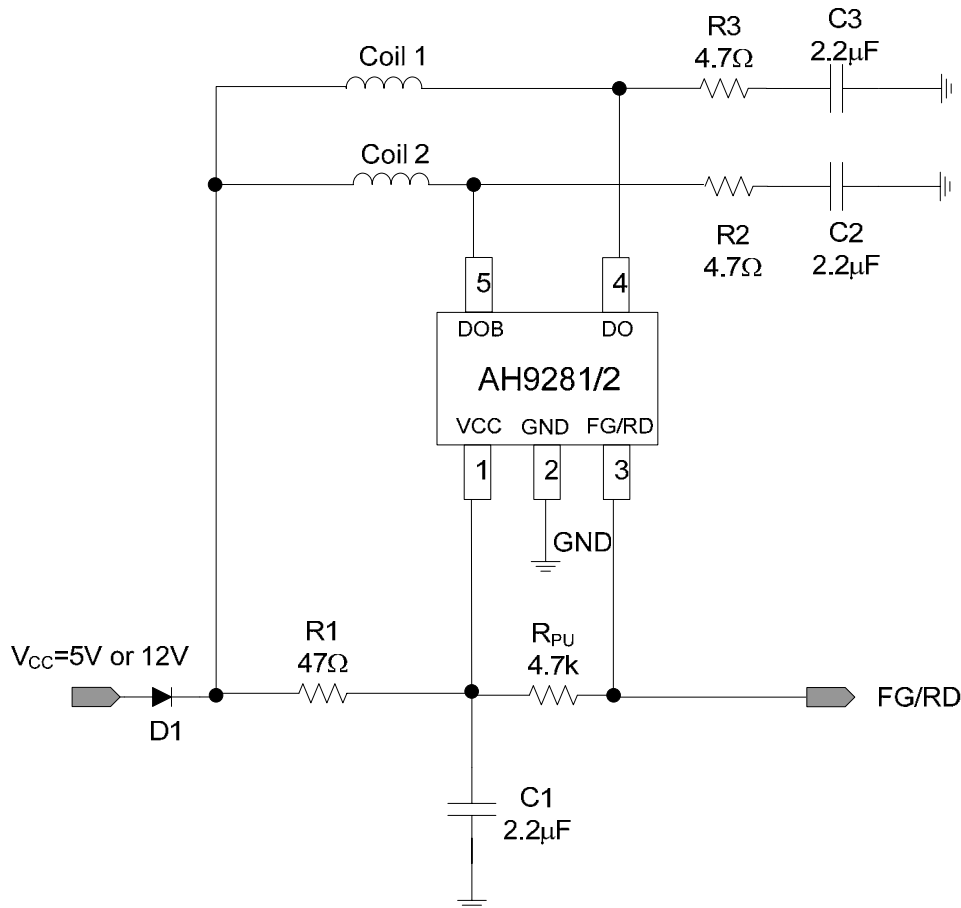


Figure 17. Typical Application 3 of AH9281/82 (SOT-89-5, Note 4)

Note 4:

1. D1 is an ordinary diode used to filter the noise from VCC and protect IC if VCC and GND are plugged reversed.
2. R1=47Ω typical.
3. C1=C2=C3=2.2μF typical, electrolytic capacitors are better. They should be fine tuned based on system design.
4. R2=R3=4.7Ω typical. They can be cancelled according to system requirement.
5. R<sub>PU</sub>=4.7kΩ typical.

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Typical Application (Continued)**

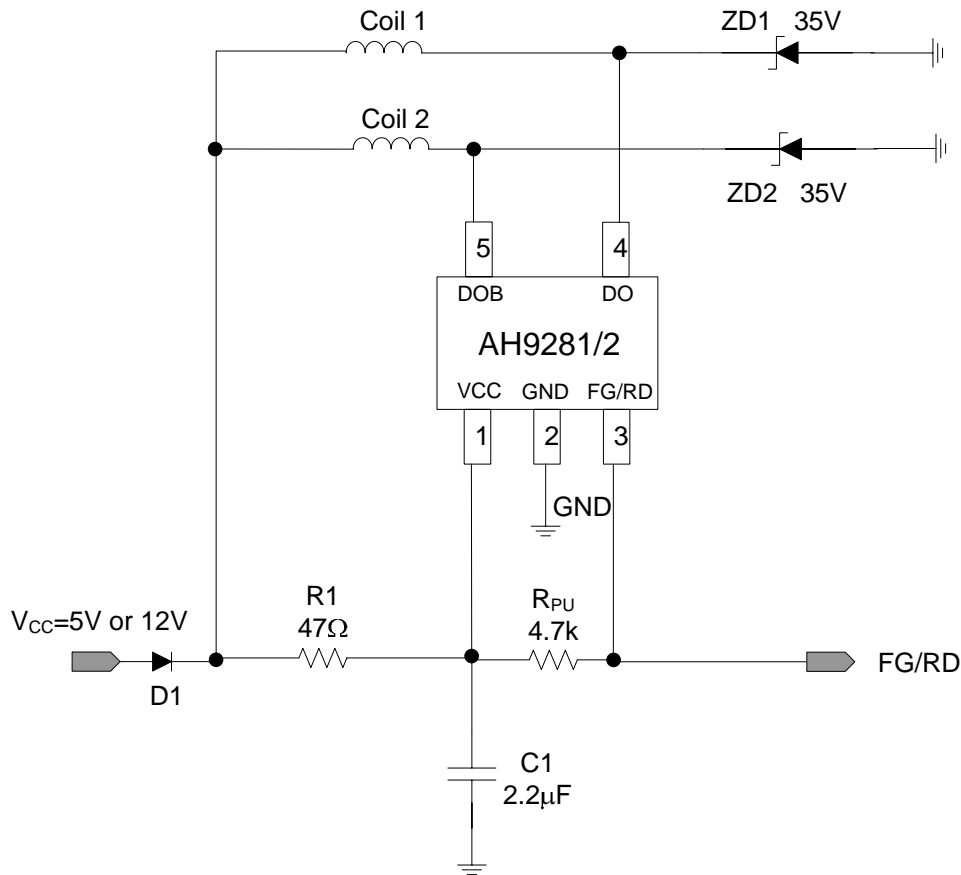


Figure 18. Typical Application 4 of AH9281/82 (SOT-89-5, Note 5)

Note 5:


1. D1 is an ordinary diode used to filter the noise from VCC and protect IC if VCC and GND are plugged reversed.
2. R1=47Ω typical.
3. C1=2.2μF typical, electrolytic capacitors are better. They should be fine tuned based on system design.
4. ZD1 and ZD2 breakdown voltage are 35V.
5. R<sub>PU</sub>=4.7kΩ typical.

**Two Phase Dual-coil High Voltage Smart Fan Motor Driver with FG/RD AH9281/82**

**Mechanical Dimensions**

**TO-95**

**Unit: mm(inch)**

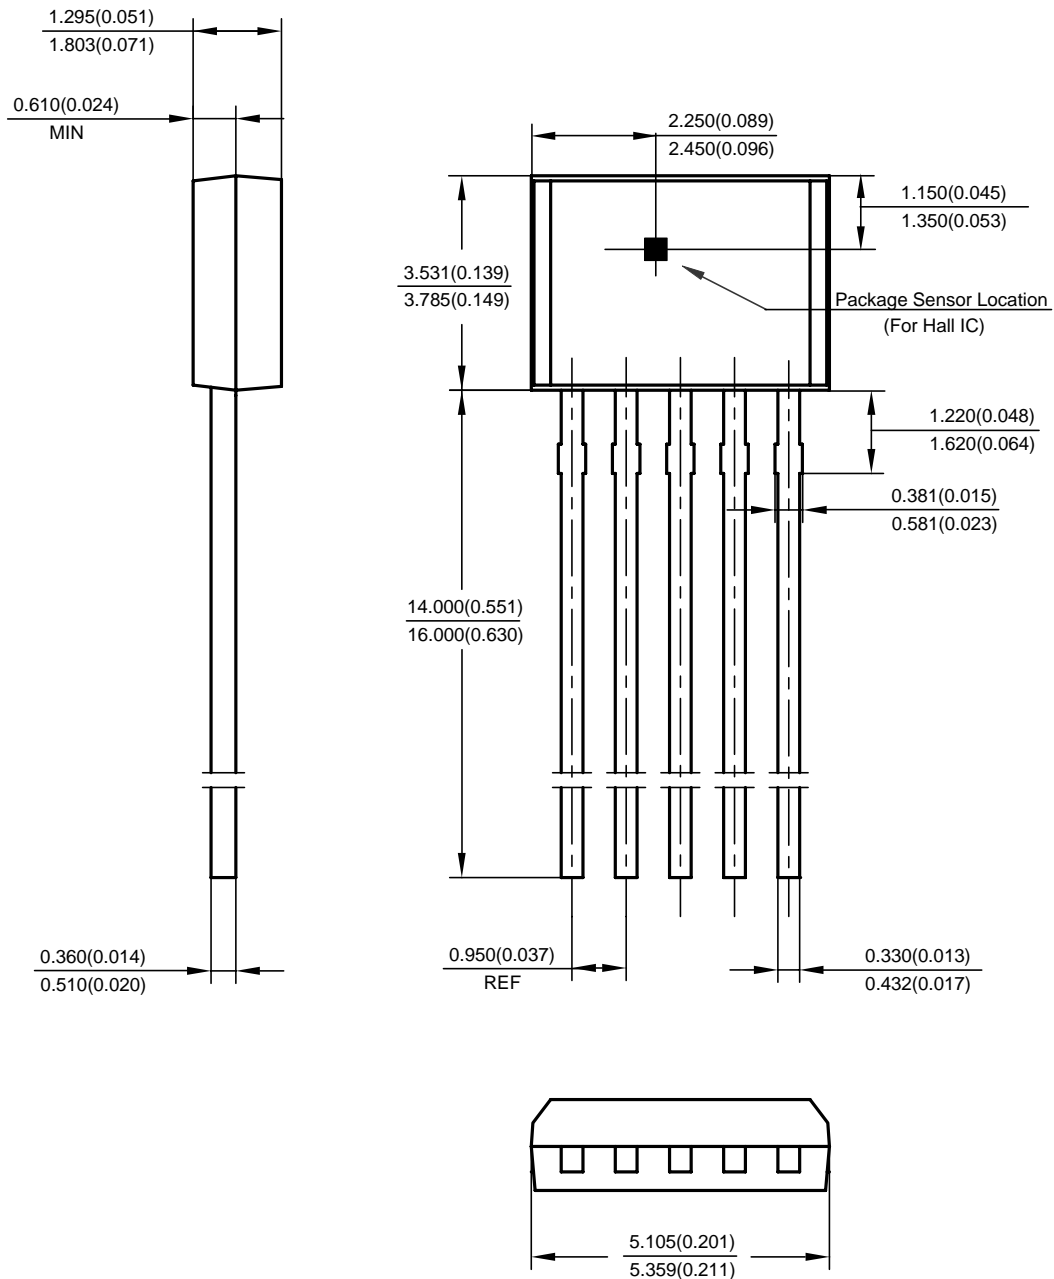





## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. 1.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

##### **BCD Semiconductor (Taiwan) Company Limited**

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

##### **BCD Semiconductor Corp.**

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788