

# **SAW Components**

Data Sheet B4066

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



SAW Components B4066
Low Loss Filter 1542,0 MHz


**Data Sheet** 



#### Ceramic Package DCC6D

#### **Features**

- Low loss RF filter
- Usable passband 34 MHz
- Low insertion attenuation, low amplitude ripple
- Unbalanced to balanced operation
- Package for Surface Mounted Technology (SMT)
- RoHS compliant

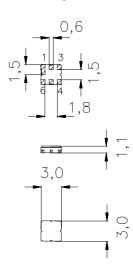


#### **Terminals**

Ni, gold-plated

Dimensions in mm, approx. weight 37 mg

## Pin configuration

2	Input, unbalanced
4, 6	Output, balanced
1, 3, 5	To be grounded
1, 3, 5	Case ground



Туре	Ordering code	Marking and Package	Packing
		according to	according to
B4066	B39152-B4066-U510	C61157-A7-A68	F61074-V8168-Z000

Electrostatic Sensitive Device (ESD)

# **Maximum ratings**

Operable temperature range	T	-40 / +85	°C	
Storage temperature range	$T_{ m stg}$	-40 / +85	°C	
DC voltage	$V_{\rm DC}^{\rm ng}$	0	V	
ESD voltage	V* <sub>ESD</sub>	50*	V	Machine Model, 10 pulses
Input Power at GSM850, GSM900 GSM1800, GSM1900 Tx bands	P <sub>IN</sub>	15	dBm	effective power in the on-state, duty cycle 4:8

<sup>\*-</sup>acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components B4066

1542,0 MHz **Low Loss Filter** 

**Data Sheet** 



#### **Characteristics**

 $T = -40 \text{ to } +85 \,^{\circ}\text{C}$ Operating temperature range:

Terminating source impedance:


 $Z_{\rm S} = 50 \ \Omega$  $Z_{\rm L} = 50 \ \Omega$  (balanced) Terminating load impedance:

				min.	typ.	max.	
Center frequency			f <sub>C</sub>	_	1542,0	_	MHz
Maximum insertion attenuation		$\alpha_{\text{max}}$					
1525,0	1559,0	MHz			3,3	4,5	dB
Amplitude ripple (p-p)			Δα				
1525,0	1559,0	MHz			0,7	1,5	dB
Absolute attenuation			$\alpha_{abs}$				
0,0	1000,0	MHz		40,0	58,0	_	dB
1000,0	1480,0	MHz		35,0	50,0	_	dB
1480,0	1490,0	MHz		20,0	48,0	_	dB
	1575,0	MHz		2,0	8,0	_	dB
1600,0	1650,0	MHz		20,0	30,0	_	dB
1650,0	1785,0	MHz		35,0	54,0	_	dB
1785,0	2200,0	MHz		30,0	50,0		dB
2200,0	2500,0	MHz		27,0	52,0		dB
2500,0	4000,0	MHz		18,0	40,0		dB




SAW Components		B4066
Low Loss Filter		1542,0 MHz
Data Sheet	SMD	

## **Transfer function**

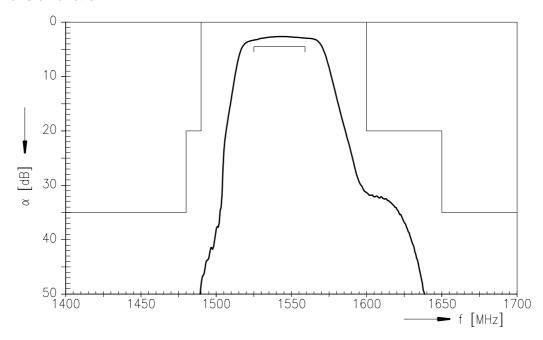

## Transfer function (wide band)

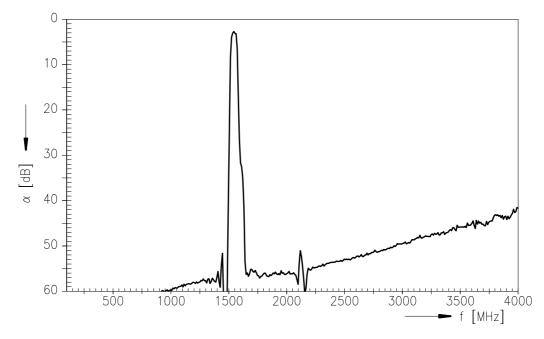



**SAW Components** B4066 **Low Loss Filter** 1542,0 MHz 

**Data Sheet** 

## **Published by EPCOS AG** Surface Acoustic Wave Components Division, SAW COM WT PD P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.