

Overview

FG Series Supercapacitors, also known as Electric Double-Layer Capacitors (EDLCs), are intended for high energy storage applications.

Applications

Supercapacitors have characteristics ranging from traditional capacitors and batteries. As a result, supercapacitors can be used like a secondary battery when applied in a DC circuit. These devices are best suited for use in low voltage DC hold-up applications such as embedded microprocessor systems with flash memory.


Benefits

- Wide range of temperature from -25°C to +70°C (FG and FGH types) and -40°C to +85°C (FGR type)
- Maintenance free
- 3.5 VDC and 5.5 VDC
- Highly reliable against liquid leakage
- Lead-free and RoHS Compliant

Part Number System

| | | | | |
|----|--|--|--|--|
| FG | | | | |
| | | | | |
| | | | | |

Dimensions – Millimeters

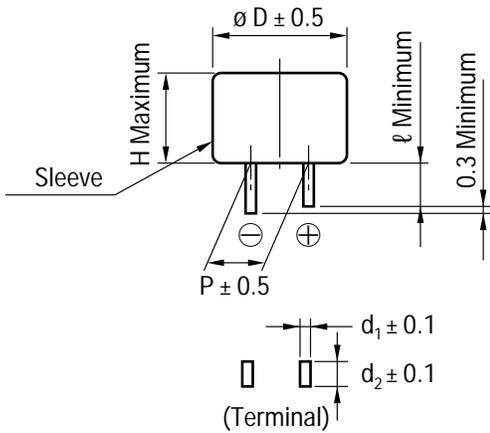

| Part Number | $\varnothing D$ | H | P | ℓ | d_1 | d_2 |
|-------------|-----------------|------|-------|--------|-------|-------|
| FG0H103ZF | 11.0 | 5.5 | 5.08 | 2.7 | 0.2 | 1.2 |
| FG0H223ZF | 11.0 | 5.5 | 5.08 | 2.7 | 0.2 | 1.2 |
| FG0H473ZF | 11.0 | 5.5 | 5.08 | 2.7 | 0.2 | 1.2 |
| FG0H104ZF | 11.0 | 6.5 | 5.08 | 2.7 | 0.2 | 1.2 |
| FG0H224ZF | 13.0 | 9.0 | 5.08 | 2.2 | 0.4 | 1.2 |
| FG0H474ZF | 14.5 | 18.0 | 5.08 | 2.4 | 0.4 | 1.2 |
| FG0H105ZF | 16.5 | 19.0 | 5.08 | 2.7 | 0.4 | 1.2 |
| FG0H225ZF | 21.5 | 19.0 | 7.62 | 3.0 | 0.6 | 1.2 |
| FG0H475ZF | 28.5 | 22.0 | 10.16 | 6.1 | 0.6 | 1.4 |
| FG0V155ZF | 16.5 | 14.0 | 5.08 | 3.1 | 0.4 | 1.2 |
| FGH0H104ZF | 11.0 | 5.5 | 5.08 | 2.7 | 0.2 | 1.2 |
| FGH0H224ZF | 11.0 | 7.0 | 5.08 | 2.7 | 0.2 | 1.2 |
| FGH0H474ZF | 16.5 | 8.0 | 5.08 | 2.7 | 0.4 | 1.2 |
| FGH0H105ZF | 21.5 | 9.5 | 7.62 | 3.0 | 0.6 | 1.2 |
| FGH0V474ZF | 13.0 | 7.5 | 5.08 | 2.7 | 0.4 | 1.2 |
| FGR0H474ZF | 14.5 | 18.0 | 5.08 | 2.4 | 0.4 | 1.2 |
| FGR0H105ZF | 16.5 | 19.0 | 5.08 | 2.7 | 0.4 | 1.2 |
| FGR0H225ZF | 21.5 | 19.0 | 7.62 | 3.0 | 0.6 | 1.2 |

Performance Characteristics

Supercapacitors should not be used for applications such as ripple absorption because of their high internal resistance (several hundred mΩ to a hundred Ω) compared to aluminum electrolytic capacitors. Thus, its main use would be similar to that of secondary battery such as power back-up in DC circuit. The following list shows the characteristics of supercapacitors as compared to aluminum electrolytic capacitors for power back-up and secondary batteries.

| | Secondary Battery | | Capacitor | |
|----------------------------------|-------------------------|------------------------------------------|-----------------------|-------------------------------|
| | NiCd | Lithium Ion | Aluminum Electrolytic | Supercapacitor |
| Back-up ability | – | – | – | – |
| Eco-hazard | Cd | – | – | – |
| Operating Temperature Range | –20 to +60°C | –20 to +50°C | –55 to +105°C | –40 to +85°C (FR, FT) |
| Charge Time | few hours | few hours | few seconds | few seconds |
| Charge/Discharge Life Time | approximately 500 times | approximately 500 to 1,000 times | limitless (*1) | limitless (*1) |
| Restrictions on Charge/Discharge | yes | yes | none | none |
| Flow Soldering | not applicable | not applicable | applicable | applicable |
| Automatic Mounting | not applicable | not applicable | applicable | applicable (FM and FC series) |
| Safety Risks | leakage, explosion | leakage, combustion, explosion, ignition | heat-up, explosion | gas emission (*2) |

(*1) Aluminum electrolytic capacitors and supercapacitors have limited lifetime. However, when used under proper conditions, both can operate within a predetermined lifetime.

(*2) There is no harm as it is a mere leak of water vapor which transitioned from water contained in the electrolyte (diluted sulfuric acid). However,


Table 1 – Ratings & Part Number Reference

| Part Number | Maximum Operating Voltage (VDC) | Nominal Capacitance | | Maximum ESR at 1 kHz (Ω) | Maximum Current at 30 Minutes (mA) | Voltage Holding Characteristic Minimum (V) | Weight (g) |
|-------------------|---------------------------------|---------------------|----------------------|-----------------------------------|------------------------------------|--------------------------------------------|------------|
| | | Charge System (F) | Discharge System (F) | | | | |
| FGOV155ZF | 3.5 | 1.5 | 2.2 | 65 | 1.5 | — | 5.2 |
| FG0H103ZF | 5.5 | 0.010 | 0.013 | 300 | 0.015 | 4.2 | 0.9 |
| FG0H223ZF | 5.5 | 0.022 | 0.028 | 200 | 0.033 | 4.2 | 1.0 |
| FG0H473ZF | 5.5 | 0.047 | 0.060 | 200 | 0.071 | 4.2 | 1.0 |
| FG0H104ZF | 5.5 | 0.10 | 0.13 | 100 | 0.15 | 4.2 | 1.3 |
| FGH0H104ZF | 5.5 | — | 0.10 | 100 | 0.15 | 4.2 | 1.0 |
| FG0H224ZF | 5.5 | 0.22 | 0.28 | 100 | 0.33 | 4.2 | 2.5 |
| FGH0H224ZF | 5.5 | — | 0.22 | 100 | 0.33 | 4.2 | 1.3 |
| FGH0H105ZF | 5.5 | 0.47 | 1.0 | | | | |
| | | | | | | | |
| | | | | | | | |

Specifications

| Item | | FG, FGH Type | | FGR Type | | Test Conditions (conforming to JIS C 5160-1) |
|------------------------------------------|----------------------------|--------------------------------------------------------------|------------------------------|--------------------------------------------------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category Temperature Range | | -25°C to +70°C | | -40°C to +85°C | | |
| Maximum Operating Voltage | | 5.5 VDC, 3.5 VDC | | 5.5 VDC | | |
| Capacitance | | Refer to Table 1 | | Refer to Table 1 | | Refer to "Measurement Conditions" |
| Capacitance Allowance | | +80%, -20% | | +80%, -20% | | Refer to "Measurement Conditions" |
| ESR | | Refer to Table 1 | | Refer to Table 1 | | Measured at 1 kHz, 10 mA; See also "Measurement Conditions" |
| Current (30 minutes value) | | Refer to Table 1 | | Refer to Table 1 | | Refer to "Measurement Conditions" |
| Surge | Capacitance | > 90% of initial ratings | | > 90% of initial ratings | | Surge voltage: 6.3 V (5.5 V type) 4.0 V (3.5 V type) Charge: 30 seconds Discharge: 9 minutes 30 seconds Number of cycles: 1,000 Series resistance: 0.010 F 1500 Ω 0.022 F 560 Ω 0.047 F 300 Ω 0.10 F 150 Ω 0.22 F 56 Ω 0.47 F 30 Ω 1.0 F, 1.5 F 15 Ω 2.2 F, 4.7 F 10 Ω Discharge resistance: 0 Ω Temperature: 70±2°C (FG, FGH) 85±2°C (FGR) |
| | ESR | ≤ 120% of initial ratings | | ≤ 120% of initial ratings | | |
| | Current (30 minutes value) | ≤ 120% of initial ratings | | ≤ 120% of initial ratings | | |
| | Appearance | No obvious abnormality | | No obvious abnormality | | |
| Characteristics in Different Temperature | Capacitance | Phase 2 | ≥ 50% of initial value | Phase 2 | ≥ 50% of initial value | Conforms to 4.17 Phase 1: +25±2°C Phase 2: -25±2°C Phase 3: -40±2°C (FGR) Phase 4: +25±2°C Phase 5: +70±2°C (FG, FGH) +85±2°C (FGR) Phase 6: +25±2°C |
| | ESR | | ≤ 400% of initial value | | ≤ 400% of initial value | |
| | Capacitance | Phase 3 | / | Phase 3 | ≥ 30% of initial value | |
| | ESR | | | | ≤ 700% of initial value | |
| | Capacitance | Phase 5 | ≤ 200% of initial value | Phase 5 | ≤ 200% of initial value | |
| | ESR | | Satisfy initial ratings | | Satisfy initial ratings | |
| | Current (30 minutes value) | | ≤ 1.5 CV (mA) | | ≤ 1.5 CV (mA) | |
| | Capacitance | Phase 6 | Within ±20% of initial value | Phase 6 | Within ±20% of initial value | |
| | ESR | | Satisfy initial ratings | | Satisfy initial ratings | |
| Current (30 minutes value) | Satisfy initial ratings | | Satisfy initial ratings | | | |
| Vibration Resistance | Capacitance | Satisfy initial ratings | | Satisfy initial ratings | | Conforms to 4.13 Frequency: 10 to 55 Hz Testing Time: 6 hours |
| | ESR | | | | | |
| | Current (30 minutes value) | | | | | |
| | Appearance | No obvious abnormality | | No obvious abnormality | | |
| Solderability | | Over 3/4 of the terminal should be covered by the new solder | | Over 3/4 of the terminal should be covered by the new solder | | Conforms to 4.11 Solder temp: +245±5°C Dipping time: 5±0.5 seconds 1.6 mm from the bottom should be dipped. |

Marking

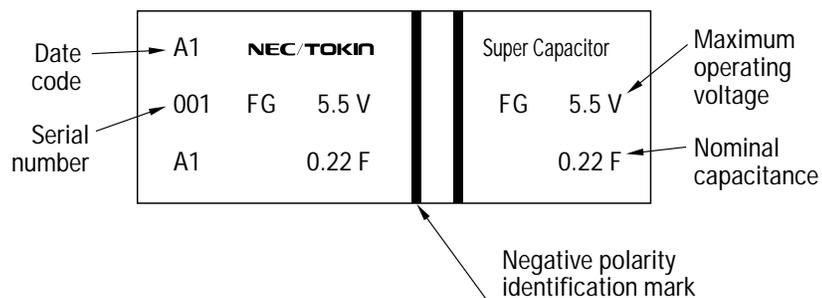

Packaging Quantities

| Part Number | Bulk Quantity per Box |
|-------------|-----------------------|
| FG0H103ZF | 2,000 pieces |
| FG0H223ZF | 2,000 pieces |
| FG0H473ZF | 2,000 pieces |
| FG0H104ZF | 1,600 pieces |
| FG0H224ZF | 800 pieces |
| FG0H474ZF | 300 pieces |
| FG0H105ZF | 240 pieces |
| FG0H225ZF | 90 pieces |
| FG0H475ZF | 50 pieces |
| FG0V155ZF | 160 pieces |
| FGH0H104ZF | 2,000 pieces |
| FGH0H224ZF | 1,600 pieces |
| FGH0H474ZF | 600 pieces |
| FGH0H105ZF | 90 pieces |
| FGH0V474ZF | 800 pieces |
| FGR0H474ZF | 300 pieces |
| FGR0H105ZF | 240 pieces |
| FGR0H225ZF | 90 pieces |

List of Plating & Sleeve Type

By changing the solder plating from leaded solder to lead-free solder and the outer tube material of can-cased conventional supercapacitor from polyvinyl chloride to polyethylene terephthalate (PET), our supercapacitor is now even friendlier to the environment.

- a. Iron + copper base + lead-free solder plating (Sn-1Cu)
- b. SUS nickel base + copper base + re flow lead-free solder plating (100% Sn, re flow processed)

| Series | Part Number | Plating | Sleeve |
|--------|---------------|---------|------------|
| FG | FG0H103ZF | b | PET (Blue) |
| | FG0H223ZF | b | PET (Blue) |
| | FG0H473ZF | b | PET (Blue) |
| | FG0H104ZF | b | PET (Blue) |
| | FG0H224ZF | a | PET (Blue) |
| | FG0H474ZF | a | PET (Blue) |
| | FG0H105ZF | a | PET (Blue) |
| | FG0H225ZF | a | PET (Blue) |
| | FG0H475ZF | a | PET (Blue) |
| | FG0V155ZF | a | PET (Blue) |
| | FGH0H104ZF | b | PET (Blue) |
| | FGH0H224ZF | b | PET (Blue) |
| | FGH0H474ZF | a | PET (Blue) |
| | FGH0H105ZF | a | PET (Blue) |
| | FGH0V474ZF | a | PET (Blue) |
| | All FGR Types | a | PET (Blue) |

Recommended Pb-free solder :

Sn/3.5Ag/0.75Cu

Sn/3.0Ag/0.5Cu

Sn/0.7Cu


Sn/2.5Ag/1.0Bi/0.5Cu

Measurement Conditions

Capacitance (Charge System)

Capacitance is calculated from expression (9) by measuring the charge time constant (τ) of the capacitor (C). Prior to measurement, the capacitor is discharged by shorting both pins of the device for at least 30 minutes. In addition, use the polarity indicator on the device to determine correct orientation of capacitor for charging.

$$\text{Capacitance: } C = \frac{\tau}{R_c} \text{ (F) (9)}$$

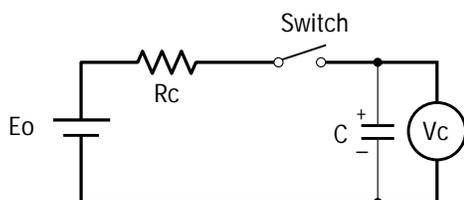

Eo: 3.0 (V) Product with maximum operating voltage of 3.5 V
 5.0 (V) Product with maximum operating voltage of 5.5 V
 6.0 (V) Product with maximum operating voltage of 6.5 V
 10.0 (V) Product with maximum operating voltage of 11 V
 12.0 (V) Product with maximum operating voltage of 12 V

τ : Time from start of charging until Vc becomes 0.632 Eo (V)
 (seconds)

Rc: See table below (Ω).

Charge Resistor Selection Guide

| Cap | FA | FE | FS | FY | | | FR | FM, FME FMR, FML | FMC | FG FGR | FGH | FT | FC, FCS | HV |
|---------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-------------------------------------|----------------|----------------|-----------|--------------|-----------|-----------|
| | | | | FYD | FYH | FYL | | | | | | | | |
| 0.010 F | – | – | – | – | – | 5,000 Ω | – | 5,000 Ω | – | 5,000 Ω | – | – | – | – |
| 0.022 F | 1,000 Ω | – | 1,000 Ω | 2,000 Ω | – | 2,000 Ω | – | – | Discharge | – |
| 0.033 F | – | – | – | – | – | – | – | Discharge | – | – | – | – | – | – |
| 0.047 F | 1,000 Ω | 1,000 Ω | 1,000 Ω | 2,000 Ω | 1,000 Ω | 2,000 Ω | 1,000 Ω | 2,000 Ω | 1,000 Ω | 2,000 Ω | – | – | – | – |
| 0.10 F | 510 Ω | 510 Ω | 510 Ω | 1,000 Ω | 510 Ω | – | 1,000 Ω | 1,000 Ω | 1,000 Ω | 1,000 Ω | Discharge | 510 Ω | Discharge | – |
| 0.22 F | 200 Ω | 200 Ω | 200 Ω | 510 Ω | 510 Ω | – | 510 Ω | 0H: Discharge 0V: 1,000 Ω | – | 1,000 Ω | Discharge | 200 Ω | Discharge | – |
| 0.33 F | – | – | – | – | – | – | – | – | Discharge | – | – | – | – | – |
| 0.47 F | 100 Ω | 100 Ω | 100 Ω | 200 Ω | 200 Ω | – | 200 Ω | – | – | 1,000 Ω | Discharge | 100 Ω | Discharge | – |
| 1.0 F | 51 Ω | 51 Ω | 100 Ω | 100 Ω | 100 Ω | – | 100 Ω | – | – | 510 Ω | Discharge | 100 Ω | Discharge | Discharge |
| 1.4 F | – | – | – | 200 Ω | – | – | – | – | – | – | – | – | – | – |
| 1.5 F | – | 51 Ω | – | – | – | – | – | – | – | 510 Ω | – | – | – | – |
| 2.2 F | – | – | – | 100 Ω | – | – | – | – | – | 200 Ω | – | 51 Ω | – | – |
| 2.7 F | – | – | – | – | – | – | – | – | – | – | – | – | – | Discharge |
| 3.3 F | – | – | – | – | – | – | – | – | – | – | – | 51 Ω | – | – |
| 4.7 F | – | – | – | – | – | – | – | – | – | 100 Ω | – | – | – | Discharge |
| 5.0 F | – | – | 100 Ω | – | – | – | – | – | – | – | – | – | – | – |
| 5.6 F | – | – | – | – | – | – | – | – | – | – | – | 20 Ω | – | – |
| 10.0 F | – | – | – | – | – | – | – | – | – | – | – | – | – | Discharge |
| 22.0 F | – | – | – | – | – | – | – | – | – | – | – | – | – | Discharge |
| 50.0 F | – | – | – | – | – | – | – | – | – | – | – | – | – | Discharge |
| 100.0 F | – | – | – | – | – | – | – | – | – | – | – | – | – | Discharge |
| 200.0 F | – | – | – | – | – | – | – | – | – | – | – | – | – | Discharge |

*Capacitance values according to the constant current discharge method.

*HV Series capacitance is measured by discharge system

Measurement Conditions cont'd

Capacitance (Discharge System)

As shown in the diagram below, charging is performed for a duration of 30 minutes once the voltage of the capacitor terminal reaches 5.5 V. Then, use a constant current load device and measure the time for the terminal voltage to drop from 3.0 to 2.5 V upon discharge at 0.22 mA per 0.22 F, for example, and calculate the static capacitance according to the equation shown below.

Note: The current value is 1 mA discharged per 1 F.

Capacitance (Discharge System – 3.5 V)

As shown in the diagram below, charging is performed for a duration of 30 minutes once the voltage of the capacitor terminal reaches 3.5 V. Then, use a constant current load device and measure the time for the terminal voltage to drop from 1.8 to 1.5 V upon discharge at 1.0 mA per 1.0 F, for example, and calculate the static capacitance according to the equation shown below.

Capacitance (Discharge System – HV Series)

As shown in the diagram below, charging is performed for a duration of 30 minutes once the voltage of the capacitor terminal reaches maximum operating voltage. Then, use a constant current load device and measure the time for the terminal voltage to drop from 2.0 to 1.5 V upon discharge at 1.0 mA per 1.0 F, and calculate the static capacitance according to the equation shown below.

Measurement Conditions cont'd

Equivalent Series Resistance (ESR)

ESR shall be calculated from the equation below.

Current (at 30 minutes after charging)

Current shall be calculated from the equation below. Prior to measurement, both lead terminals must be short-circuited for a minimum of 30 minutes. The lead terminal connected to the metal can case is connected to the negative side of the power supply.

Eo: 2.5 VDC (HV Series 50 F)
 2.7 VDC (HV Series except 50 F)
 3.0 VDC (3.5 V type)
 5.0 VDC (5.5 V type)
 Rc: 1000 Ω (0.010 F, 0.022 F, 0.047 F)
 100 Ω (0.10 F, 0.22 F, 0.47 F)
 10 Ω (1.0 F, 1.5 F, 2.2 F, 4.7 F)
 2.2 Ω (HV Series)

$$\text{Current} = \frac{V_R}{R_C} \text{ (A)}$$

Self-Discharge Characteristic (0H – 5.5 V Products)

The self-discharge characteristic is measured by charging a voltage of 5.0 VDC (charge protection resistance: 0 Ω) according to the capacitor polarity for 24 hours, then releasing between the pins for 24 hours and measuring the pin-to-pin voltage. The test should be carried out in an environment with an ambient temperature of 25° C or below and relative humidity of 70% RH or below.

the soldering is checked.

4. Dismantling

There is a small amount of electrolyte stored within the capacitor. Do not attempt to dismantle as direct skin contact with the electrolyte will cause burning. This product should be treated as industrial waste and not is not to be disposed of by fre.

Notes on Using Supercapacitors or Electric Double-Layer Capacitors (EDLCs)

1. Circuitry Design

1.1 Useful life

The FC Series Supercapacitor (EDLC) uses an electrolyte in a sealed container. Water in the electrolyte can evaporate while in use over long periods of time at high temperatures, thus reducing electrostatic capacity which in turn will create greater internal resistance. The characteristics of the supercapacitor can vary greatly depending on the environment in which it is used. Basic breakdown mode is an open mode due to increased internal resistance.

1.2 Fail rate in the field

Based on field data, the fail rate is calculated at approximately 0.006 Fit. We estimate that unreported failures are ten times this amount. Therefore, we assume that the fail rate is below 0.06 Fit.

1.3 Exceeding maximum usable voltage

Performance may be compromised and in some cases leakage or damage may occur if applied voltage exceeds maximum working voltage.

1.4 Use of capacitor as a smoothing capacitor (ripple absorption)

As supercapacitors contain a high level of internal resistance, they are not recommended for use as smoothing capacitors in electrical circuits. Performance may be compromised and, in some cases, leakage or damage may occur if a supercapacitor is used in ripple absorption.

1.5 Series connections

As applied voltage balance to each supercapacitor is lost when used in series connection, excess voltage may be applied to some supercapacitors, which will not only negatively affect its performance but may also cause leakage and/or damage. Allow ample margin for maximum voltage or attach a circuit for applying equal voltage to each supercapacitor (partial pressure resistor/voltage divider) when using supercapacitors in series connection. Also, arrange supercapacitors so that the temperature between each capacitor will not vary.

1.6 Case Polarity

The supercapacitor is manufactured so that the terminal on the outer case is negative (-). Align the (-) symbol during use. Even though discharging has been carried out prior to shipping, any residual electrical charge may negatively affect other parts.

1.7 Use next to heat emitters

Useful life of the supercapacitor will be significantly affected if used near heat emitting items (coils, power transistors and posistors, etc.) where the supercapacitor itself may become heated.

1.8 Usage environment

This device cannot be used in any acidic, alkaline or similar type of environment.

Notes on Using Supercapacitors or Electric Double-Layer Capacitors (EDLCs) cont'd

2. Mounting

2.1 Mounting onto a re flow furnace

Except for the FC series, it is not possible to mount this capacitor onto an IR / VPS re flow furnace. Do not immerse the capacitor into a soldering dip tank.

2.2 Flow soldering conditions

See Recommended Re flow Curves in Section – Precautions for Use

2.3 Installation using a soldering iron

Care must be taken to prevent the soldering iron from touching other parts when soldering. Keep the tip of the soldering iron under 400°C and soldering time to within 3 seconds. Always make sure that the temperature

KEMET Electronic Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

KEMET is a registered trademark of KEMET Electronics Corporation.