

# C3M0075120K

Silicon Carbide Power MOSFET

**C3M™ MOSFET Technology**

N-Channel Enhancement Mode

## Features

- C3M™ SiC MOSFET technology
- Optimized package with separate driver source pin
- 8mm of creepage distance between drain and source
- High blocking voltage with low on-resistance
- High-speed switching with low capacitances
- Fast intrinsic diode with low reverse recovery ( $Q_{rr}$ )
- Halogen free, RoHS compliant

## Benefits


- Reduce switching losses and minimize gate ringing
- Higher system efficiency
- Reduce cooling requirements
- Increase power density
- Increase system switching frequency

## Applications

- Renewable energy
- EV battery chargers
- High voltage DC/DC converters
- Switch Mode Power Supplies

$V_{DS}$	1200 V
$I_D @ 25^\circ\text{C}$	30 A
$R_{DS(on)}$	75 mΩ

## Package



Part Number	Package	Marking
C3M0075120K	TO 247-4	C3M0075120K

## Maximum Ratings ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
$V_{DSmax}$	Drain - Source Voltage	1200	V	$V_{GS} = 0 \text{ V}, I_D = 100 \mu\text{A}$	
$V_{GSmax}$	Gate - Source Voltage (dynamic)	-8/+19	V	AC ( $f > 1 \text{ Hz}$ )	Note: 1
$V_{GSop}$	Gate - Source Voltage (static)	-4/+15	V	Static	Note: 2
$I_D$	Continuous Drain Current	30	A	$V_{GS} = 15 \text{ V}, T_c = 25^\circ\text{C}$	Fig. 19
		19.7		$V_{GS} = 15 \text{ V}, T_c = 100^\circ\text{C}$	
$I_{D(pulse)}$	Pulsed Drain Current	80	A	Pulse width $t_p$ limited by $T_{jmax}$	Fig. 22
$P_D$	Power Dissipation	113.6	W	$T_c = 25^\circ\text{C}, T_j = 150^\circ\text{C}$	Fig. 20
$T_J, T_{stg}$	Operating Junction and Storage Temperature	-55 to +150	°C		
$T_L$	Solder Temperature	260	°C	1.6mm (0.063") from case for 10s	

Note (1): When using MOSFET Body Diode  $V_{GSmax} = -4\text{V}/+19\text{V}$

Note (2): MOSFET can also safely operate at 0/+15 V



## Electrical Characteristics ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note		
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	1200			V	$V_{GS} = 0 \text{ V}, I_D = 100 \mu\text{A}$			
$V_{GS(\text{th})}$	Gate Threshold Voltage	1.7	2.5	4.0	V	$V_{DS} = V_{GS}, I_D = 5 \text{ mA}$	Fig. 11		
			2.0		V	$V_{DS} = V_{GS}, I_D = 5 \text{ mA}, T_J = 150^\circ\text{C}$			
$I_{DSS}$	Zero Gate Voltage Drain Current		1	100	$\mu\text{A}$	$V_{DS} = 1200 \text{ V}, V_{GS} = 0 \text{ V}$			
$I_{GSS}$	Gate-Source Leakage Current		10	250	nA	$V_{GS} = 15 \text{ V}, V_{DS} = 0 \text{ V}$			
$R_{DS(\text{on})}$	Drain-Source On-State Resistance		75	90	$\text{m}\Omega$	$V_{GS} = 15 \text{ V}, I_D = 20 \text{ A}$	Fig. 4, 5, 6		
			100			$V_{GS} = 15 \text{ V}, I_D = 20 \text{ A}, T_J = 150^\circ\text{C}$			
$g_{fs}$	Transconductance		9.0		S	$V_{DS} = 20 \text{ V}, I_{DS} = 20 \text{ A}$	Fig. 7		
			8.3			$V_{DS} = 20 \text{ V}, I_{DS} = 20 \text{ A}, T_J = 150^\circ\text{C}$			
$C_{iss}$	Input Capacitance		1350		pF	$V_{GS} = 0 \text{ V}, V_{DS} = 1000 \text{ V}$ $f = 1 \text{ MHz}$ $V_{AC} = 25 \text{ mV}$	Fig. 17, 18		
$C_{oss}$	Output Capacitance		58						
$C_{rss}$	Reverse Transfer Capacitance		3						
$E_{oss}$	$C_{oss}$ Stored Energy		33		$\mu\text{J}$	$V_{DS} = 800 \text{ V}, V_{GS} = -4 \text{ V}/15 \text{ V}, I_D = 20 \text{ A},$ $R_{G(\text{ext})} = 0 \Omega, L = 156 \mu\text{H}, T_J = 150^\circ\text{C}$	Fig. 16		
$E_{ON}$	Turn-On Switching Energy (Body Diode FWD)		330		$\mu\text{J}$				
$E_{OFF}$	Turn-Off Switching Energy (Body Diode FWD)		85						
$t_{d(on)}$	Turn-On Delay Time		22		ns	$V_{DD} = 800 \text{ V}, V_{GS} = -4 \text{ V}/15 \text{ V}$ $I_D = 20 \text{ A}, R_{G(\text{ext})} = 0 \Omega,$ Timing relative to $V_{DS}$ Inductive load	Fig. 27, 28		
$t_r$	Rise Time		11						
$t_{d(off)}$	Turn-Off Delay Time		33						
$t_f$	Fall Time		11						
$R_{G(\text{int})}$	Internal Gate Resistance		10.5		$\Omega$	$f = 1 \text{ MHz}, V_{AC} = 25 \text{ mV}$			
$Q_{gs}$	Gate to Source Charge		14		nC	$V_{DS} = 800 \text{ V}, V_{GS} = -4 \text{ V}/15 \text{ V}$ $I_D = 20 \text{ A}$ Per IEC60747-8-4 pg 21	Fig. 12		
$Q_{gd}$	Gate to Drain Charge		21						
$Q_g$	Total Gate Charge		51						

## Reverse Diode Characteristics ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
$V_{SD}$	Diode Forward Voltage	4.5		V	$V_{GS} = -4 \text{ V}, I_{SD} = 10 \text{ A}$	Fig. 8, 9, 10
		4.0		V	$V_{GS} = -4 \text{ V}, I_{SD} = 10 \text{ A}, T_J = 150^\circ\text{C}$	
$I_S$	Continuous Diode Forward Current		22.4	A	$V_{GS} = -4 \text{ V}$	Note 1
$I_{S,\text{pulse}}$	Diode pulse Current	80		A	$V_{GS} = -4 \text{ V}, \text{ pulse width } t_p \text{ limited by } T_{j\max}$	Note 1
$t_{rr}$	Reverse Recover time	18		ns	$V_{GS} = -4 \text{ V}, I_{SD} = 20 \text{ A}, V_R = 800 \text{ V}$ $dif/dt = 3600 \text{ A}/\mu\text{s}, T_J = 150^\circ\text{C}$	Note 1
$Q_{rr}$	Reverse Recovery Charge	220		nC		
$I_{rrm}$	Peak Reverse Recovery Current	19		A		

## Thermal Characteristics

Symbol	Parameter	Max.	Unit	Test Conditions	Note
$R_{\theta\text{JC}}$	Thermal Resistance from Junction to Case	1.1	$^\circ\text{C}/\text{W}$		Fig. 21
$R_{\theta\text{JA}}$	Thermal Resistance From Junction to Ambient	40			

## Typical Performance

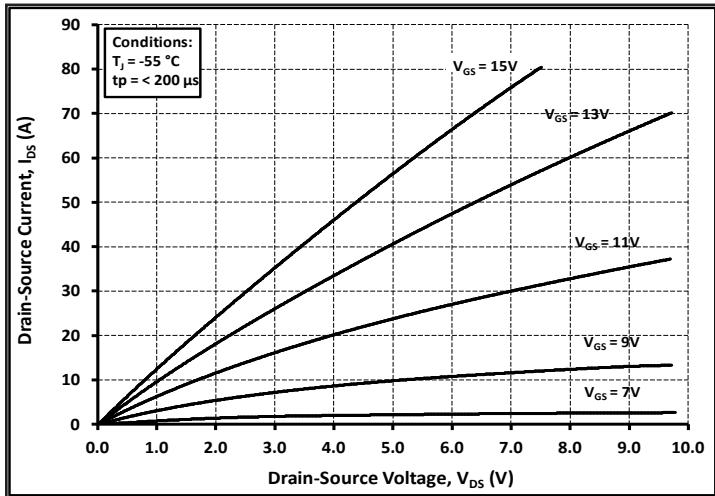


Figure 1. Output Characteristics  $T_J = -55\text{ }^{\circ}\text{C}$

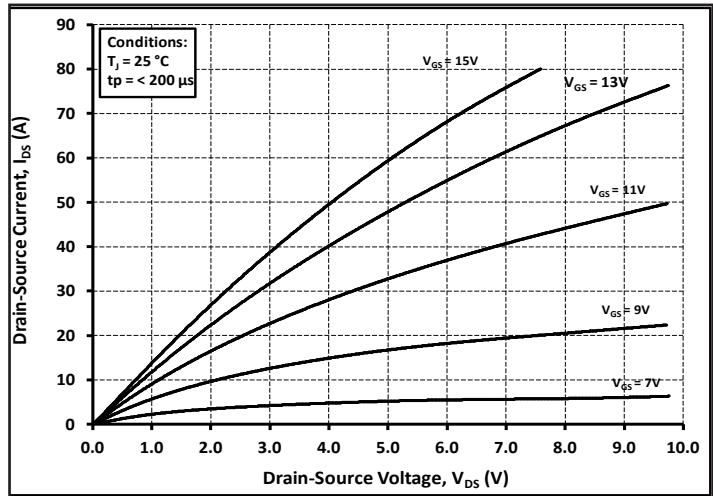


Figure 2. Output Characteristics  $T_J = 25\text{ }^{\circ}\text{C}$

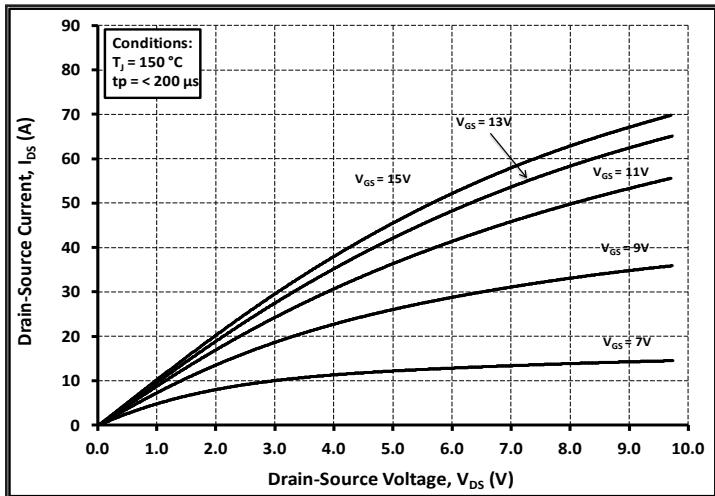


Figure 3. Output Characteristics  $T_J = 150\text{ }^{\circ}\text{C}$

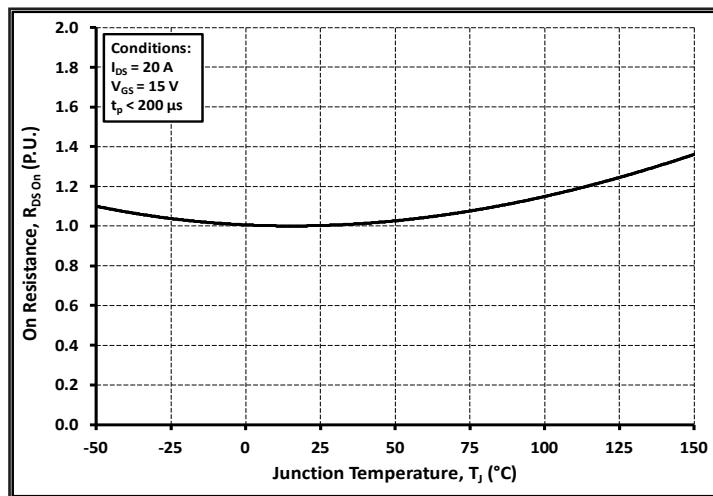


Figure 4. Normalized On-Resistance vs. Temperature

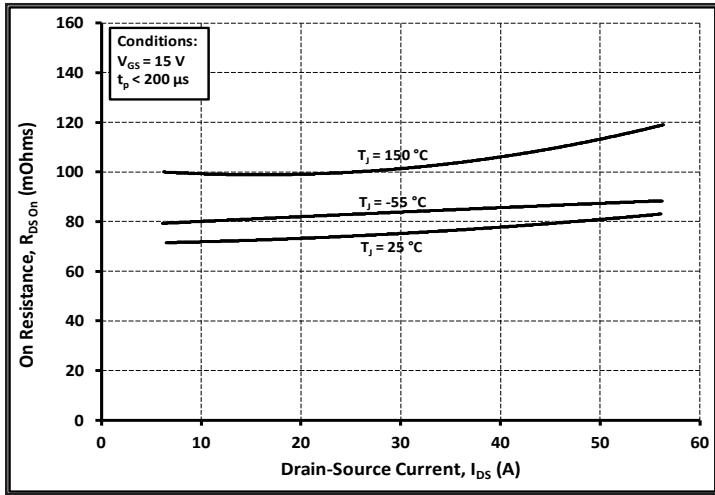


Figure 5. On-Resistance vs. Drain Current  
For Various Temperatures

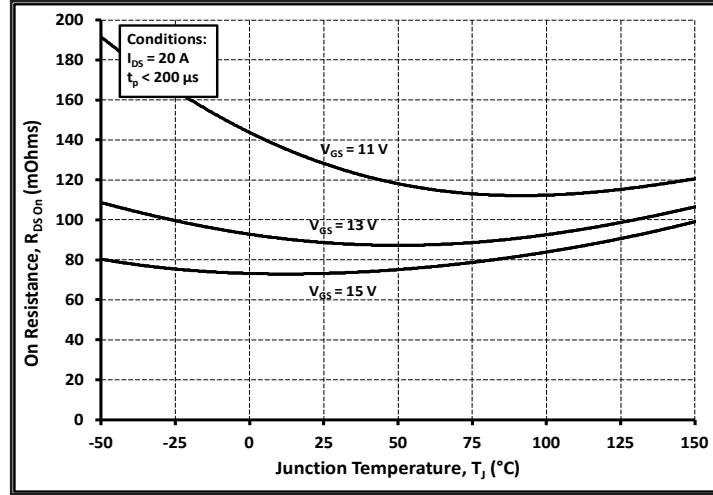


Figure 6. On-Resistance vs. Temperature  
For Various Gate Voltage

## Typical Performance

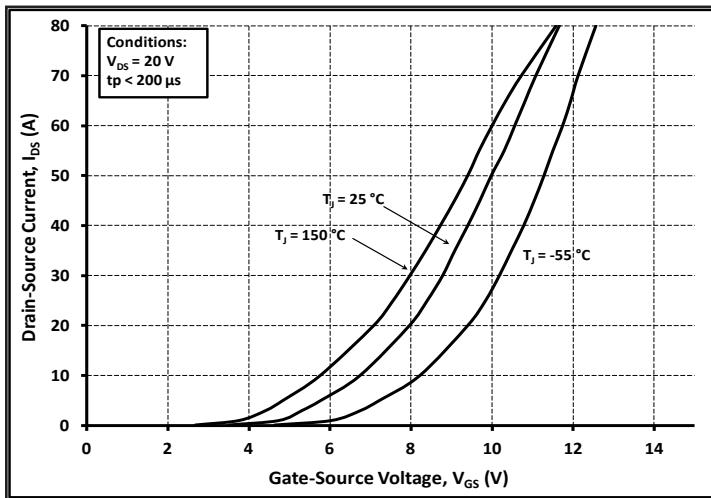


Figure 7. Transfer Characteristic for Various Junction Temperatures

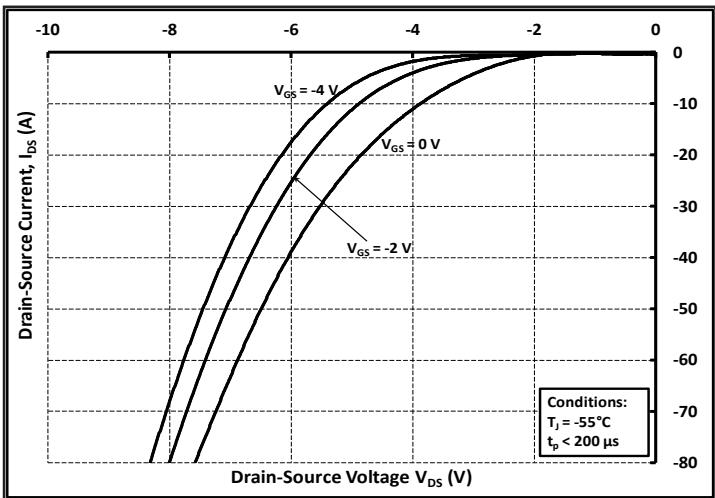


Figure 8. Body Diode Characteristic at  $-55^\circ\text{C}$

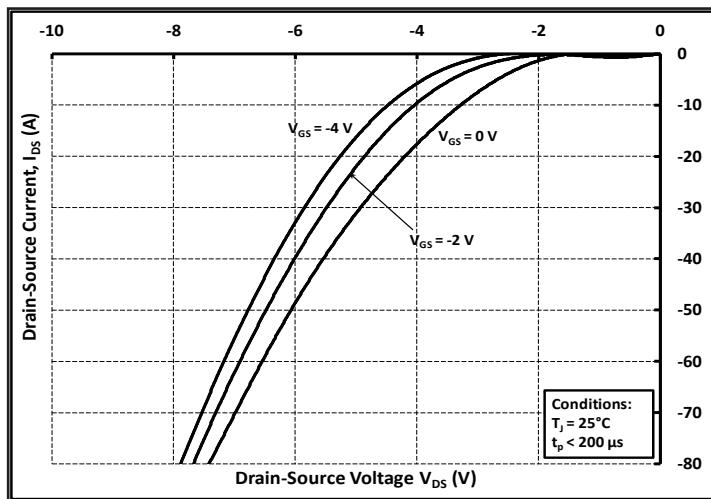


Figure 9. Body Diode Characteristic at  $25^\circ\text{C}$

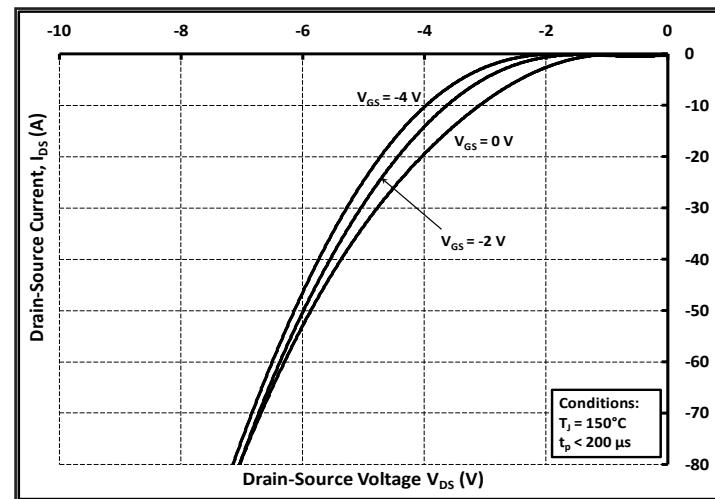


Figure 10. Body Diode Characteristic at  $150^\circ\text{C}$

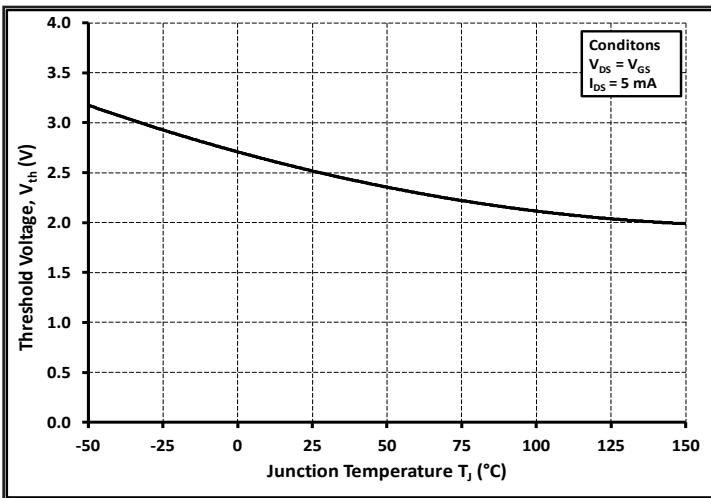


Figure 11. Threshold Voltage vs. Temperature

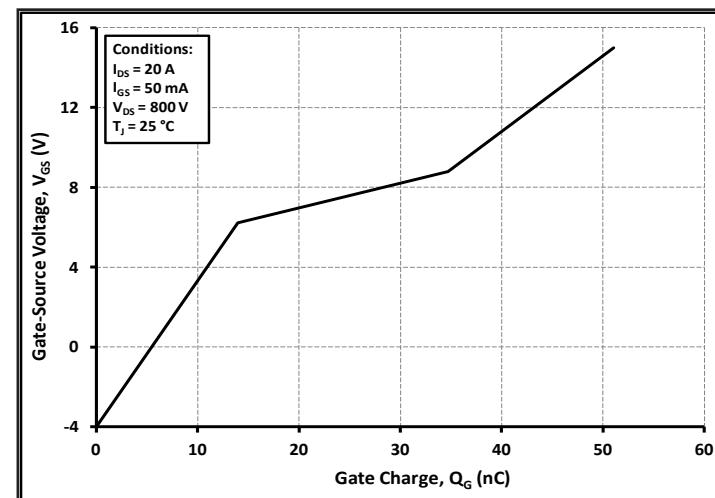


Figure 12. Gate Charge Characteristics

## Typical Performance

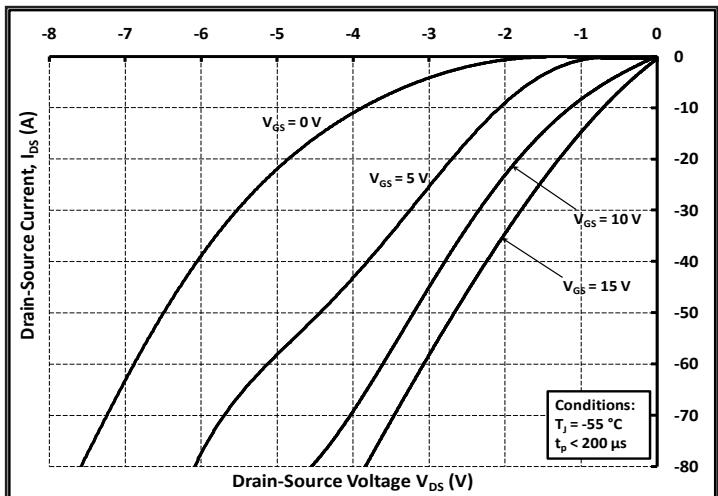


Figure 13. 3rd Quadrant Characteristic at  $-55\text{ }^{\circ}\text{C}$

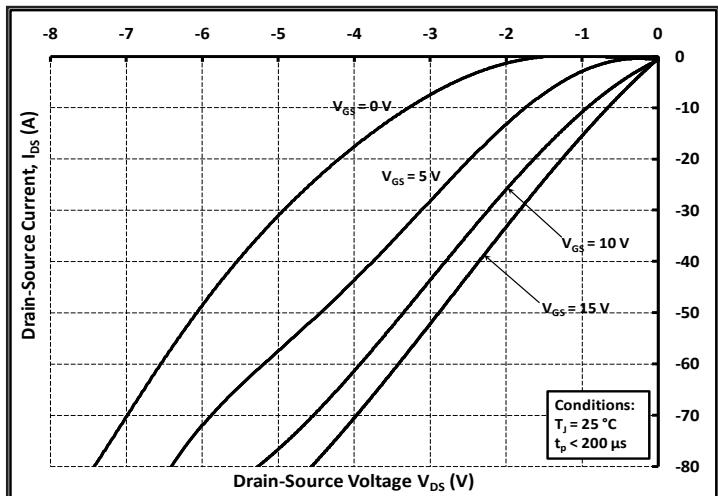


Figure 14. 3rd Quadrant Characteristic at  $25\text{ }^{\circ}\text{C}$

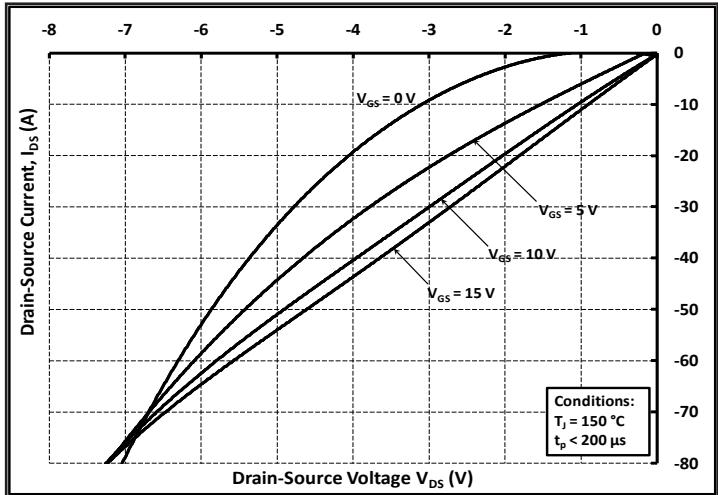


Figure 15. 3rd Quadrant Characteristic at  $150\text{ }^{\circ}\text{C}$

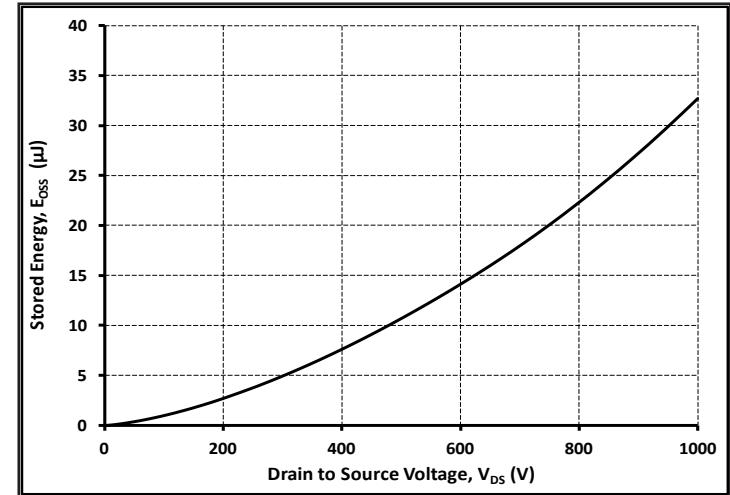


Figure 16. Output Capacitor Stored Energy

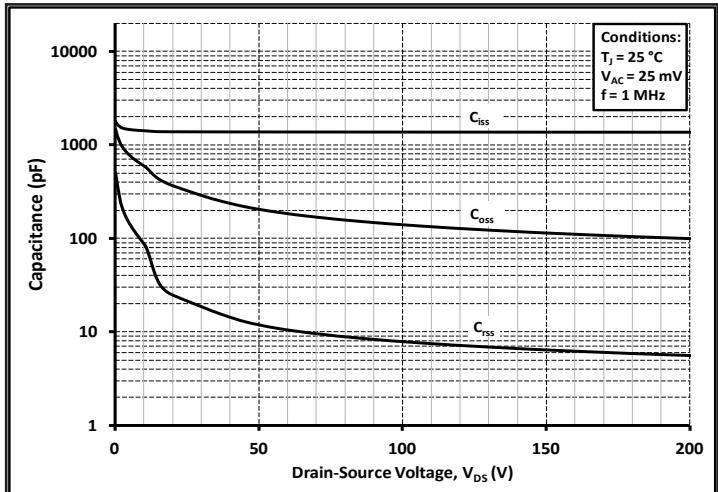


Figure 17. Capacitances vs. Drain-Source Voltage (0 - 200V)

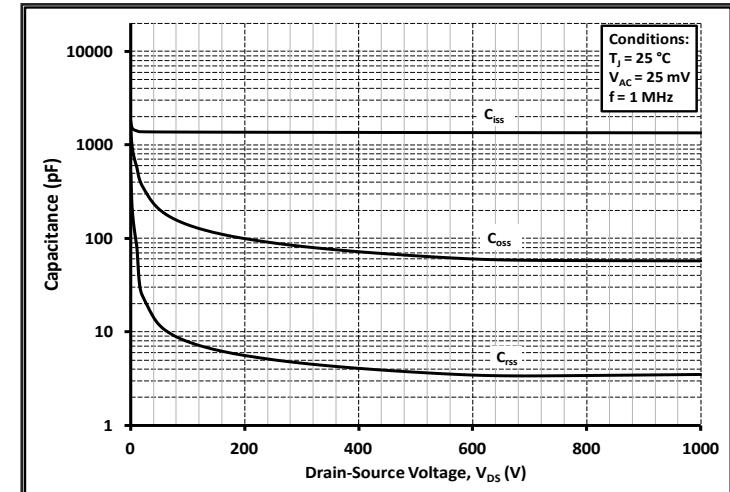


Figure 18. Capacitances vs. Drain-Source Voltage (0 - 1000V)

## Typical Performance

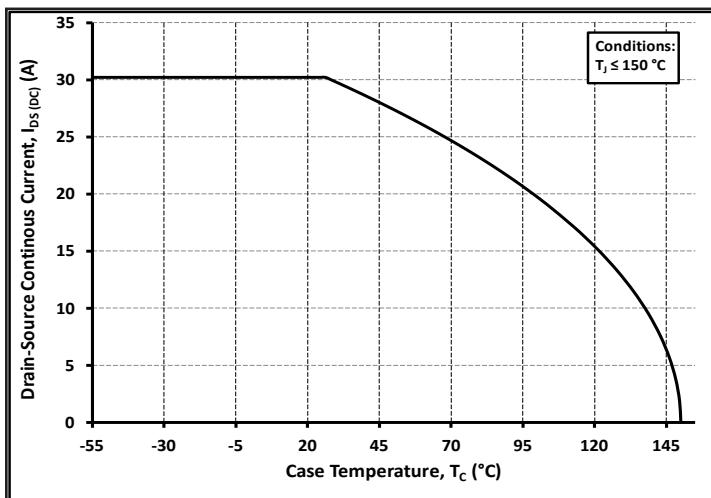


Figure 19. Continuous Drain Current Derating vs.  
Case Temperature

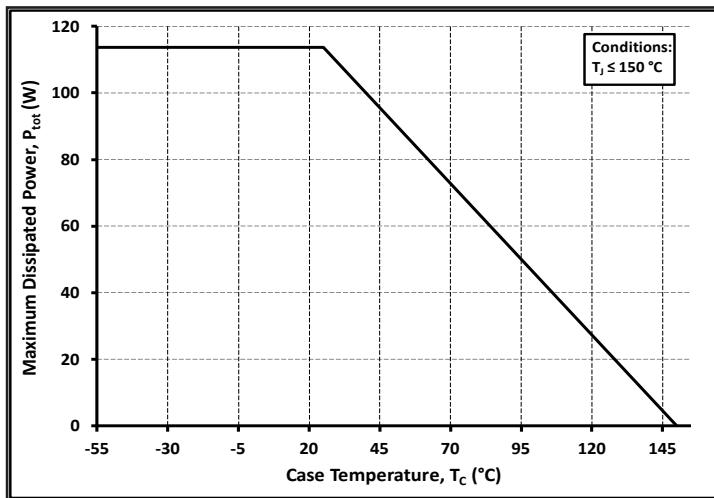


Figure 20. Maximum Power Dissipation Derating vs.  
Case Temperature

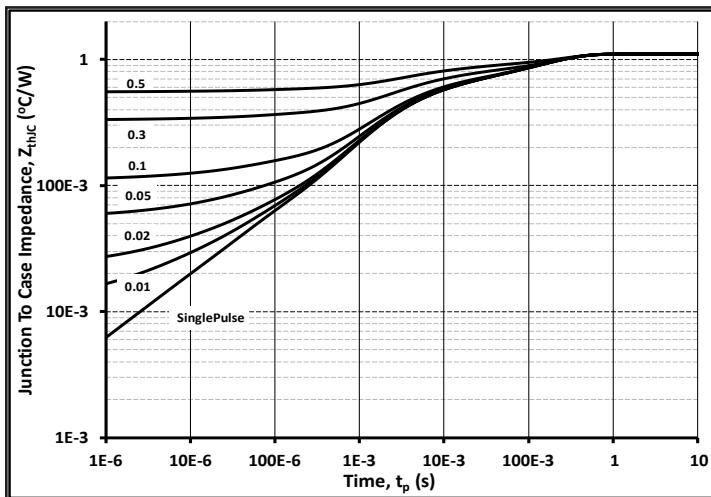


Figure 21. Transient Thermal Impedance  
(Junction - Case)

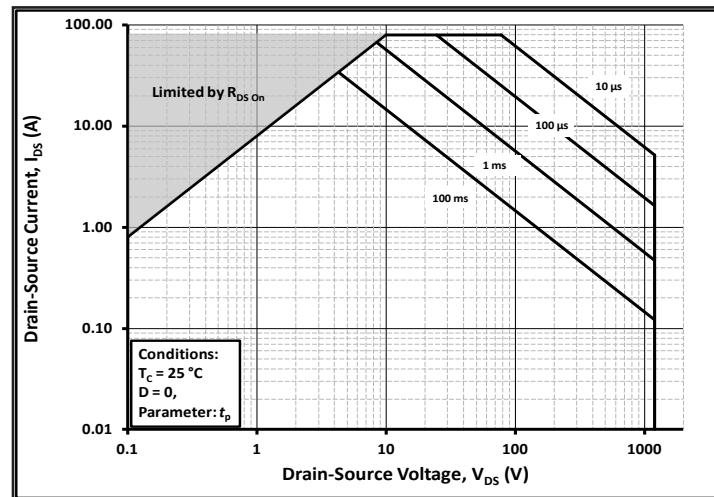


Figure 22. Safe Operating Area

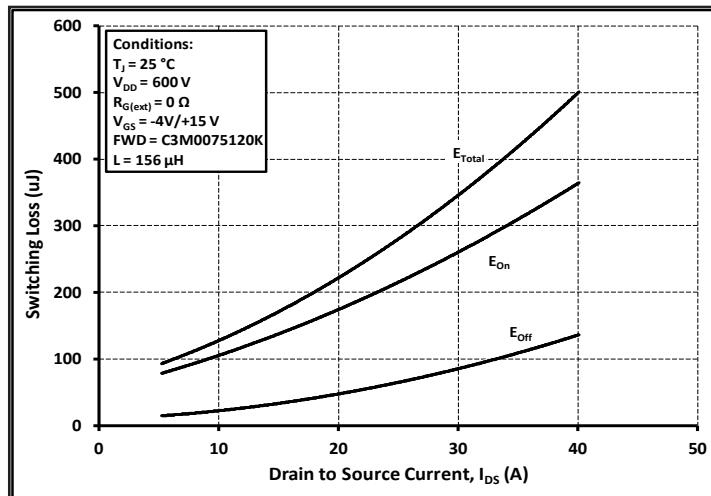


Figure 23. Clamped Inductive Switching Energy vs.  
Drain Current (V<sub>DD</sub> = 600V)

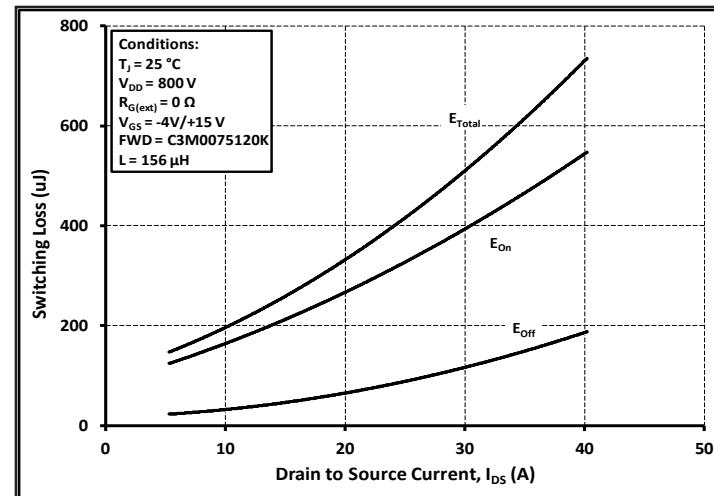


Figure 24. Clamped Inductive Switching Energy vs.  
Drain Current (V<sub>DD</sub> = 800V)

## Typical Performance

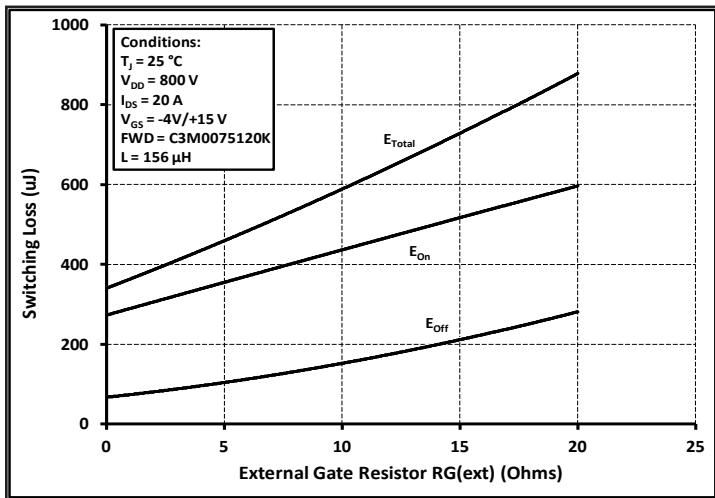


Figure 25. Clamped Inductive Switching Energy vs.  $R_{G(\text{ext})}$

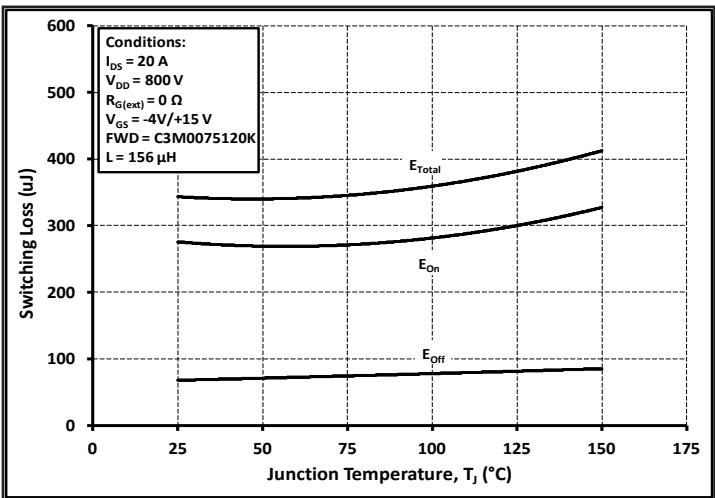


Figure 26. Clamped Inductive Switching Energy vs. Temperature

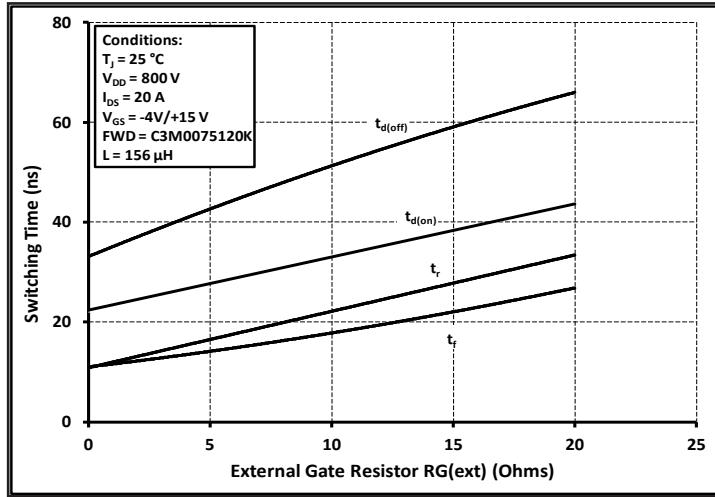


Figure 27. Switching Times vs.  $R_{G(\text{ext})}$

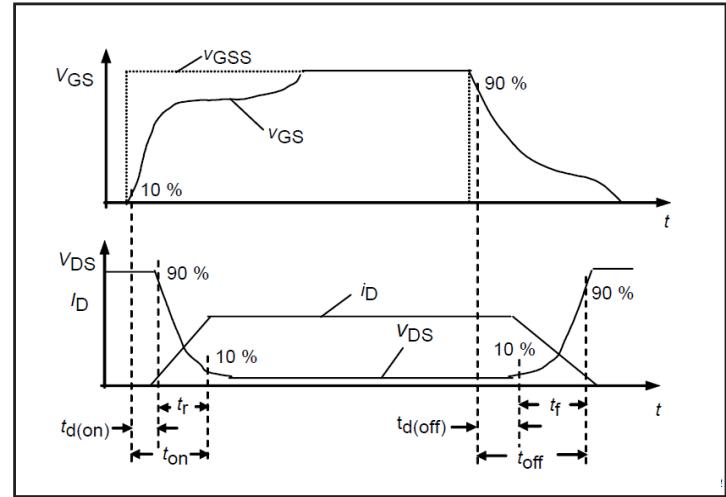


Figure 28. Switching Times Definition

**Test Circuit Schematic**


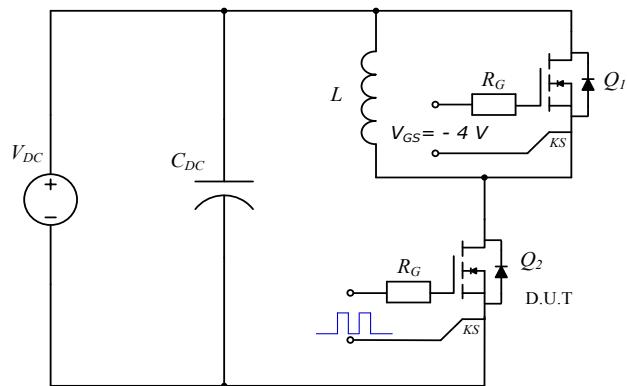


Figure 29. Clamped Inductive Switching Waveform Test Circuit

Note (3): Turn-off and Turn-on switching energy and timing values measured using SiC MOSFET Body Diode as shown above.

## Package Dimensions

Package TO-247-4L

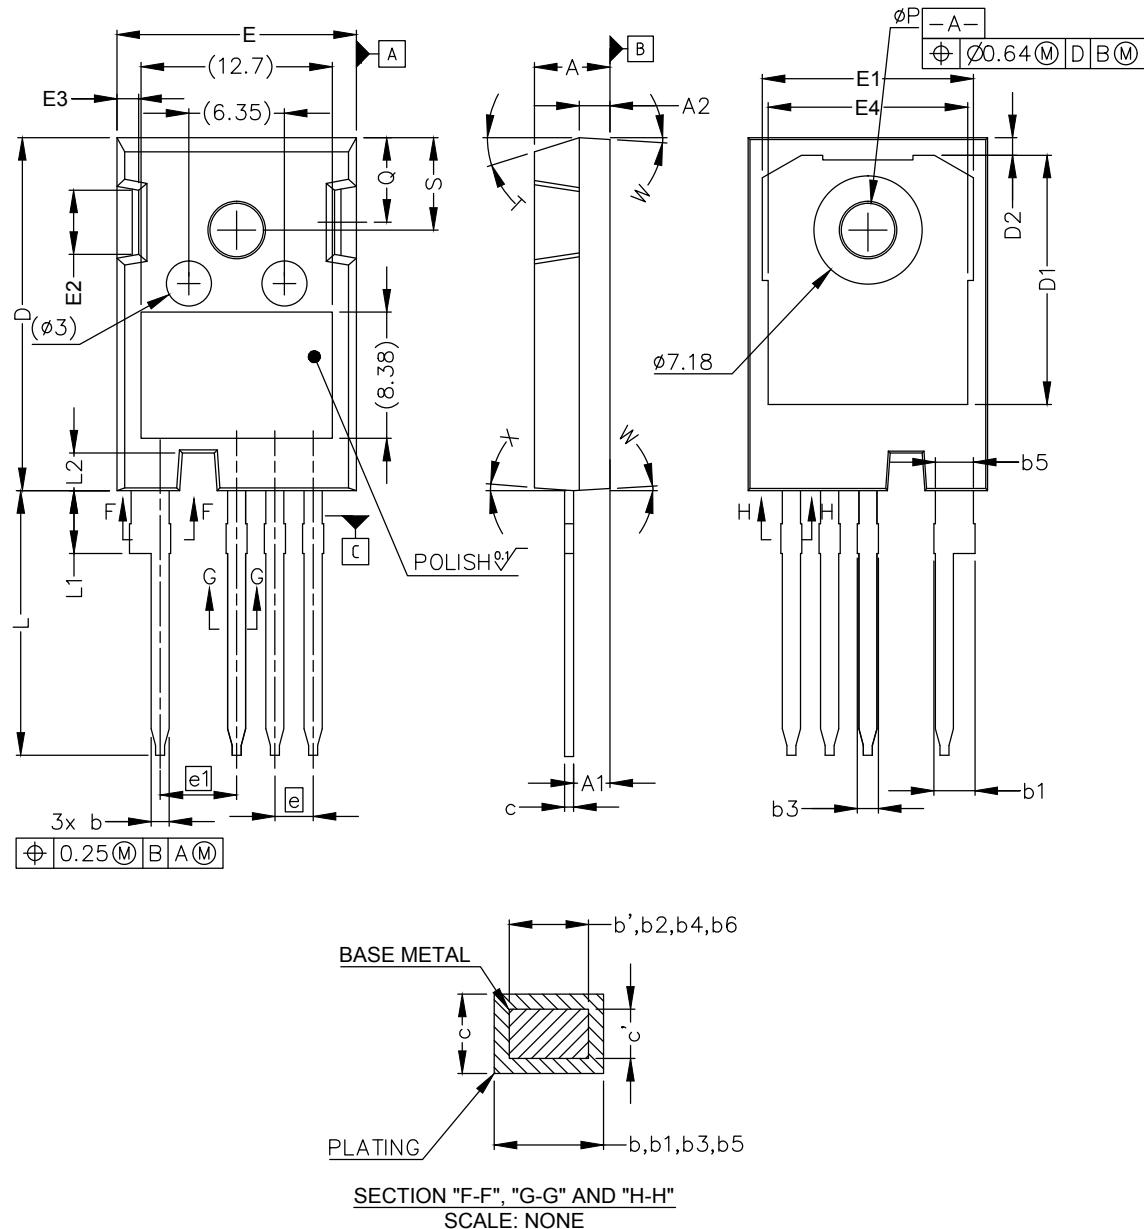


## Package Dimensions

Package TO-247-4L

- NOTE ;
1. ALL METAL SURFACES: TIN PLATED,EXCEPT AREA OF CUT
  2. DIMENSIONING & TOLERANCEING CONFIRM TO  
ASME Y14.5M-1994.
  3. ALL DIMENSIONS ARE IN MILLIMETERS.  
ANGLES ARE IN DEGREES.

SYM	MILLIMETERS		SYM	MILLIMETERS	
	MIN	MAX		MIN	MAX
A	4.83	5.21	E1	13.10	14.15
A1	2.29	2.54	E2	3.68	5.10
A2	1.91	2.16	E3	1.00	1.90
b'	1.07	1.28	E4	12.38	13.43
b	1.07	1.33	e	2.54 BSC	
b1	2.39	2.94	e1	5.08 BSC	
b2	2.39	2.84	N	4	
b3	1.07	1.60	L	17.31	17.82
b4	1.07	1.50	L1	3.97	4.37
b5	2.39	2.69	L2	2.35	2.65
b6	2.39	2.64	øP	3.51	3.65
c'	0.55	0.65	Q	5.49	6.00
c	0.55	0.68	S	6.04	6.30
D	23.30	23.60	T	17.5° REF.	
D1	16.25	17.65	W	3.5 ° REF.	
D2	0.95	1.25	X	4° REF.	
E	15.75	16.13			

## Recommended Solder Pad Layout

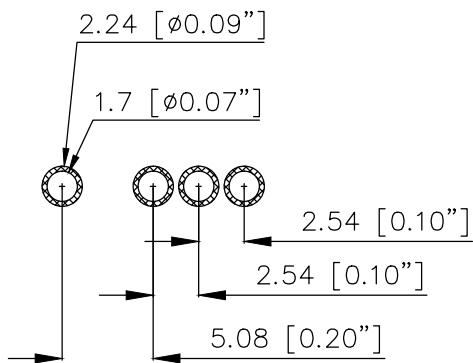

## Notes

---

- **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Documentation sections of [www.cree.com](http://www.cree.com).

- **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, air traffic control systems.

---

## Related Links

---

- **SPICE Models:** <http://wolfspeed.com/power/tools-and-support>
- **SiC MOSFET Isolated Gate Driver reference design:** <http://wolfspeed.com/power/tools-and-support>
- **SiC MOSFET Evaluation Board:** <http://wolfspeed.com/power/tools-and-support>