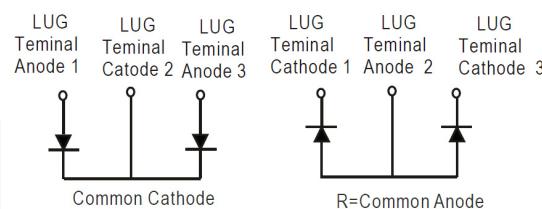


Low V_F Silicon Power Schottky Diode

V_{RRM} = 40 V
I_{F(AV)} = 600 A

Features

- High Surge Capability
- Type 40 V V_{RRM}
- Isolation Type Package
- Electrically Isolated Base Plate
- Not ESD Sensitive

Heavy Three Tower Package

Heavy Three Tower Package

Maximum ratings, at T_j = 25 °C, unless otherwise specified ("R" devices have leads reversed)





Parameter	Symbol	Conditions	MBRTA60040(R)L	Unit
Maximum recurrent peak reverse voltage	V _{RRM}		40	V
Maximum RMS voltage	V _{RMS}		28	V
Maximum DC blocking voltage	V _{DC}		40	V
Operating temperature	T _j		-55 to 150	°C
Storage temperature	T _{stg}		-55 to 150	°C

Electrical characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Conditions	MBRTA60040(R)L	Unit
Average forward current (per pkg)	I _{F(AV)}	T _C = 100 °C	600	A
Peak forward surge current (per leg)	I _{FSM}	t _p = 8.3 ms, half sine	4000	A
Maximum instantaneous forward voltage (per leg)	V _F	I _{FM} = 300 A, T _j = 25 °C	0.60	V
Maximum instantaneous reverse current at rated DC blocking voltage (per leg)	I _R	T _j = 25 °C T _j = 100 °C	5 350	mA


Thermal characteristics

Maximum thermal resistance, junction - case (per leg)	R _{θJC}	0.28	°C/W
---	------------------	------	------

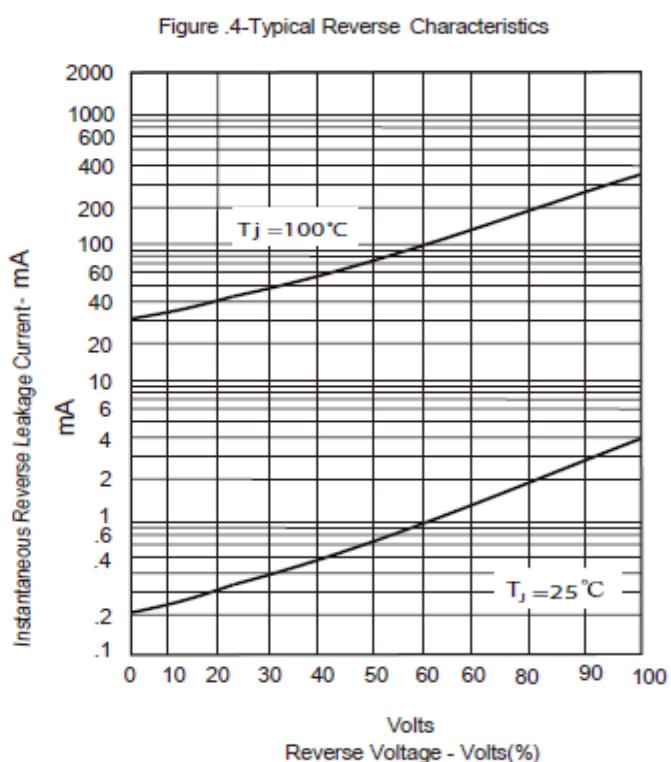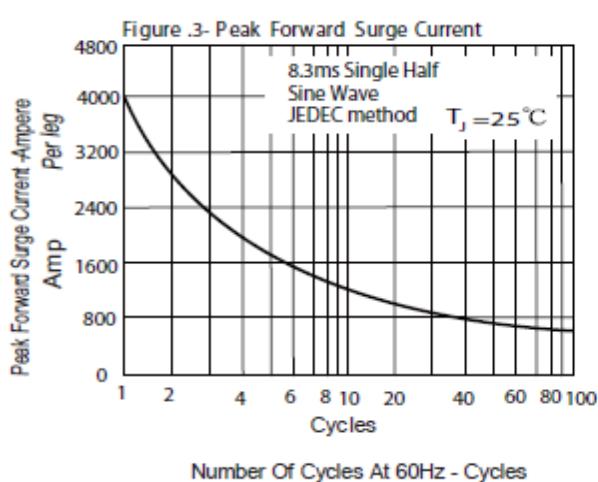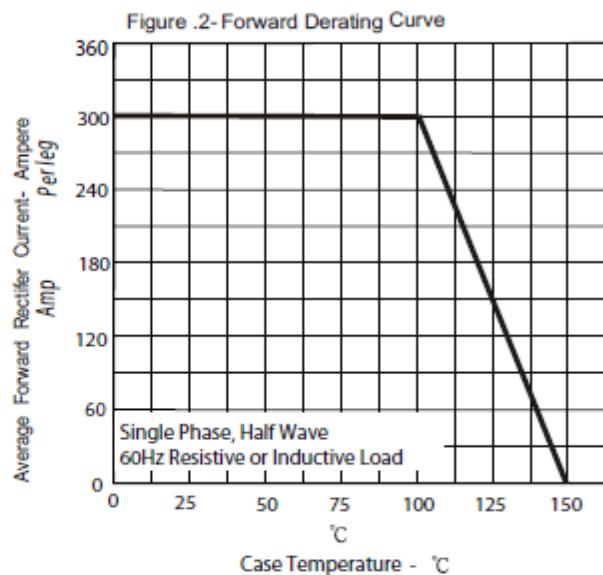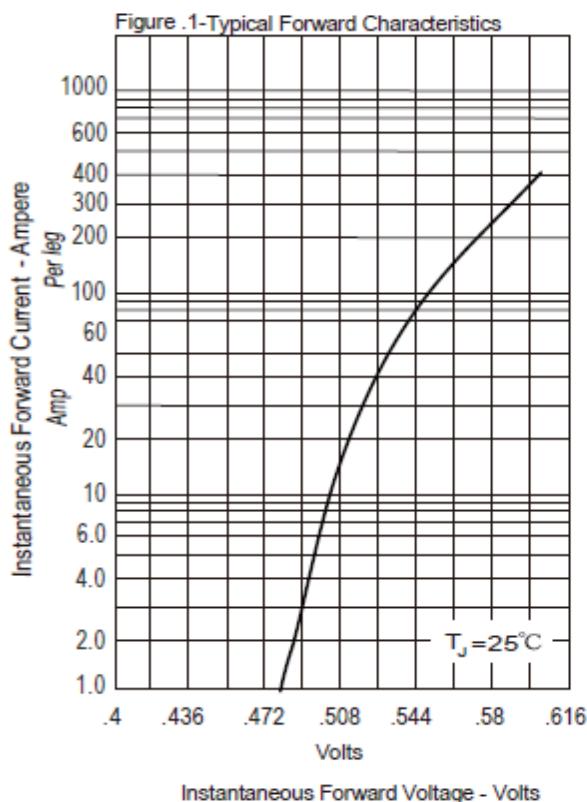

Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

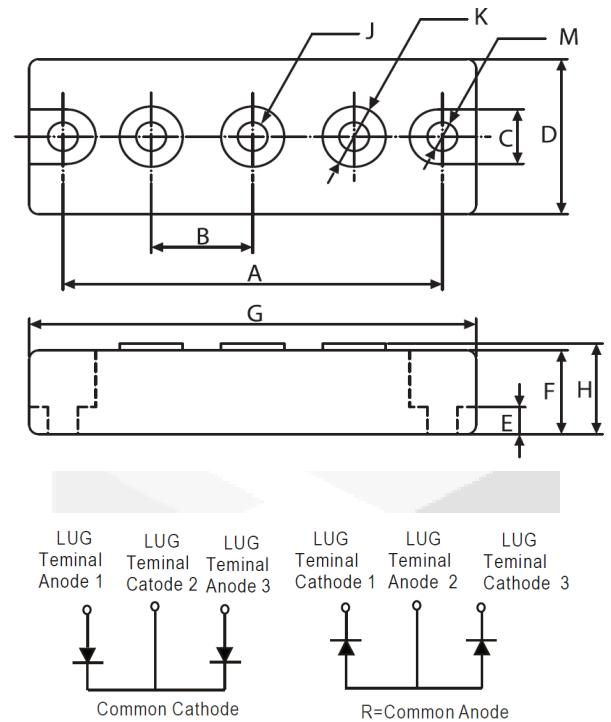

DIMENSIONS				
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	.3.150	NOM	80.01	NOM
B	.872	.892	22.15	22.65
C	.465	.479	11.82	12.18
D	1.337	1.356	33.95	34.45
E	.230	.234	5.84	6.16
F	.725	REF	18.42	REF
G	3.668	3.768	93.17	95.71
H	----	.791	---	20.10
J	1/4 - 20 UNC FULL			
K	.509	.538	12.92	13.68
M	.238	.258	6.05	6.55