

1N5225 THRU 1N5267
ZENER DIODES


Features:

- Silicon Planar Power Zener Diodes
- Standard Zener voltage tolerance is $\pm 5\%$ with a "B" suffix.
- Other tolerances are available upon request.
- These diodes are also available in Mini-MELF case with the type designation ZMM5225 ... ZMM5267, SOT-23 case with the type designation MMBZ5265 ... MMBZ5267 and SOD-23 case with the types designation MMSZ5225 ... MMSZ5267.
- This is a Pb – Free Device
- All SMC parts are traceable to the wafer lot
- Additional testing can be offered upon request

Mechanical data:

- Case: DO-35 Glass Case
- Terminals: Plated axial leads, solderable per LIL-STD 750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: approx. 0.14 grams
- Marking: Part Name, SSG and Date Code

Mechanical Dimensions (In mm) and Marking:

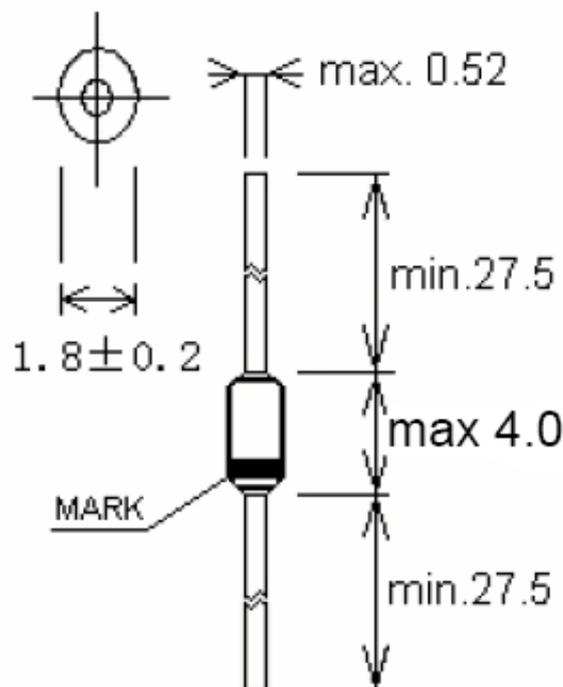


DO-35

Technical Data
Data Sheet N0187, Rev. A

Marking Diagram:

Where XXXXX is YYWWL



1N5225 = Part Name
SSG = SSG
YY = Year
WW = Week
L = Lot Number

Cautions: Molding resin
Epoxy resin UL:94V-0

Ordering Information:

Device	Package	Shipping
1N5225-1N5267	DO-35 (Pb-Free)	5000pcs / tape

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification.

Maximum Ratings Ratings at 25°C ambient temperature unless otherwise specified.

Characteristic	Symbol	Value	Unit
Zener Current (see Table "Characteristics")			
Power Dissipation at T _{amb} = 75°C	P _{tot}	500 ⁽¹⁾	mW
Maximum Junction Temperature	T _J	200	°C
Storage Temperature Range	T _S	- 65 to +200	°C
Case Style	DO-35		

Characteristic	Symbol	Min	Typ	Max	Unit
Thermal Resistance Junction to Ambient Air	R _{θJA}	-	-	300 ⁽¹⁾	°C/W
Forward Voltage at I _F = 200 mA	V _F	-	-	1.1	Volts

NOTES:

Valid provided that leads at a distance of 10 mm from case are kept at ambient temperature.



Technical Data
Data Sheet N0187, Rev. A

Green Products

Type	Nominal Zener Voltage ⁽³⁾ at I _{ZT} V _Z (V)	Test Current I _{ZT} (mA)	Maximum Zener impedance ⁽¹⁾		Typical Temperature Coefficient α _{VZ} (% / K)	Maximum Reverse Leakage Current		Maximum Regulator Current ⁽²⁾ I _{ZM} (mA)
			at I _{ZT} Z _{ZT} (Ω)	at I _{ZK} =0.25mA Z _{ZK} (Ω)		I _R (μA)	Test Voltage V _R (V)	
1N5225	3.0	20	29	1600	-0.075	50	1.0	152
1N5226	3.3	20	28	1600	-0.070	25	1.0	138
1N5227	3.6	20	24	1700	-0.065	15	1.0	126
1N5228	3.9	20	23	1900	-0.060	10	1.0	115
1N5229	4.3	20	22	2000	-0.055	5.0	1.0	106
1N5230	4.7	20	19	1900	±0.030	5.0	2.0	97
1N5231	5.1	20	17	1600	±0.030	5.0	2.0	89
1N5232	5.6	20	11	1600	+0.038	5.0	3.0	81
1N5233	6.0	20	7	1600	+0.038	5.0	3.5	76
1N5234	6.2	20	7	1000	+0.045	5.0	4.0	73
1N5235	6.8	20	5	750	+0.050	3.0	5.0	67
1N5236	7.5	20	6	500	+0.058	3.0	6.0	61
1N5237	8.2	20	8	500	+0.062	3.0	6.5	55
1N5238	8.7	20	8	600	+0.065	3.0	6.5	52
1N5239	9.1	20	10	600	+0.068	3.0	7.0	50
1N5240	10	20	17	600	+0.075	3.0	8.0	45
1N5241	11	20	22	600	+0.076	2.0	8.4	41
1N5242	12	20	30	600	+0.077	1.0	9.1	38
1N5243	13	9.5	13	600	+0.079	0.5	9.9	35
1N5244	14	9.0	15	600	+0.082	0.1	10	32
1N5245	15	8.5	16	600	+0.082	0.1	11	30
1N5246	16	7.8	17	600	+0.083	0.1	12	28
1N5247	17	7.4	19	600	+0.084	0.1	13	27
1N5248	18	7.0	21	600	+0.085	0.1	14	25
1N5249	19	6.6	23	600	+0.086	0.1	14	24
1N5250	20	6.2	25	600	+0.086	0.1	15	23
1N5251	22	5.6	29	600	+0.087	0.1	17	21
1N5252	24	5.2	33	600	+0.087	0.1	18	19.1
1N5253	25	5.0	35	600	+0.089	0.1	19	18.2
1N5254	27	4.6	41	600	+0.090	0.1	21	16.8
1N5255	28	4.5	44	600	+0.091	0.1	21	16.2
1N5256	30	4.2	49	600	+0.091	0.1	23	15.1
1N5257	33	3.8	58	700	+0.092	0.1	25	13.8
1N5258	36	3.4	70	700	+0.093	0.1	27	12.6
1N5259	39	3.2	80	800	+0.094	0.1	30	11.6
1N5260	43	3.0	93	900	+0.095	0.1	33	10.6
1N5261	47	2.7	105	1000	+0.095	0.1	36	9.7
1N5262	51	2.5	125	1100	+0.096	0.1	39	8.9
1N5263	56	2.2	150	1300	+0.096	0.1	43	-
1N5264	60	2.1	170	1400	+0.097	0.1	46	-
1N5265	62	2.0	185	1400	+0.097	0.1	47	-
1N5266	68	1.8	230	1600	+0.097	0.1	52	-
1N5267	75	1.7	270	1700	+0.098	0.1	56	-


NOTES:

- (1) The Zener impedance is derived from the 1 kHz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units
- (2) Valid provided that leads at a distance of 10 mm from case are kept at ambient temperature
- (3) Measured with device junction in thermal equilibrium

RATINGS AND CHARACTERISTIC CURVES 1N5225 THRU 1N5267

Admissible power dissipation versus ambient temperature

Valid provided that leads at a distance of 10 mm
from case are kept at ambient temperature

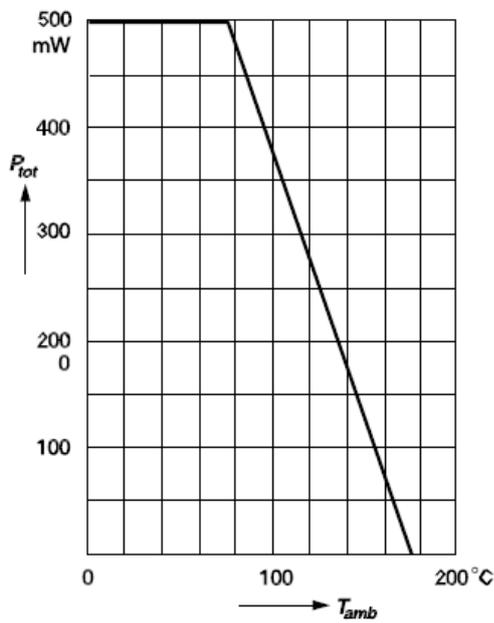

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC - Sangdest Microelectronics (Nanjing) Co., Ltd sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC - Sangdest Microelectronics (Nanjing) Co., Ltd assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..