


RTMN SERIES

High Attenuation Three-Phase External Noise Prevention Filter (Thin Type for Immunity)

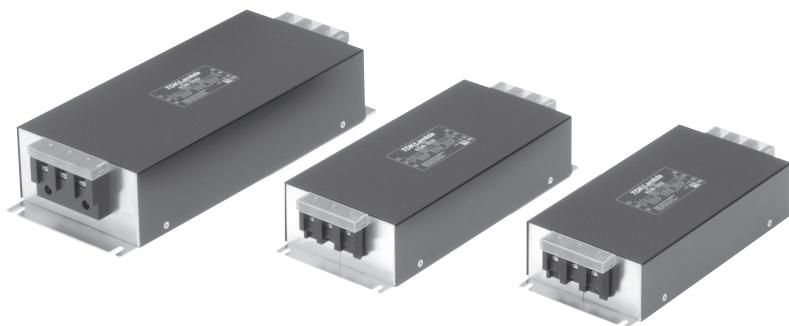


■ FEATURES

- Self-tightening screws and an open/close type cover make wiring work easier.
- Best for high-voltage pulse noise prevention.
- L2 high attenuation; Prevents external noise.
- Compliant with RoHS directives.


■ SAFETY STANDARDS

UL1283	File No. E62388
EN60939	Licence Ref. No. SE/07115-4

■ PRODUCT IDENTIFICATION

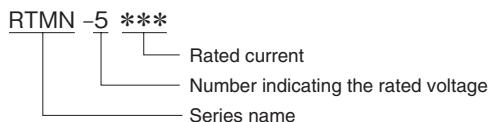

■ CIRCUIT DIAGRAM

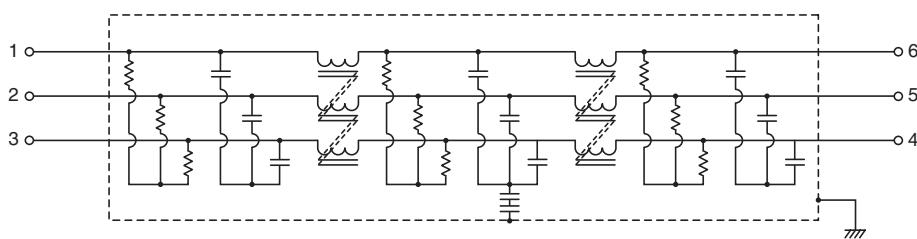


● Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

● All specifications are subject to change without notice.


■ ELECTRICAL CHARACTERISTICS

Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)		Weight (kg)	
									Common mode Differential mode			
									at 25dB	at 25dB		
RTMN-5006	500V	6A	AC.2500V 60s [Between line to ground]	100MΩ min. [DC.500V/ 1min]	2.5mA max. [250V/60Hz] 5mA max. [500V/60Hz]	-25 to +85°C	50°C	290 max. 120 max. 50 max. 26 max. 20 max. 14 max. 10 max.	0.1 to 20	0.1 to 30	0.67	
RTMN-5010		10A							0.1 to 20	0.2 to 30	0.70	
RTMN-5020		20A							0.2 to 20	0.2 to 30	1.00	
RTMN-5030		30A							0.2 to 20	0.3 to 30	1.00	
RTMN-5040		40A							0.2 to 20	0.1 to 30	2.05	
RTMN-5050		50A							0.3 to 20	0.2 to 30	2.05	
RTMN-5060		60A							0.3 to 20	0.3 to 30	2.05	

■ DERATINGS

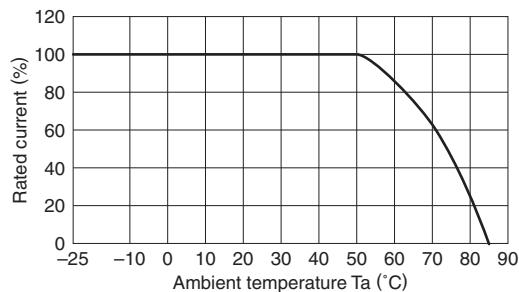


■ SHAPES AND DIMENSIONS

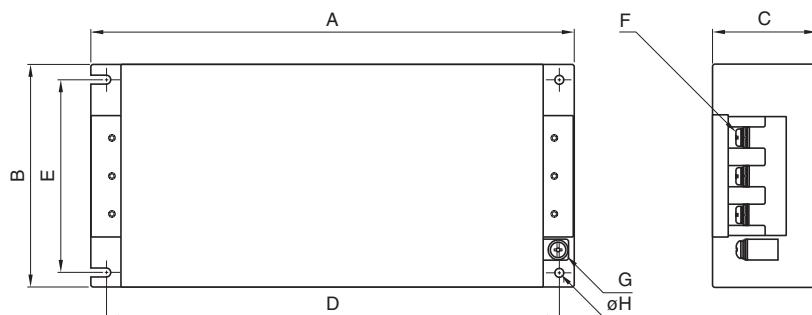


Part No.	A	B	C	D	E	F	G	ø H	Dimensions in mm	
									Recommended clamping torque	
RTMN-5006	210	95	50	195	78	M4	M4	4.5	M4 : 1.27N · m M5 : 2.5N · m	
RTMN-5010										
RTMN-5020	240	105	55	225	85	M4	M4	4.5		
RTMN-5030										
RTMN-5040										
RTMN-5050										
RTMN-5060	300	128	68	280	102	M5	M4	5.5		

■ ATTENUATION vs. FREQUENCY CHARACTERISTICS


RTMN-5006

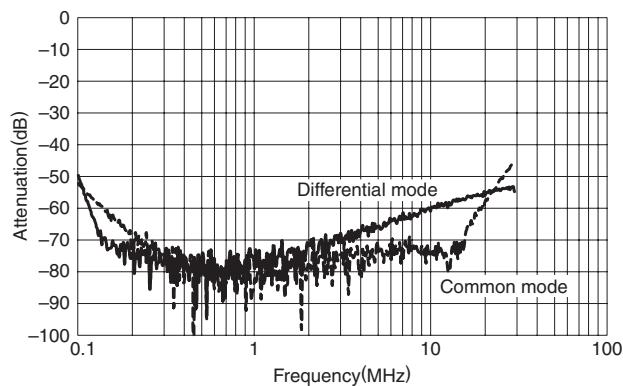


RTMN-5020

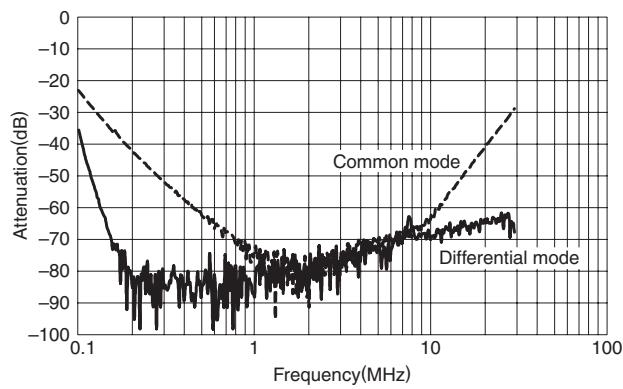


RTMN-5040

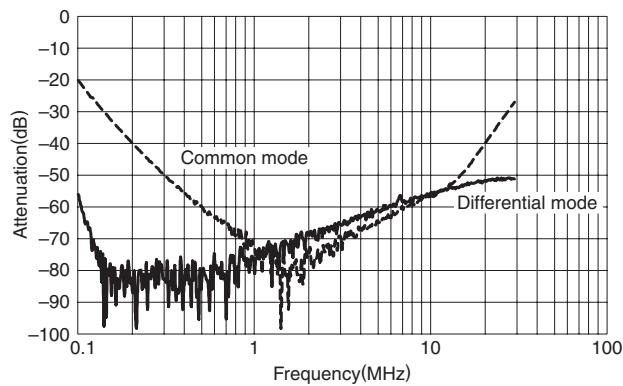


RTMN-5060

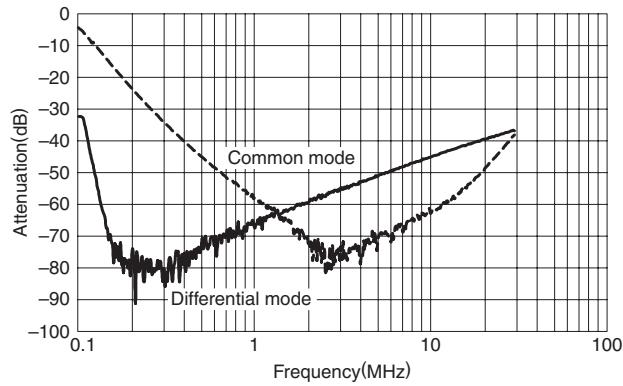


RTMN-5010

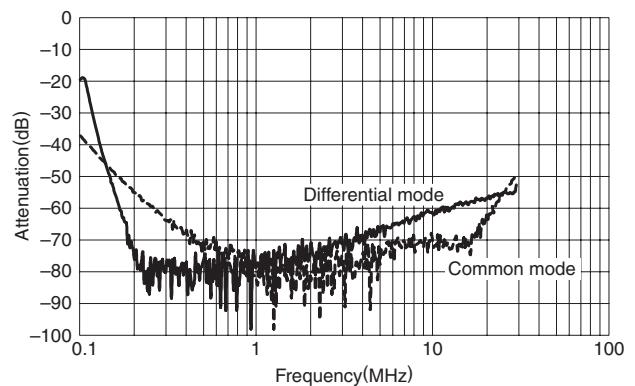

RTMN-5030

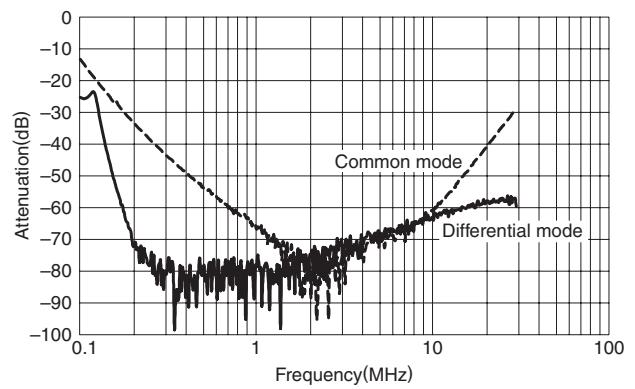


RTMN-5050

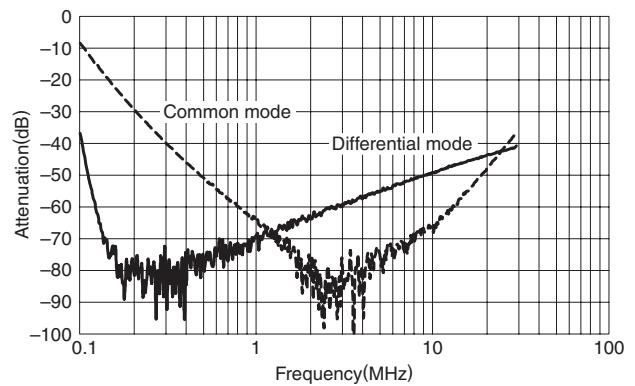


■ PULSE ATTENUATION CHARACTERISTICS


RTMN-5006

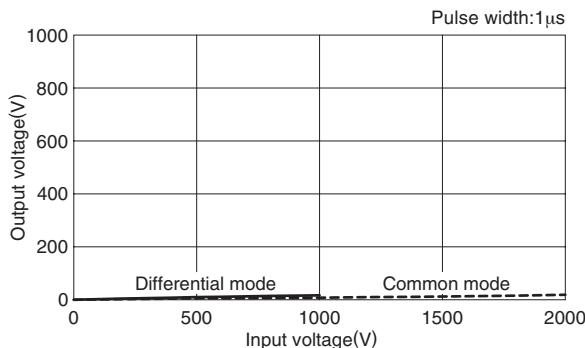


RTMN-5010

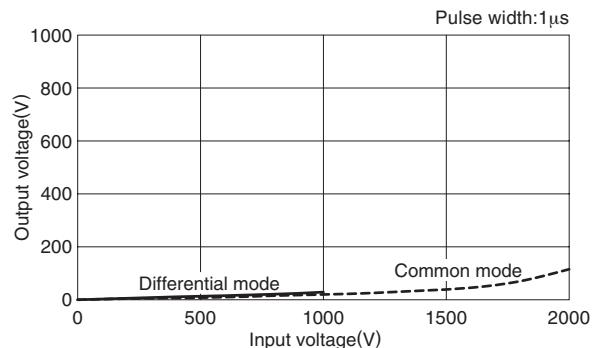


RTMN-5020

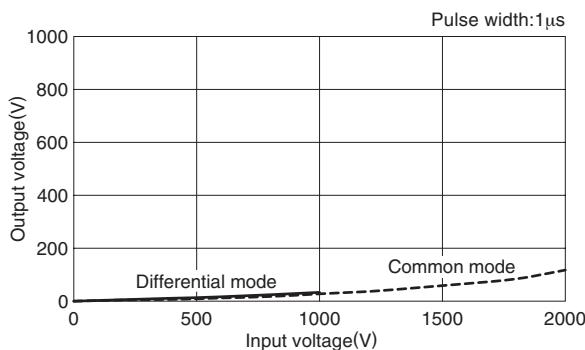


RTMN-5030

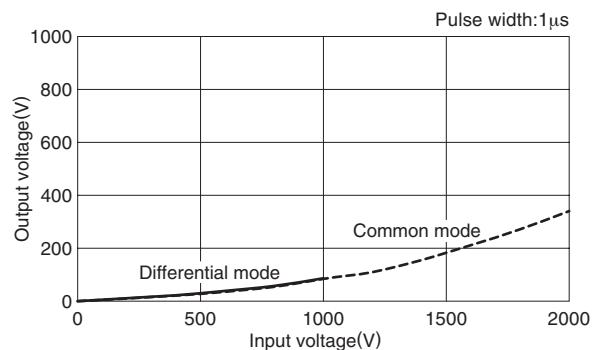

RTMN-5040

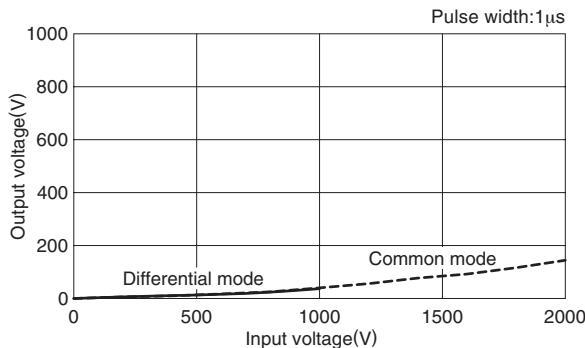

RTMN-5050

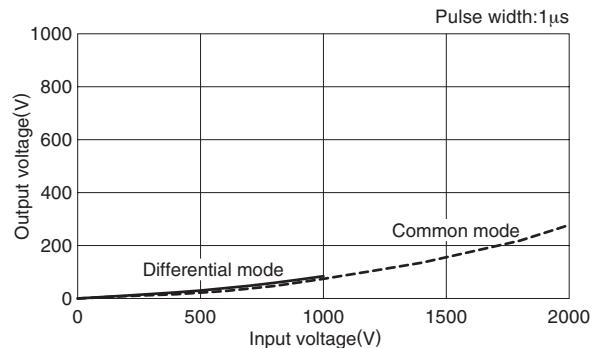

RTMN-5060

