

## 281/282 Series Panel Mount Holders for MICRO™/TR3 Fuses

### 281 Series Panel Mount




Front of Panel Mounting with Push-On / Rear Retaining Nut

### Dimensions units in inch (mm)

#### 0281 0001

#### Front of Panel Mounting with Push-On / Rear Retaining Nut

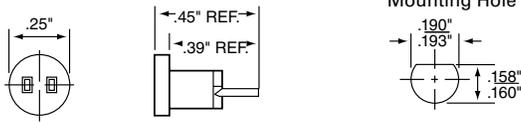

### 282 Series Panel Mount - Sealed/Moisture Resist Knob

Note: These products are shipped unassembled and without fuse device




Rear of Panel Mounting with Threaded Knurled / Front Retaining Nut

Front of Panel Mounting with Threaded Hex / Rear Retaining Nut

### Dimensions units in inch (mm)


#### 0282 0002 and 0282 0008

#### Rear of Panel Mounting with Threaded Knurled / Front Retaining Nut

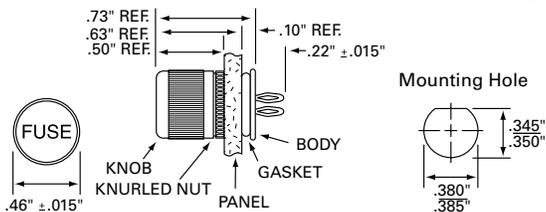

#### 0282 0001 and 0282 0007

#### Front of Panel Mounting with Threaded Hex / Rear Retaining Nut

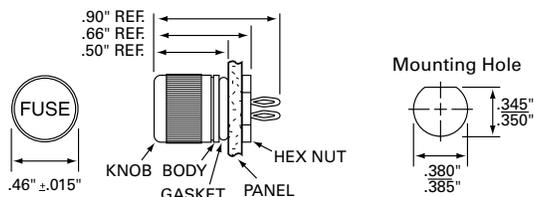

### Product Characteristics

Compatible Fuses	MICRO™/TR3
<b>Description</b>	Panel mount holder designed for Littelfuse MICRO™/TR3 type and other fuse series with .025" diameter leads rated to 5 amps
<b>Electrical Specs</b>	Rated at 5 amperes for any voltage up to 125
<b>Mounting Specs</b>	Maximum panel thickness is .09"
<b>Ambient Temp.</b>	-40°C to +125°C
<b>Retaining Hardware</b>	"Push-On" retaining nut
<b>Molded Material</b>	Black Thermoset
<b>Terminal Material</b>	Beryllium copper with silver plating

Note: Ensure proper fuseholder re-rating.

### Product Characteristics

Compatible Fuses	MICRO™/TR3
<b>Description</b>	RF-shielded and drip-proof screw-on knob design enables use of Littelfuse MICRO™/TR3 fuses when presence of moisture exists at front of panels
<b>Electrical Specs</b>	Rated at 5 amperes for any voltage up to 125
<b>Mounting Specs</b>	Front panel mount, maximum panel thickness: .093" Rear panel mount, maximum panel thickness: .125"
<b>Ambient Temp.</b>	-40°C to +125°C
<b>Mounting Gasket Options</b>	Neoprene (282001, 282002) or Conductive Silicone (282007, 282008)
<b>Retaining Hardware Options</b>	Threaded Hex Nut (282002, 282008) or Threaded Knurled Nut (282001, 282007)
<b>Molded Material</b>	Black thermoset
<b>Housing, Knob and Nut Material</b>	Aluminum, untreated
<b>Terminal Material</b>	Beryllium copper with silver plating
<b>Knob Seal</b>	Buna "N" O-ring inside the knob

Note: Ensure proper fuseholder re-rating.

Ordering Information	
Ordering Number	
<b>02810001H</b>	

Ordering Information		
Ordering Number		Gasket Type
Rear Mounting (Threaded Knurled Nut)	Front Mounting (Threaded Hex Nut)	
<b>02820002Z</b>	<b>02820001Z</b>	Neoprene
<b>02820008Z</b>	<b>02820007Z</b>	Conductive Silicone

Note: These products are shipped unassembled and without fuse device

## Additional Information



**Datasheet  
281 Series**



**Resources  
281 Series**



**Samples  
281 Series**



**Datasheet  
282 Series**



**Resources  
282 Series**



**Samples  
282 Series**