


07

BUSHING FINISH:	SILVER
LEAD FINISH:	SILVER
CAPACITANCE	3000pF MIN.
TEMP. RANGE	-55°C TO +125°C
CURRENT	10 AMPS
WORKING VOLTAGE	85°C 350 VDC 125°C 200 VDC
DC RESISTANCE	.01 OHMS MAX.


IL=PER MIL-STD-220, NO LOAD

FREQ. MHz	I.L. (db)
10	5
50	N/A
100	45
1 GHz	70
10 GHz	70

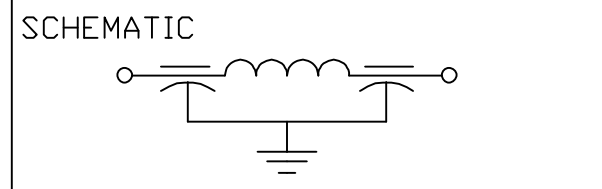

MARKING:
 PART: S1270024
 BAG: SCI 1270-024
 DATE CODE
 LOT NO.
 QTY./BAG (100 MAX.)

SUGGESTED MOUNTING HOLE: ϕ .221
 HARDWARE IS INCLUDED

	7	6	5	4	3	2	1	0	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC. FAIRVIEW PENNSYLVANIA	
	CN 27391-CPD	CN 17644-CPD	CN 171919	CN 154610	CN 153682	CN 150170	CN 148903	CN 148013	CHANGE NOTICE	Fractions $\pm 1/64$		Dwn. D.HUMPHREYS
										Dec. .xx \pm		Date 6-2-06
										Dec. .xxx \pm .010		Engr. STRUCHEN
										Angles $\pm 0^{\circ} 30'$		Scale NONE
										CODE IDENT. NO. DLSP2	Description FILTER SING, PI, BSHG. 1270-024	

