

CentralTM Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
Phone (516) 435-1110 FAX (516) 435-1824

Manufacturers of World Class Discrete Semiconductors

CBR1F-D010 SERIES

1 AMP DUAL IN LINE
FAST RECOVERY
SILICON BRIDGE RECTIFIER

DIP CASE

DESCRIPTION


The CENTRAL SEMICONDUCTOR CBR1F-D010 series types are Silicon Full Wave Bridge Rectifiers mounted in a durable epoxy molded case. This device is ideal for printed circuit board mounting and fits into a standard DIP socket (0.1"/2.54mm spacing).

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

	SYMBOL	CBR1F -D010	CBR1F -D020	CBR1F -D040	CBR1F -D060	CBR1F -D080	CBR1F -D100	UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	100	200	400	600	800	1000	V
DC Blocking Voltage	V _R	100	200	400	600	800	1000	V
RMS Reverse Voltage	V _{R(RMS)}	70	140	280	420	560	700	V
Average Forward Current (T _A = 50°C)	I _O			1.0				A
Peak Forward Surge Current	I _{FSM}			50				A
Operating and Storage Junction Temperature	T _J , T _{stg}			-65 to +150				°C

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
V _F	I _F = 1.0A		1.3	V
I _R	V _R = Rated V _{RRM}		10	μA
I _R	V _R = Rated V _{RRM} , T _A = 100°C		1.0	mA
t _{rr} (100V thru 400V)	I _F = 0.5A, I _R = 1.0A, Recov. to 0.25A		200	ns
t _{rr} (600V)	I _F = 0.5A, I _R = 1.0A, Recov. to 0.25A		300	ns
t _{rr} (800V, 1000V)	I _F = 0.5A, I _R = 1.0A, Recov. to 0.25A		500	ns

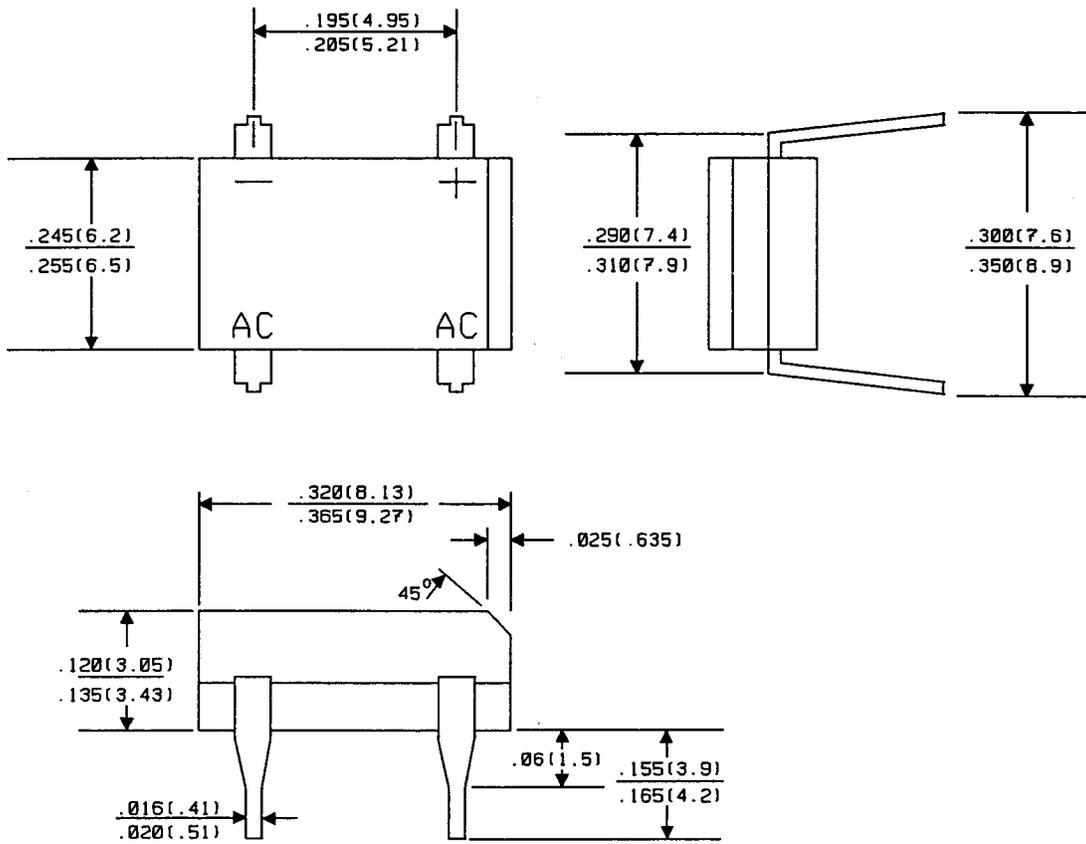

All Dimensions in Inches (mm).

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms