

Discontinued: AC optically coupled isolation type
Last time buy: August 31, 2011

Certified
AQ02A2-ZP3/28VDC AQ02A2-J-ZP3/28VDC,
AQ05A2-ZP3/28VDC, AQ1AD2-3/28VDC
and AQ2AD1-3/28VDC

Certified
AQ02A2-ZP3/28VDC AQ02A2-J-ZP3/28VDC,
AQ05A2-ZP3/28VDC, AQ1AD2-3/28VDC
and AQ2AD1-3/28VDC

Please contact us about
TUV certified products.

Certified
AQ02A2-ZT4/32VDC,
AQ05A2-ZT4/32VDC, AQ1AD2-3/28VDC and
AQ2AD1-3/28VDC



Certified
AQ3A2-ZT4/32VDC,
AQ3A2-J-ZT4/32VDC and
AQ10A2-ZT4/32VDC

Panasonic

ideas for life

High capacity up to 10A
PCB terminal type SSR

AQ1 RELAYS

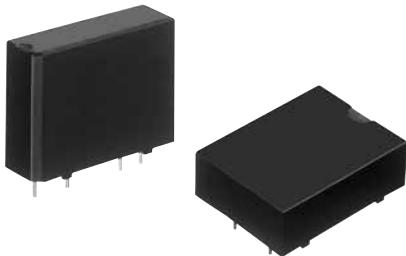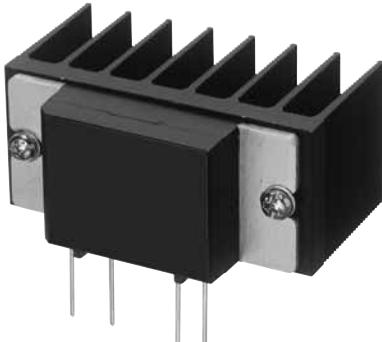

FEATURES

1. 10A high-capacity realized for PC board terminal (when using heat sink)
SSR for compact PC boards with 10 A capacity that is two times greater than our previous model. It is suitable for long-life, highly frequent control.

2. VDE (EN60950-1) reinforced insulation compliant

Fully satisfies demand for safety by guaranteeing compliance with EN60950-1 safety standard and featuring 3,000 V reinforced insulation (AQ3A2-ZT4/32VDC, AQ3A2-J-ZT4/32VDC and AQ10A2-ZT4/32VDC).

3. Superior anti-vibration and anti-shock characteristics

The body is molded as a single unit with flame resistant resin which makes it highly resistant against vibration and shock, and gives it superior protection from environment. The body can also be washed.

4. Vertical types with SIL terminal arrangement and flat types are available.

1) The vertical type is available in thicknesses of 10 mm (2 A and 3 A types) and 12 mm (5 A and 10 A types). Terminal arrangement is SIL in integral multiples of 2.54 mm (0.1 inch).

2) The height of the flat type is 12 mm. The terminal arrangement is DIL in integral multiples of 2.54 mm.

5. Reduced noise generation

The load will operate at close to zero voltage even when the input signal is applied during a cycle. Also, even if an input signal is cancelled during a cycle, the load is cut off at close to zero current. For this reason, hardly any noise is produced and radio frequency interference (RFI) and electromagnetic interference (EMI) are kept to a minimum.

6. Built-in snubber circuit prevents malfunction.

TYPICAL APPLICATIONS

- Printing machines
- Packing machines
- Traffic signal control
- Automatic ticket punchers
- Terminal equipment of data processing
- Computer peripherals
- NC machines

Compliance with RoHS Directive

AQ [] - [] - [] - []

Load current
1 A, 2 A, 3 A, 5 A, 10 A

Load voltage
2: 75 to 250 V AC
D1: 3 to 60 V DC
D2: 10 to 200 V DC

Shape
Nil: Vertical type
J: Flat type

Nil: DC output

ZP: Zero-cross AC output (Photocoupler)

ZT: Zero-cross AC output (Phototriac coupler)

Input voltage
3/28 V DC: 3 to 28 V DC
4/32 V DC: 4 to 32 V DC

* Random types are available upon request.

TYPES

1. AQ1 Solid State Relays

Load	Isolation	Zero-cross function	Type	Load voltage	Load voltage	Input voltage	Part No.
AC	Phototriac coupler	Zero-cross ^{*1}	Vertical	3 A	75 to 250 V AC	4 to 32 V DC	AQ3A2-ZT4/32VDC
			Flat	3 A	75 to 250 V AC	4 to 32 V DC	AQ3A2-J-ZT4/32VDC
			Vertical	10 A ^{*2}	75 to 250 V AC	4 to 32 V DC	AQ10A2-ZT4/32VDC
AC	Optically coupled isolation	Zero-cross [*]	Vertical	2 A	75 to 250 V AC	3 to 28 V DC	AQ2A2-ZP3/28VDC
			Flat	2 A	75 to 250 V AC	3 to 28 V DC	AQ2A2-J-ZP3/28VDC
			Vertical	5 A ^{*3}	75 to 250 V AC	3 to 28 V DC	AQ5A2-ZP3/28VDC
DC		-	Vertical	1 A	10 to 200 V DC	3 to 28 V DC	AQ1AD2-3/28VDC
			Vertical	2 A	3 to 60 V DC	3 to 28 V DC	AQ2AD1-3/28VDC

Standard packing: Carton 20 pcs., Case 200 pcs.

Notes: *1 Random type also available. Please inquire.

*2 5 A without heat sink

*3 3 A without heat sink

2. Heat sink for AQ1 solid state relay

Product name	Part No.
Heat sink for AQ5A2-ZP3/28VDC and AQ10A2-ZT4/32VDC	AQ-HS-5A

Standard packing: Carton 20 pcs., Case 200 pcs.

SPECIFICATIONS

1. Rating (at 20°C 68°F, Ripple factor: less than 1%)

Item	Type	AC output type				Remarks	
		Zero-cross					
		3 A type	10 A type	2 A type	5 A type		
Input side	Input voltage	4 to 32 V DC		3 to 28 V DC			
	Input impedance	—		Approx. 1.6 kΩ			
	Input current, max.	20 mA		—			
	Drop-out voltage, min.	1.0 V		0.8 V			
Load side	Max. load current	3 A	10 A ^{*1}	2 A	5 A ^{*2}	Refer to REFERENCE DATA "1. Load current vs. ambient temperature characteristics".	
	Load voltage	75 to 250 V AC			10 to 200 V DC	3 to 60 V DC	
	Non-repetitive surge current	100 A		80 A	100 A	AC: In one cycle at 60 Hz, DC: 1s	
	Max. "OFF-state" leakage current	5 mA			1 mA	AC: at 200 V, 60Hz DC: When maximum load voltage is applied.	
	Max. "ON-state" voltage drop	1.6 V			1.6 V	2.3 V	
	Min. load current	50 mA ^{*3}			5 mA ^{*3}	At Max. carrying current	

Notes: *1 When heat sink (AQ-HS-5A) is installed. The max. load current is 5 A when heat sink is not installed.

*2 When heat sink (AQ-HS-5A) is installed. The max. load current is 3 A when heat sink is not installed.

*3 When load current is below the rating, refer to "Cautions for Use".

2. Characteristics (at 20°C 68°F, Ripple factor: less than 1%)

Item	Type	AC output				DC output	Remarks				
		Zero-cross									
		3 A type	10 A type	2 A type	5 A type						
Operate time, Max.	1/2 cycle of voltage sine wave + 1 ms					0.5 ms					
Release time, Max.	1/2 cycle of voltage sine wave + 1 ms					2 ms					
Insulation resistance, Min.	100 M Ω for input, output and case					100 M Ω for input, output	at 500 V DC				
Breakdown voltage	4,000 Vrms between input and output 2,500 Vrms between input, output and case		 3,000 Vrms between input and output	3,000 Vrms between input and output 1,500 Vrms between input, output and case		3,000 Vrms between input-output	For 1 minute				
Vibration resistance	Destructive	10 to 55 Hz at double amplitude of 2 mm				10 to 55 Hz at double amplitude of 2 mm	1 hour for X, Y, Z axis				
	Functional	10 to 55 Hz at double amplitude of 2 mm				10 to 55 Hz at double amplitude of 2 mm	10 minutes for X, Y, Z axis				
Shock resistance	Destructive	Min. 980 m/s ² {100 G}				Min. 980 m/s ² {100 G}	5 times each for X, Y, Z axis				
	Functional	Min. 980 m/s ² {100 G}				Min. 980 m/s ² {100 G}	4 times each for X, Y, Z axis				
Ambient temperature	-30°C to +80°C -22°F to +176°F										
Storage temperature	-30°C to +100°C -22°F to +212°F										
Operational method	Zero-cross (Turn-ON and Turn-OFF)				—						




Discontinued: AC optically coupled isolation type
Last time buy: August 31, 2011


AQ1

REFERENCE DATA


1.-(1) Load current vs. ambient temperature
 (AC output, 3 A type) Part No.: AQ3A2-ZT4/32VDC
 and AQ3A2-J-ZT4/32VDC
 Allowable ambient temperature:
 -30°C to $+80^{\circ}\text{C}$ -22°F to $+176^{\circ}\text{F}$

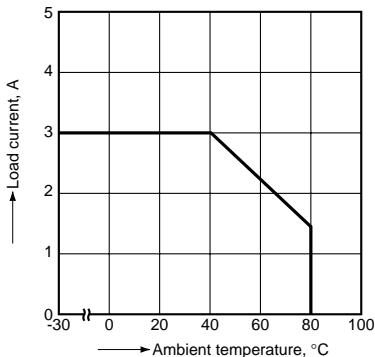


1.-2) Load current vs. ambient temperature
 (AC output, 10 A type) Part No.: AQ10A2-ZT4/32VDC
 (A) When not using a heat sink
 (B) When using a standard heat sink AQ-HS-5A
 (When attached to a heat sink, use a heat conductive compound (Ex. Toshiba silicone YG6111 or TSK5303) of similar coating to improve cooling.)

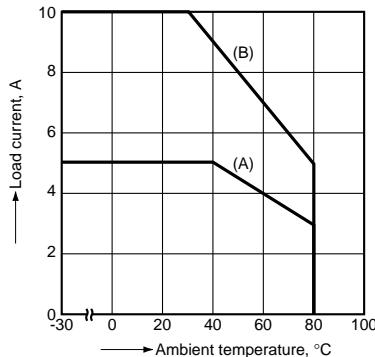


1.-3) Load current vs. ambient temperature
 (AC output, 2 A type) Part No.: AQ2A2-ZP3/28VDC
 and AQ2A2-J-ZP3/28VDC
 Allowable ambient temperature:
 -30°C to $+80^{\circ}\text{C}$ -22°F to $+176^{\circ}\text{F}$

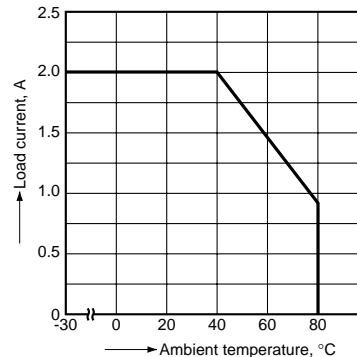


1.-4) Load current vs. ambient temperature
 (AC output, 5 A type) Part No.: AQ5A2-ZP3/28VDC
 (A) When not using a heat sink
 (B) When using a standard heat sink AQ-HS-5A
 (When attached to a heat sink, use a heat conductive compound (Ex. Toshiba silicone YG6111 or TSK5303) of similar coating to improve cooling.)

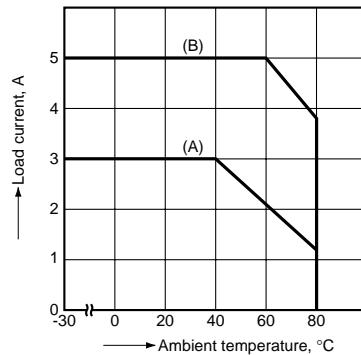


1.-5) Load current vs. ambient temperature
 (DC output, 1 A and 2 A types) Part No.: AQ1AD2-3/28VDC and AQ2AD1-3/28VDC
 Allowable ambient temperature:
 -30°C to $+80^{\circ}\text{C}$ -22°F to $+176^{\circ}\text{F}$

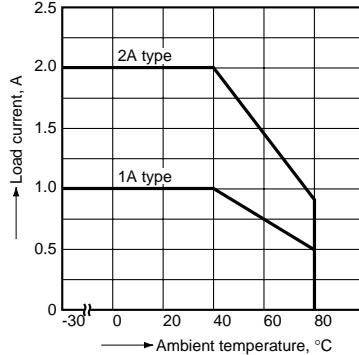


2.-1) Non-repetitive surge current vs. carrying time
 (AC output, 3 A and 10 A types)
 Part No.: AQ3A2-ZT4/32VDC, AQ3A2-J-ZT4/32VDC and AQ10A2-ZT4/32VDC

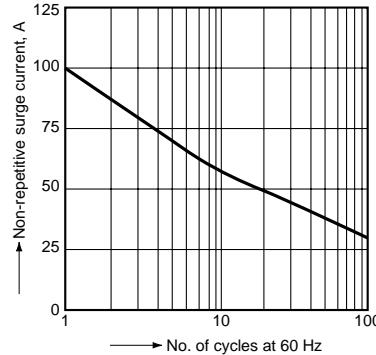


2.-2) Non-repetitive surge current vs. carrying time
 (AC output, 2 A type) Part No.: AQ2A2-ZP3/28VDC and AQ2A2-J-ZP3/28VDC

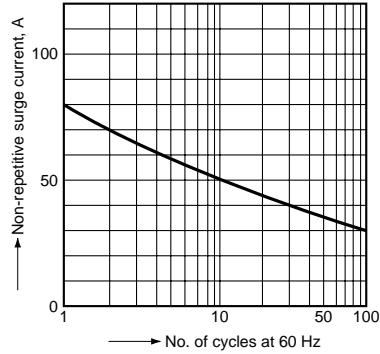

2.-3) Non-repetitive surge current vs. carrying time
 (AC output, 5 A type) Part No.: AQ5A2-ZP3/28VDC

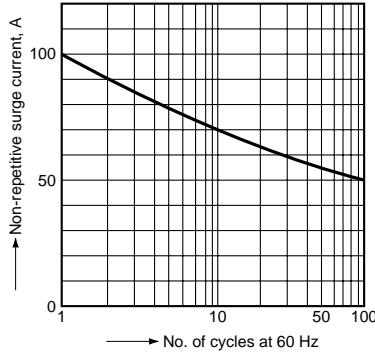


2.-4) Non-repetitive surge current vs. carrying time
 (DC output) Part No.: AQ1AD2-3/28VDC and AQ2AD1-3/28VDC

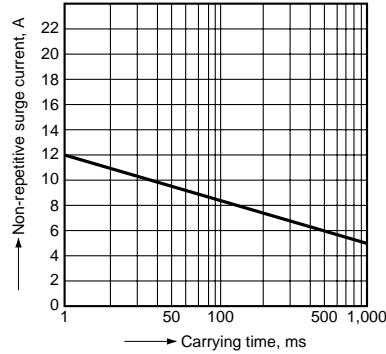

3.-(1) Input current vs. input voltage characteristics

(AC output, 3 A and 10 A types)

Part No.: AQ3A2-ZT4/32VDC, AQ3A2-J-ZT4/32VDC
and AQ10A2-ZT4/32VDC

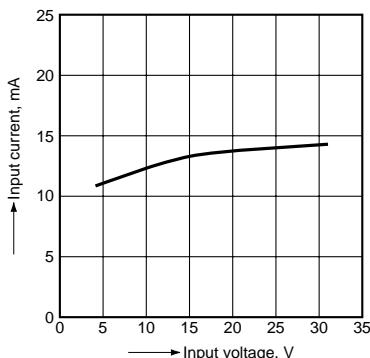


3.-(2) Input current vs. input voltage characteristics

(AC output, 2 A and 5 A types)

**⚠ Part No.: AQ2A2-ZP3/28VDC, AQ2A2-J-ZP3/28VDC
and AQ5A2-ZP3/28VDC**

(DC output)


Part No.: AQ1AD2-3/28VDC and AQ2AD1-3/28VDC

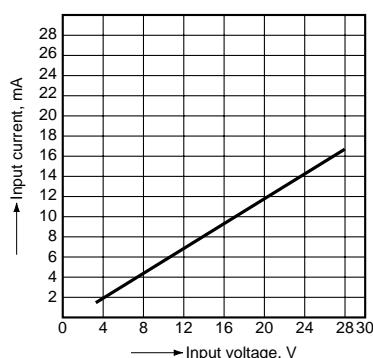

4.-(1) Load current vs. ambient temperature characteristics for adjacent mounting

(AC output, 3A vertical type)


Part No.: AQ3A2-ZT4/32VDC

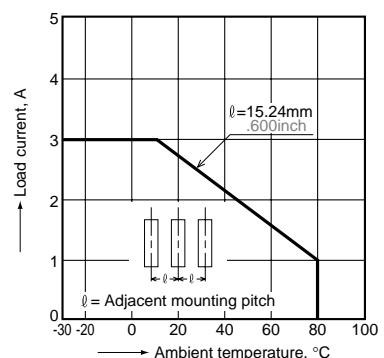

4.-(2) Load current vs. ambient temperature characteristics for adjacent mounting

(AC output, 10A type)

Part No.: AQ10A2-ZT4/32VDC (without heat sink)

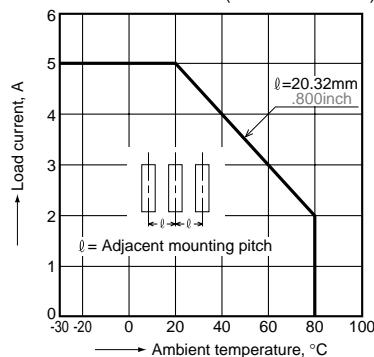


DIMENSIONS (mm inch)

1. AC output, **⚠** and 3A types (Vertical)

CAD Data




The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>

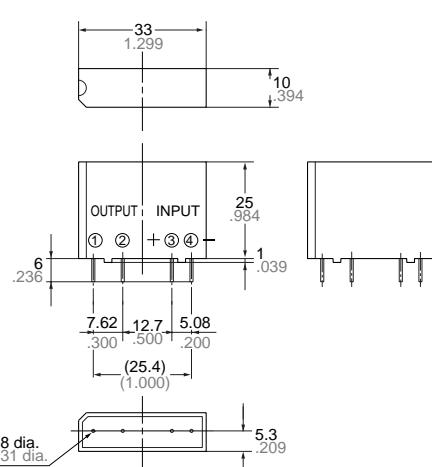


General tolerance: $\pm 0.5 \pm 0.020$

Mounting hole location
(Copper-side view)

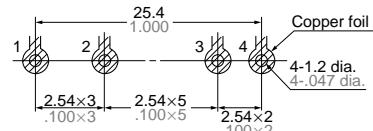

Schematic




Tolerance: $\pm 0.1 \pm 0.004$

Discontinued: AC optically coupled isolation type
Last time buy: August 31, 2011


AQ1

2. AC output, 2A and 3A types (Flat)


CAD Data

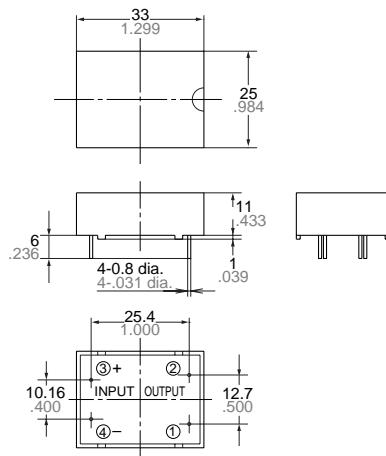

Mounting hole location
(Copper-side view)

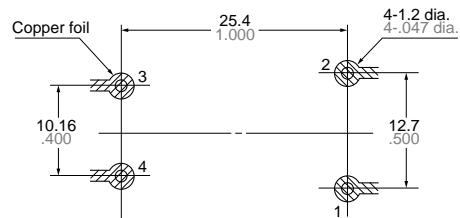



Schematic

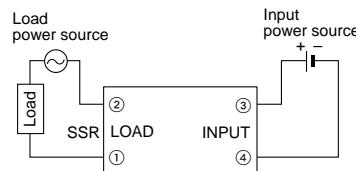


Tolerance: $\pm 0.1 \pm 0.004$

3. AC output, 5A and 10A types


CAD Data

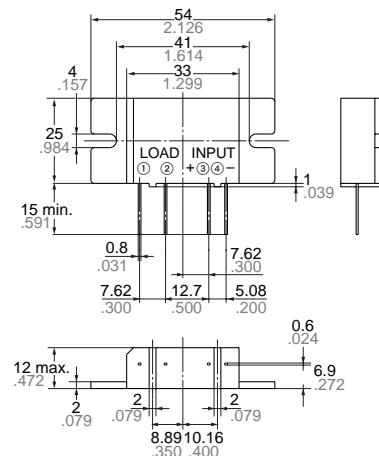

Mounting hole location (Copper-side view)

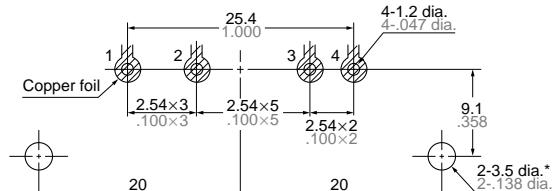



Schematic



Tolerance: $\pm 0.1 \pm 0.004$

4. Heat sink (for AQ10A2-ZT4/32VDC and AQ5A2-ZP3/28VDC)

CAD Data

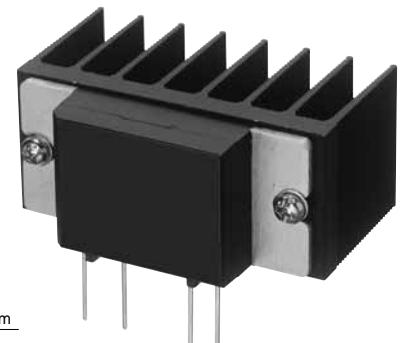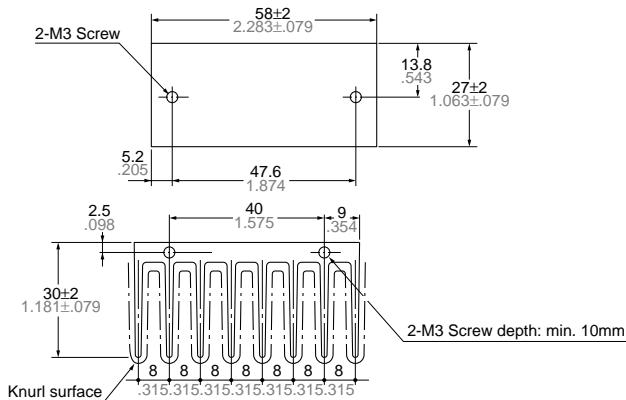


Heat sink attached to AQ1 relay

General tolerance: $\pm 0.5 \pm 0.020$

Note: When using heat sink, please refer to "Thermal Design"


5. DC output, 1A and 2A types

CAD Data

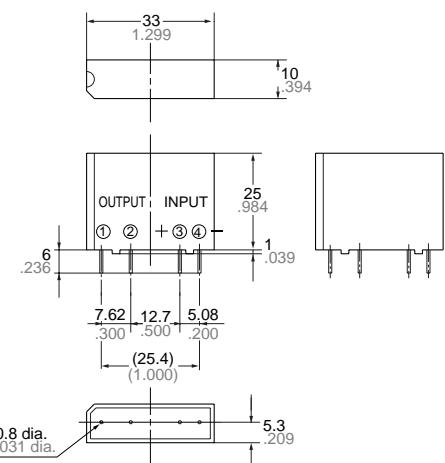


General tolerance: $\pm 0.5 \pm .020$

Mounting hole location
(Copper-side view)

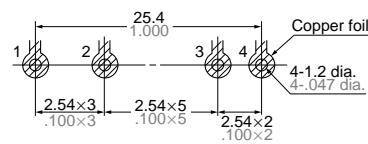

Schematic




Tolerance: $\pm 0.1 \pm .004$

NOTE

1. When using bent output terminals


To avoid applying mechanical stress on the main unit and molded section of the solid state relay, radio pliers should be used to grasp the terminals between the point of bending and the molded case when making the bends.

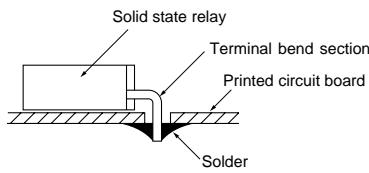

2. When a heat sink is mounted on the 5 A or 10 A type

The heat sink (AQ-HS-5A) or a radiator which can make good contact should be used.

If a heat sink is used in which the contact condition is bad, a heat conducting compound should be used to improve the heat radiation. (Ex. Silicon compound Toshiba silicon YG6111 or TSK5303) The compound should be applied between the heat sink and the AQ1.

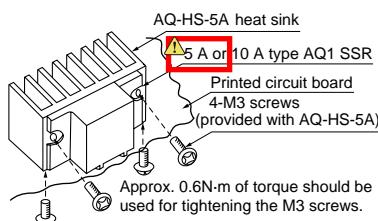

Recommended Temperature Controllers



<KT4H Temperature Controller>

Our temperature controller is recommended for use with our Solid State Relays.

Features

- Data can be collected using the RS485 communications interface via a PLC.
- Improved visibility using a negative type LCD and backlight.
- Depth-wise length (chassis dimension) is 56 mm 2.205 inch.

Substitute part numbers

Power supply	Control output	Part No.
100 to 240 V AC	Relay contact	AKT4H111100

*For detailed product information about temperature controllers, please refer to our website:
http://panasonic-denko.co.jp/ac/e/fasys/component/temperature_controller/

For Cautions for Use.