



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

16 AWG (.051) [1.29]
 SILVER PLATED,
 COPPER

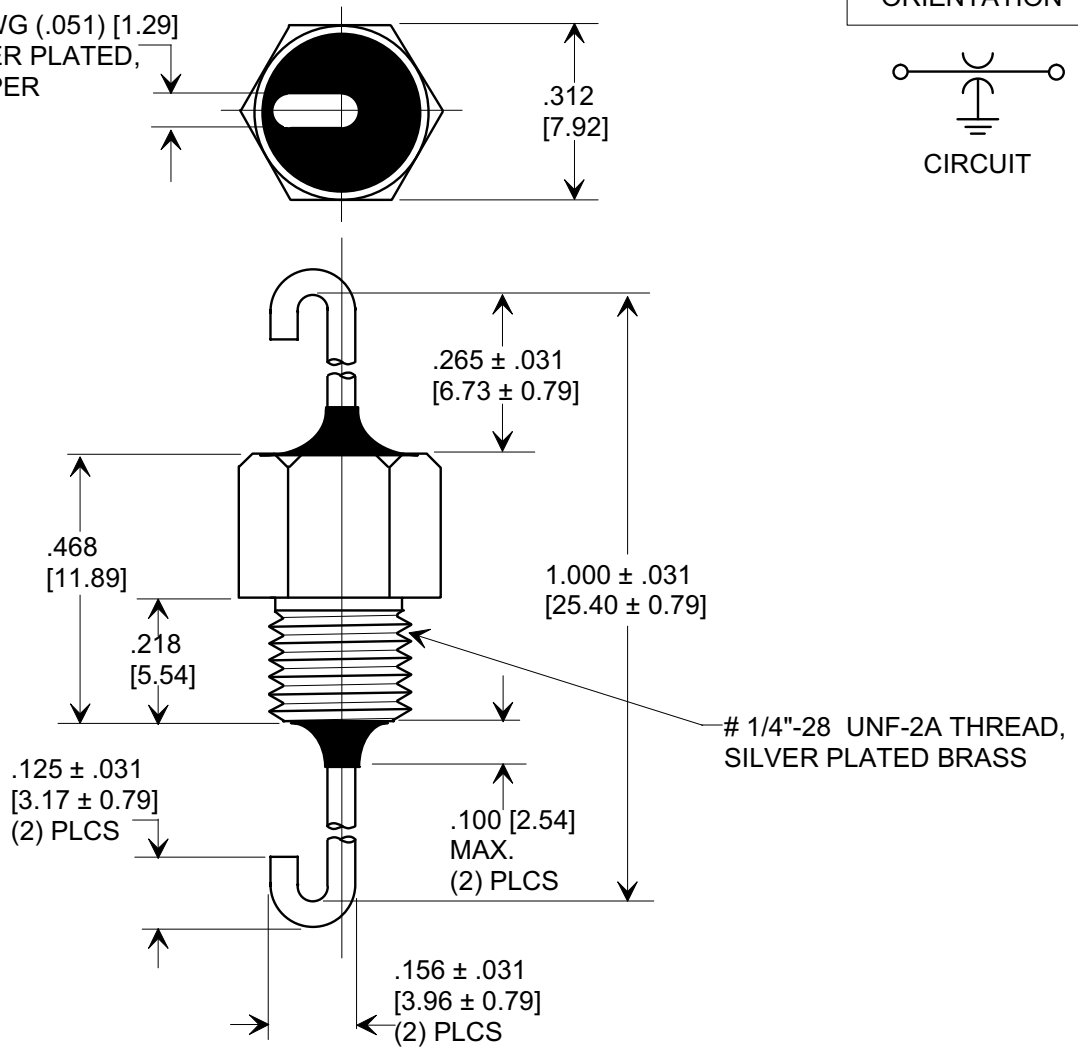

SPECIFICATIONS

Style No:	2443-007
Value:	1000 pF
Value Tol.:	±20%
Temp. Coef.:	X5S
Rating:	500 WVDC @ 85°C
Operating Range:	-55°C TO +85°C
To Tusonix Spec Unless Stated Otherwise	

NOTES:

- TUSONIX STANDARD PART NUMBER: 2443-007-X5S0-102M. TUSONIX RoHS COMPLIANT PART NUMBER: 2443-007-X5S0-102M LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: TRADEMARK, CAPACITANCE AND TOLERANCE CODE: STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER, BULK PACKAGED.

REVISION RECORD Original Release C.O. ECO-659	A	--TOLERANCES-- Unless Otherwise Specified	Title BUSHING STYLE FEED-THRU CAPACITOR	
			DECIMAL ± .015 [0.38]	Drawn L.E. 04-14-09
		ANGLES ±	Approved R.L. 04-14-09	
		TUSONIX TUCSON, ARIZONA	A 2443-007-X5S0-102M	