

ESD Suppressor

Type: **EZAEG** EZAEG2A, 3A




Features

- ESD protection of high-speed data lines
- Low capacitance 0.04 pF: 0603(0201) size 0.05 pF: 1005(0402) size
- Good ESD suppression characteristics
- Good ESD withstanding
- RoHS compliant


Recommended Applications

- Smart phones, Mobile phones, RF Modules, NFC and GPS
- ESD suppresion of high-speed differential data line such as Antena circuit, HDMI, SATA, USB, Display Port


Explanation of Part Numbers

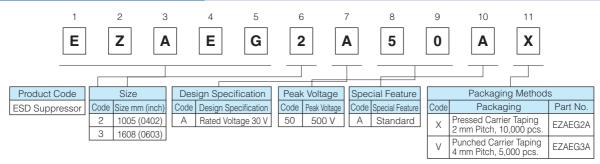


Construction

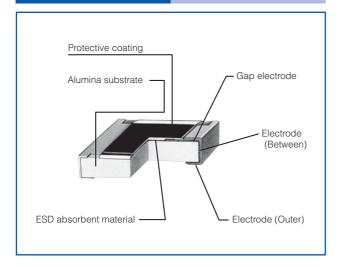

Dimensions in mm (not to scale)

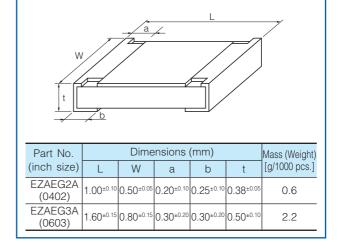

Circuit Configuration

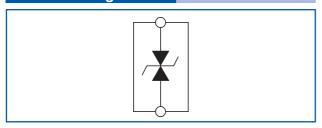




Ratings


Part Number (inch size)	Capacitance ⁽¹⁾	Peak Voltage ⁽²⁾	Clamping Voltage ⁽³⁾	Rated Voltage	Category Temperature Range
EZAEG2A50AX (0402)	0.05 ^{+0.05} _{-0.04} pF	500 V max. (350 V typ.)	100 V max.	30 V max	−55 to +125 °C
EZAEG3A50AV (0603)	0.10 ^{+0.10} _{-0.08} pF				

- (1) Capacitance = The capacitance value shall be measured under the conditions specified below. Frequency: 1 MHz±10 %, Voltage: 1 Vrms±0.2 Vrms, Temperature: 25 °C±2 °C
- (2) Peak Voltage = The peak voltage value shall be measured under the following conditions. ESD test conditions: IEC61000-4-2, 8 kV contact discharge
- (3) Clamping Voltage = The clamping voltage value shall be measured at 30 ns after initiation of pulse and measured under the conditions specified below. ESD test conditions: IEC61000-4-2, 8 kV contact discharge

Frequency Characteristics

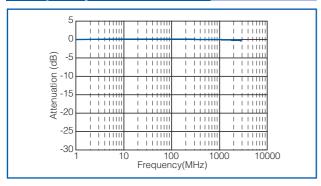


ESD Suppression Voltage Waveform

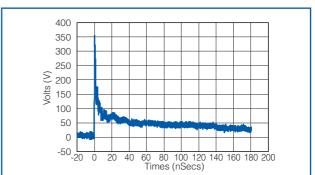


Typical Circuits Requiring Protection

HDMI circuit

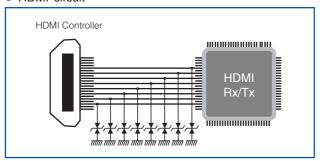


Antenna circuit

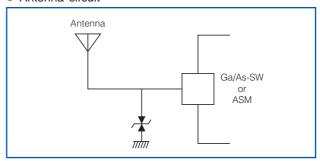

Recommended Land Pattern

Recommended land pattern design for ESD Suppressor is shown below.

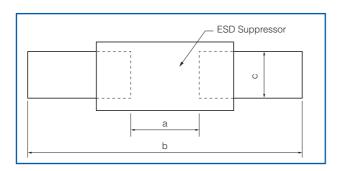

Part Number	Dimensions (mm)			
(inch size)	а	b	С	
EZAEG2A (0402)	0.5 to 0.6	1.4 to 1.6	0.4 to 0.6	
EZAEG3A (0603)	0.7 to 0.9	2.0 to 2.2	0.8 to 1.0	

■ As for Packaging Methods, Soldering Conditions and Safety Precautions,

Please see Data Files