

#### **DATA SHEET**

# SMPA1304-011LF: Low Distortion Attenuator Plastic Packaged PIN Diode

## **Automotive Applications**

- Infotainment
- Navigation
- Telematics
- · Garage door openers
- · Wireless control systems

#### **Features**

- AEC-Q101 qualified
- ISO/TS16949 certified facility
- Designed for low distortion attenuator applications
- Frequency range from 5 MHz to >2 GHz
- Package rated MSL1 @ 260 °C per JEDEC J-STD-020



Skyworks Green<sup>TM</sup> products are compliant with all applicable legislation and are halogen-free. For additional information, refer to *Skyworks Definition of Green*<sup>TM</sup>, document number SQ04-0074.



### **Description**


The SMPA1304-011LF plastic packaged, surface mountable, low capacitance (0.3 pF) silicon PIN diode is designed for attenuator applications from 5 MHz to beyond 2 GHz.

The thick  $100 \mu m$  I region of this PIN diode makes this device very attractive for use in low distortion attenuators in vehicle infotainment applications.

The 1  $\mu s$  typical carrier lifetime of this diode results in a resistance of 20  $\Omega$  maximum at 1 mA and 7  $\Omega$  maximum at 10 mA.

Table 1 describes the SMPA1304-011LF package and marking.

**Table 1. Package and Marking** 





The Pb-free symbol or "LF" in the part number denotes a lead-free, RoHS-compliant package unless otherwise noted as Green™. Tin/lead (Sn/Pb) packaging is not recommended for new designs.

## **Electrical and Mechanical Specifications**

The absolute maximum ratings of the SMPA1304-011LF are provided in Table 2. Electrical specifications are provided in Table 3. Resistance versus temperature measurements are provided in Table 4.

Typical performance characteristics of the SMPA1304-011LF are illustrated in Figures 1 to 4. Package dimensions are shown in Figure 5, and tape and reel dimensions are provided in Figure 6.

### **Package and Handling Information**

Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SMPA1304-011LF is rated to Moisture Sensitivity Level 1 (MSL1) at 260 °C. It can be used for lead or lead-free soldering. For additional information, refer to the Skyworks Application Note, *Solder Reflow Information*, document number 200164

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.

Table 2. SMPA1304-011LF Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Minimum	Maximum	Units
Reverse voltage	VR		200	V
Power dissipation @ 25 °C lead temperature	P <sub>D</sub>		250	mW
Storage temperature	T <sub>STG</sub>	-65	+150	°C
Operating temperature	TA	-65	+150	°C
Electrostatic discharge:	ESD			
Human Body Model (HBM), Class 1C			2000	V

Note 1: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

**CAUTION**: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

Table 3. SMPA1304-011LF Electrical Specifications (Note 1) (T $_{\rm A}$  = +25 °C, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Typical	Max	Units
Reverse Current	I <sub>R</sub>	$V_R = 200 \text{ V}$		10	μΑ
Capacitance	C <sub>T</sub>	f = 1 MHz, V = 30 V		0.3	pF
Resistance	R <sub>S</sub>	f = 100 MHz			
		I = 1 mA I = 10 mA I = 100 mA	40	50 7 2	Ω Ω Ω
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	0.8		V
Carrier lifetime	TI	I <sub>F</sub> = 10 mA	1		μs
I region width			100		μm

Note 1: Performance is guaranteed only under the conditions listed in this table.

Table 4. Resistance vs Temperature @ 100 MHz

IF (mA)	Rs @ -55 °C (Ω)	Rs @ -15 °C (Ω)	Rs @ +25 °C (Ω)	Rs @ +65 °C (Ω)	R <sub>S</sub> @ +100 °C (Ω)
0.02	1590	1660	1752	`1770	1760
0.10	315	340	367	396	409
0.30	108	118	128	141	147
1.0	34.5	37.9	41.6	46.3	48.8
10	4.8	5.3	5.8	6.6	7.0
20	3.0	3.3	3.6	4.1	4.3
100	1.3	1.4	1.5	1.7	1.8

## **Typical Performance Characteristics**




Figure 1. Series Resistance vs Current @ 100 MHz




Figure 3. Capacitance vs Reverse Voltage






Figure 2. DC Characteristic




**Figure 4. Conductance vs Frequency and Reverse Voltage** 

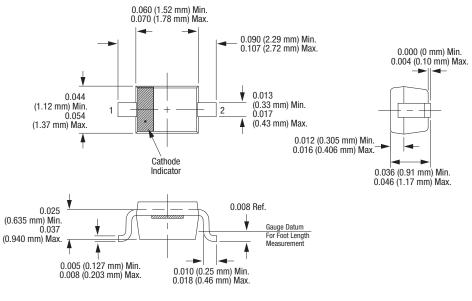

Dimensions are in inches (millimeters shown in parentheses)

S1619

Figure 5. SOD-323 Package Dimension Drawing

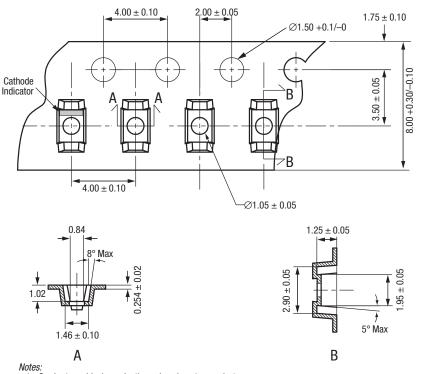

- Carrier tape: black conductive polycarbonate or polystyrene. Cover tape: transparent conductive material. Cover tape size: 5.5 mm width.

- ESD surface resistivity is  $\geq 1 \times 10^5 \sim \leq 1 \times 10^{11}$  Ohms/square. 10 sprocket hole pitch cumulative tolerance:  $\pm 0.20$  mm.
- Ao and Bo measured on plane 0.30 mm above bottom of the pocket. All measurements are in millimeters.

  Standard reel size is 7 inches. Standard reel quantity is 3000 pcs. 6. 7. 8.

S2061

**Figure 6. SOD-323 Tape and Reel Dimensions** 

#### DATA SHEET • SMPA1304-011LF: LOW-DISTORTION ATTENUATOR PLASTIC PACKAGED PIN DIODE

Copyright © 2014 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference