2.5V / 3.3V Differential 2 x 2 Crosspoint Switch with CML Outputs Clock/Data Buffer/Translator

Multi-Level Inputs w/ Internal Termination

Description

The NB7L72M is a high bandwidth, low voltage, fully differential 2 x 2 crosspoint switch with CML outputs. The NB7L72M design is optimized for low skew and minimal jitter as it produces two identical copies of Clock or Data operating up to 7 GHz or 10 Gb/s, respectively. As such, the NB7L72M is ideal for SONET, GigE, Fiber Channel, Backplane and other clock/data distribution applications.

The differential IN/ $\overline{\text{IN}}$ inputs incorporate internal 50 Ω termination resistors and will accept LVPECL, CML, or LVDS logic levels (see Figure 11). The 16 mA differential CML outputs provide matching internal 50 Ω terminations and produce 400 mV output swings when externally terminated with a 50 Ω resistor to V_{CC} (see Figure 9).

The NB7L72M is the 2.5 V/3.3 V version of the and NB7V72M and is offered in a low profile 3x3 mm 16-pin QFN package. Application notes, models, and support documentation are available at www.onsemi.com.

The NB7L72M is a member of the GigaComm $^{\text{\tiny TM}}$ family of high performance clock products.

Features

- Maximum Input Data Rate > 10 Gb/s
- Data Dependent Jitter < 10 ps pk-pk
- Maximum Input Clock Frequency > 7 GHz
- Random Clock Jitter < 0.5 ps RMS, Max
- 150 ps Typical Propagation Delay
- 30 ps Typical Rise and Fall Times
- Differential CML Outputs, 400 mV peak-to-peak, typical
- Operating Range: $V_{CC} = 2.375 \text{ V}$ to 3.6 V with GND = 0 V
- Internal 50 Ω Input Termination Resistors
- QFN-16 Package, 3mm x 3mm
- -40°C to +85°C Ambient Operating Temperature
- These are Pb-Free Devices



ON Semiconductor®

http://onsemi.com

MARKING DIAGRAM*



QFN-16 MN SUFFIX CASE 485G



= Assembly Location


_ = Wafer Lot Y = Year

W = Year W = Work Week

= Pb-Free Package

(Note: Microdot may be in either location)

*For additional marking information, refer to Application Note AND8002/D.

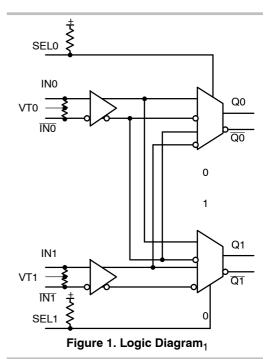

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.




Table 1. INPUT/OUTPUT SELECT TRUTH TABLE

SEL0*	SEL1*	Q0	Q1
L	L	IN0	IN0
L	Н	IN0	IN1
Н	L	IN1	IN0
Н	Н	IN1	IN1

^{*}Defaults HIGH when left open

Figure 2. Pin Configuration (Top View)

Table 2. PIN DESCRIPTION

Pin	Name	I/O	Description
1	IN0	LVPECL, CML, LVDS Input	Noninverted Differential Input. (Note 1)
2	ĪN0	LVPECL, CML, LVDS Input	Inverted Differential Input. (Note 1)
3	ĪN1	LVPECL, CML, LVDS Input	Inverted Differential Input. (Note 1)
4	IN1	LVPECL, CML, LVDS Input	Noninverted Differential Input. (Note 1)
5	VT1	_	Internal 50 Ω Termination Pin for IN1 and $\overline{\text{IN1}}$.
6	SEL1	LVCMOS Input	Input Select logic pin for IN0 or IN1 Inputs to Q1 output. See Table 1, Input/Output Select Truth Table; pin defaults HIGH when left open.
7	GND		Negative Supply Voltage
8	VCC	-	Positive Supply Voltage
9	Q1	CML Output	Noninverted Differential Output. (Note 1)
10	Q1	CML Output	Inverted Differential Output. (Note 1)
11	Q0	CML Output	Inverted Differential Output. (Note 1)
12	Q0	CML Output	Noninverted Differential Output. (Note 1)
13	VCC	_	Positive Supply Voltage
14	GND	_	Negative Supply Voltage
15	SEL0	LVCMOS Input	Input Select logic pin for IN0 or IN1 Inputs to Q0 output. See Table 1, Input/Output Select Truth Table; pin defaults HIGH when left open.
16	VT0	-	Internal 50 Ω Termination Pin for IN0 and $\overline{\text{IN0}}$
-	EP	-	The Exposed Pad (EP) on the QFN-16 package bottom is thermally connected to the die for improved heat transfer out of package. The exposed pad must be attached to a heat-sinking conduit. The pad is electrically connected to the die, and is recommended to be electrically and thermally connected to GND on the PC board.

In the differential configuration when the input termination pins (VT0, VT1) are connected to a common termination voltage or left open, and if no signal is applied on INx/INx input, then the device will be susceptible to self–oscillation.

2. All VCC and GND pins must be externally connected to a power supply for proper operation.

Table 3. ATTRIBUTES

Characterist	Value			
ESD Protection	D Protection Human Body Model Machine Model			
R _{PU} – Input Pullup Resistor	75 kΩ			
Moisture Sensitivity (Note 3)	QFN-16	Level 1		
Flammability Rating	UL 94 V-0 @ 0.125 in			
Transistor Count	212			
Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test				

^{3.} For additional information, see Application Note AND8003/D.

Table 4. MAXIMUM RATINGS

Symbol	Parameter	Condition 1	Condition 2	Rating	Unit
V _{CC}	Positive Power Supply	GND = 0 V		4.0	V
V _{IN}	Positive Input Voltage	GND = 0 V		-0.5 to V _{CC} +0.5	V
V _{INPP}	Differential Input Voltage IN − IN			1.89	V
I _{IN}	Input Current Through R _T (50 Ω Resistor)			±40	mA
I _{OUT}	Output Current Through R _T (50 Ω Resistor)			±40	mA
T _A	Operating Temperature Range			-40 to +85	°C
T _{stg}	Storage Temperature Range			-65 to +150	°C
θ_{JA}	Thermal Resistance (Junction-to-Ambient) (Note 4)	0 lfpm 500 lfpm	QFN-16 QFN-16	42 35	°C/W °C/W
$\theta_{\sf JC}$	Thermal Resistance (Junction-to-Case) (Note 4)		QFN-16	4	°C/W
T _{sol}	Wave Solder Pb-Free			265	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

4. JEDEC standard multilayer board – 2S2P (2 signal, 2 power) with 8 filled thermal vias under exposed pad.

 $\textbf{Table 5. DC CHARACTERISTICS, Multi-Level Inputs} \ V_{CC} = 2.375 \ V \ to \ 3.6 \ V, \ GND = 0 \ V, \ T_A = -40 ^{\circ}C \ to \ +85 ^{\circ}C \ (Note \ 5) \ A = -$

Symbol	Characteristic	Min	Тур	Max	Unit
POWER	SUPPLY CURRENT			•	
V _{CC}	Power Supply Voltage $V_{CC} = 2.5 \text{ V} $ $V_{CC} = 3.3 \text{ V}$	2.375 3.0	2.5 3.3	2.625 3.6	V
I _{CC}	Power Supply Current (Inputs and Outputs Open)	80	135	175	mA
CML OU	тритѕ		1		
V _{OH}	Output HIGH Voltage (Note 6)	V _{CC} - 40 3260 2460	V _{CC} – 20 3280 2480	V _{CC} 3300 2500	mV
V _{OL}	Output LOW Voltage (Note 6)	V _{CC} - 650 2650 V _{CC} - 600 1900	V _{CC} - 500 2800 V _{CC} - 500 2000	V _{CC} - 400 2900 V _{CC} - 350 2150	mV
DIFFERE	NTIAL CLOCK INPUTS DRIVEN SINGLE-ENDED (Note 7) (Figure	s 5 and 7)			
V_{th}	Input Threshold Reference Voltage Range (Note 8)	1050		V _{CC} - 100	mV
V_{IH}	Single-Ended Input HIGH Voltage	V _{th} + 100		V _{CC}	mV
V_{IL}	Single-Ended Input LOW Voltage	GND		V _{th} – 100	mV
V_{ISE}	Single-Ended Input Voltage (V _{IH} - V _{IL})	200		2800	mV
DIFFERE	NTIAL DATA/CLOCK INPUTS DRIVEN DIFFERENTIALLY (Figures	6 and 8) (Note	9)		
V_{IHD}	Differential Input HIGH Voltage (INn, INn)	1100		V _{CC}	mV
V_{ILD}	Differential Input LOW Voltage (INn, INn)	GND		V _{CC} - 100	mV
V_{ID}	Differential Input Voltage (INn, INn) (V _{IHD} - V _{ILD})	100		1200	mV
V_{CMR}	Input Common Mode Range (Differential Configuration, Note 10) (Figure 9)	950		V _{CC} – 50	mV
I _{IH}	Input HIGH Current INn, INn (VTIN/VTIN Open)	-150		150	μΑ
I _{IL}	Input LOW Current INn, INn (VTIN/VTIN Open)	-150		150	μΑ
CONTRO	DL INPUTS (SEL0, SEL1)				
V _{IH}	Input HIGH Voltage for Control Pins	2.0		V _{CC}	mV
V_{IL}	Input LOW Voltage for Control Pins	GND		0.8	mV
I _{IH}	Input HIGH Current	-150		150	μΑ
I _{IL}	Input LOW Current	-150		150	μΑ
TERMINA	ATION RESISTORS				
R _{TIN}	Internal Input Termination Resistor	40	50	60	Ω
R _{TOUT}	Internal Output Termination Resistor	40	50	60	Ω

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

- 5. Input and output parameters vary 1:1 with V $_{CC}$.
 6. CML outputs loaded with 50 Ω to V $_{CC}$ for proper operation.
- V_{th}, V_{IH}, V_{IL}, and V_{ISE} parameters must be complied with simultaneously.
 V_{th} is applied to the complementary input when operating in single-ended mode.
- 9. V_{IHD}, V_{ILD}, V_{ID} and V_{CMR} parameters must be complied with simultaneously.

 10. V_{CMR} min varies 1:1 with GND, V_{CMR} max varies 1:1 with V_{CC}. The V_{CMR} range is referenced to the most positive side of the differential input signal.

Table 6. AC CHARACTERISTICS V_{CC} = 2.375 V to 3.6 V; GND = 0 V; T_A = -40°C to 85°C (Note 11)

Symbol	Characteristic		Min	Тур	Max	Unit
f _{MAX}	Maximum Input Clock Frequency Vou	r ≥ 250 mV r ≥ 200 mV	7.0 8.5			GHz
f _{DATAMAX}	Maximum Operating Data Rate (PRBS23)		10			Gbps
V _{OUTPP}	Output Voltage Amplitude (@ V _{INPPmin}) f _i (See Figures 3 and 10, Note 12)	n ≤ 8.5 GHz	200	400		mV
t _{PLH} , t _{PHL}	Propagation Delay to Differential Outputs, @ 1GHz, Measured at Differential Cross-point	INn/INn to Qn/Qn SELn to Qn/Qn	110	150	180	ps
t _{PLH} TC	Propagation Delay Temperature Coefficient			50		∆fs/°C
t _{SKEW}	Output-to-Output Skew (within device) (Note 13) Device-to-Device Skew (t _{pdmax} - t _{pdmin})				10 20	ps
t _{DC}	Output Clock Duty Cycle (Reference Duty Cycle = 50%) fit	າ ≤ 8.5GHz	45	50	55	%
t _{jitter}	RJ – Output Random Jitter (Note 14) fin DJ – Deterministic Jitter (Note 15)	≤ 8.5 GHz ≤ 10 Gbps		0.2	0.5 10	ps RMS ps pk-pk
V _{INPP}	Input Voltage Swing (Differential Configuration) (Note 16)		100		1200	mV
t _{r,} , t _f	Output Rise/Fall Times @ 1 GHz (20% - 80%),	Q, Q	25	30	50	ps

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

- 11. Measured using a 400 mV source, 50% duty cycle clock source. All output loading with external 50 Ω to V_{CC}. Input edge rates ≥ 40 ps (20% 80%).
- 12. Output voltage swing is a single-ended measurement operating in differential mode.
- 13. Skew is measured between outputs under identical transitions and conditions. Duty cycle skew is defined only for differential operation when the delays are measured from cross-point of the inputs to the cross-point of the outputs.
- 14. Additive RMS jitter with 50% duty cycle clock signal.
- 15. Additive Peak-to-Peak data dependent jitter with input NRZ data at PRBS23.
- 16. Input voltage swing is a single-ended measurement operating in differential mode.

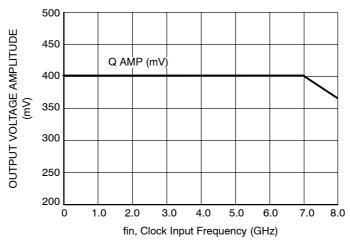


Figure 3. CLOCK Output Voltage Amplitude (V_{OUTPP}) vs. Input Frequency (f_{in}) at Ambient Temperature (Typ)




Figure 4. Input Structure




Figure 5. Differential Input Driven Single-Ended




Figure 6. Differential Inputs Driven Differentially




Figure 7. V_{th} Diagram




Figure 8. Differential Inputs Driven Differentially




Figure 9. V_{CMR} Diagram




Figure 10. AC Reference Measurement




Figure 11. Typical CML Output Structure and Termination

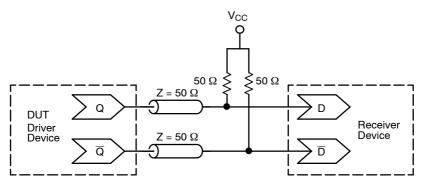


Figure 12. Typical Termination for CML Output Driver and Device Evaluation

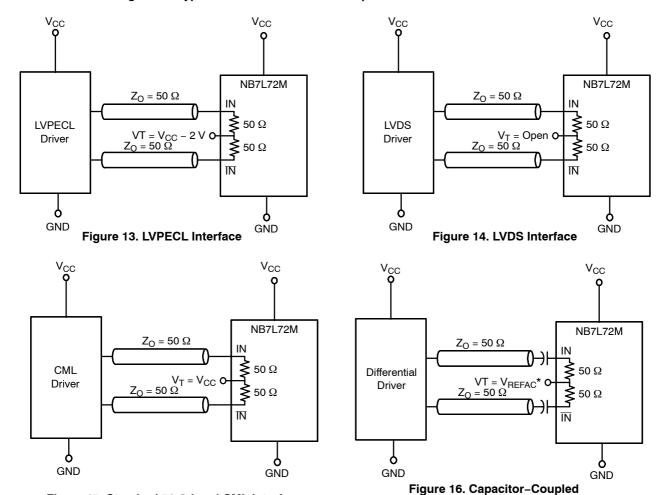


Figure 15. Standard 50 Ω Load CML Interface

Differential Interface
(VT Connected to External V_{REFAC})


* $V_{\mbox{\scriptsize REFAC}}$ bypassed to ground with a 0.01 $\mu\mbox{\scriptsize F}$ capacitor

ORDERING INFORMATION

Device	Package	Shipping [†]
NB7L72MMNG	QFN-16 (Pb-free)	123 Units / Rail
NB7L72MMNTXG	QFN-16 (Pb-free)	3000 / Tape & Reel
NB7L72MMNHTBG	QFN-16 (Pb-free)	100 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

PACKAGE DIMENSIONS

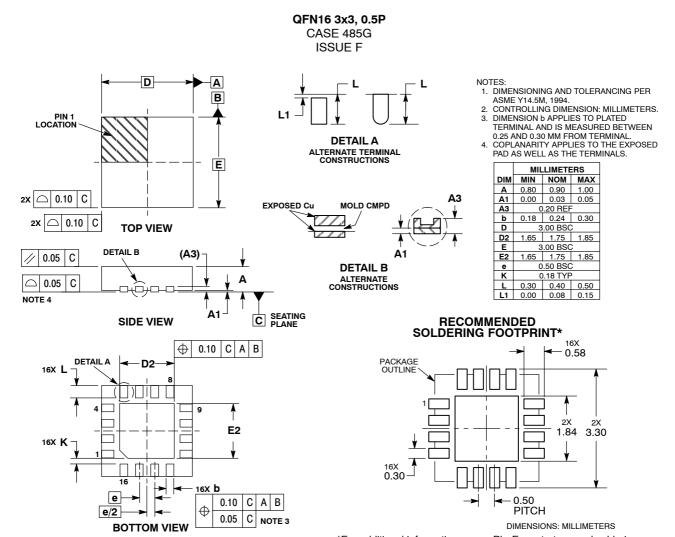

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GigaComm is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunit

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA **Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada

Fax: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative