Ohmite's TCH35 TO220 package resistor provides 35W of steady state power when properly used in today's well defined heat sink applications.

These very low induction resistors are built under proprietary processes that deliver more power handling capability than other TO220 package resistors of similar size.

Standard terminal forms are provided for manual or automatic insertion.

A single screw mounting tab connects to the heat sink and should be accompanied by the use of a thermal compound. The TCH35 Series offers a low thermal resistance to the heat sink of <4.28°C/W.

#### FEATURES

- 35W Power Rating @ 25°C
- Very Low Inductance Design
- Single Screw Mounting
- Low Thermal Resistance to Heat Sink @ RTH<4.28°C/W</li>
- Resistance Element is Electrically Insulated from Metal Heat Sink Mounting Tab

### <u>APPLICATIONS</u>

- Switching Power Supplies
- Snubbers
- High Frequency
- Voltage Regulation
- Low Energy Pulse Loading

#### SPECIFICATIONS

#### Electrical

Resistance Range:  $0.1\Omega$  to  $10K\Omega$  (higher values on request subject to derating)

#### **Resistance Tolerance:**

- ± 5% standard
- ± 1% available on request

#### **Temperature Coefficient:**

Referenced to 25°C,  $\Delta$ R taken at +105°C 10 $\Omega$  and above: ±50 ppm°C For under 10 $\Omega$ :

0R6 - 9R9 ...... 100PPM 0R4 - 0R59 ..... 150PPM 0R2 - 0R39 ..... 250PPM 0R1 - 0R19 ..... 500PPM

0R05 - 0R09...1000PPM

Max. Operating Voltage: 350V Dielectric Strength: 1800~VAC Insulation Resistance:  $10G\Omega$ 

Momentary Overload: 2x rated power for 5 seconds as long as the applied voltage  $\leq$ 1.5 times the continuous operating voltage, where  $\Delta$ R  $\pm$ (0.3% + 0.01 $\Omega$ ) max


Terminal Material: Copper Terminal Plating: Lead Free Solder (97% Tin, 3% Silver) Maximum Torque: 0.9 Nm

Power Rating: 35 Watts @ 25°C case temperature; see derating curve, below

Working Temperature Range: -55°C to +175°C

Solder Process: The TCH35 cannot exceed 260°C for more than 10 seconds during soldering process.

#### **DERATING CURVE**

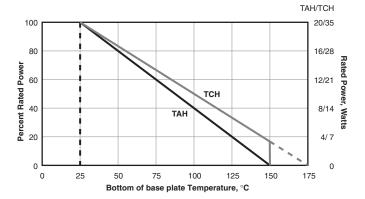


## THIS PRODUCT IS DESIGNED FOR USE WITH PROPER HEATSINKING.

Maximum base plate temperature of the resistor must be monitored and kept within specified limits to establish the power rating. Best technique is to attach a thermocouple to the side of the base plate of the resistor. Temperature of plastic housing or heat sink cannot be used to establish rating of the resistor.



### TCH Series

# 35 Watt TO220 Package Thick Film Power

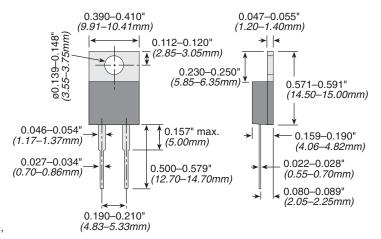

TEST DATA						
Load Life	MIL-R-39009, 2000 Hours @ Rated Pwr	$\Delta R = \pm (1.0\% + 0.01) \Omega$				
Thermal Shock	MIL-R-STD-202, Method 107, Cond. F	$\Delta R = \pm (0.3\% + 0.01) \Omega \text{ max}$				
High Freq Vibration	MIL-R-STD-202, Method 204, Cond. D	$\Delta R = \pm (0.2\% + 0.01) \Omega \text{ max}$				
Terminal Strength	MIL-R-STD-202, Method 211, Cond. A (Pull Test) 2.4N	$\Delta R = \pm (0.2\% + 0.01) \Omega \text{ max}$				
Moisture Resistance	MIL-R-STD-202, Method 106	$\Delta R = \pm (0.5\% + 0.01) \Omega \text{ max}$				



TCH35P100RJE         TCH35P220RJE         TCH35P33R0JE         TCH35P510RJE         TCH35PR20JE           TCH35P10K0JE         TCH35P22R0JE         TCH35P39R0JE         TCH35P51R0JE         TCH35PR220JE           TCH35P10R0JE         TCH35P24R0JE         TCH35P39R0JE         TCH35P5K10JE         TCH35PR240JE           TCH35P15R0JE         TCH35P2K0JE         TCH35P3K30JE         TCH35P5R10JE         TCH35PR30JE           TCH35P15R0JE         TCH35P2K0JE         TCH35P3K90JE         TCH35P75R60JE         TCH35PR470JE           TCH35P1K0JE         TCH35P2K40JE         TCH35P3R90JE         TCH35P75R0JE         TCH35PR750JE           TCH35P1R00JE         TCH35P2R00JE         TCH35P3R90JE         TCH35P7K90JE         TCH35PR50JE           TCH35P1R50JE         TCH35P2R40JE         TCH35P4R70JE         TCH35P7K90JE         TCH35PR750JE           TCH35P20R0JE         TCH35P2R40JE         TCH35P4R70JE         TCH35P7R50JE         TCH35PR750JE           TCH35P20R0JE         TCH35P2R40JE         TCH35P4R70JE         TCH35PR10JE         TCH35PR750JE           TCH35P20R0JE         TCH35P330RJE         TCH35P4R70JE         TCH35PR10JE         TCH35PR750JE           TCH35P20R0JE         TCH35P2R40JE         TCH35P4R70JE         TCH35PR150JE         TCH35PR750JE	STANDARD PART NUMBERS					
TCH35P10ROJE         TCH35P240RJE         TCH35P39R0JE         TCH35P5K10JE         TCH35PR240JE           TCH35P150RJE         TCH35P24R0JE         TCH35P3K30JE         TCH35P5R10JE         TCH35PR30JE           TCH35P15R0JE         TCH35P2K00JE         TCH35P3K90JE         TCH35P5R60JE         TCH35PR30JE           TCH35P1K50JE         TCH35P2K40JE         TCH35P3R30JE         TCH35P7S0AJE         TCH35P7K70JE           TCH35P1R00JE         TCH35P2K90JE         TCH35P3R90JE         TCH35P7K90JE         TCH35PR50JE           TCH35P1R50JE         TCH35P2R20JE         TCH35P47R0JE         TCH35P7R50JE         TCH35P7R50JE           TCH35P200RJE         TCH35P2R40JE         TCH35P4R70JE         TCH35PR100JE         TCH35PR750JE           TCH35P200RJE         TCH35P2R40JE         TCH35P4K70JE         TCH35PR100JE         TCH35PR5050JE	TCH35P100RJE	TCH35P220RJE	TCH35P33R0JE	TCH35P510RJE	TCH35PR200JE	
TCH35P150RJE         TCH35P24R0JE         TCH35P3K30JE         TCH35P5R10JE         TCH35PR30JE           TCH35P15R0JE         TCH35P2K00JE         TCH35P3K90JE         TCH35P5R60JE         TCH35PR390JE           TCH35P1K00JE         TCH35P2K20JE         TCH35P3R30JE         TCH35P75R0JE         TCH35PA470JE           TCH35P1R00JE         TCH35P2R00JE         TCH35P3F3R90JE         TCH35P75R0JE         TCH35PR50JE           TCH35P1R00JE         TCH35P2R00JE         TCH35P47R0JE         TCH35P7K50JE         TCH35PR50JE           TCH35P20R0JE         TCH35P2R40JE         TCH35P47R0JE         TCH35PR100JE         TCH35PR50JE           TCH35P20R0JE         TCH35P2R40JE         TCH35P4K70JE         TCH35PR100JE         TCH35PR5050JE	TCH35P10K0JE	TCH35P22R0JE	TCH35P390RJE	TCH35P51R0JE	TCH35PR220JE	
TCH35P15R0JE         TCH35P2K00JE         TCH35P3K90JE         TCH35P5R60JE         TCH35PR390JE           TCH35P1K00JE         TCH35P2K20JE         TCH35P3R30JE         TCH35P750RJE         TCH35PR470JE           TCH35P1K50JE         TCH35P2K40JE         TCH35P3R90JE         TCH35P75R0JE         TCH35PR510JE           TCH35P1R00JE         TCH35P2R00JE         TCH35P47R0JE         TCH35P7K50JE         TCH35PR560JE           TCH35P1R50JE         TCH35P2R20JE         TCH35P4R0JE         TCH35P7R50JE         TCH35P2R05JE           TCH35P2R0RJE         TCH35P2R40JE         TCH35P4K70JE         TCH35PR100JE         TCH35PR050JE	TCH35P10R0JE	TCH35P240RJE	TCH35P39R0JE	TCH35P5K10JE	TCH35PR240JE	
TCH35P1K00JE TCH35P2K20JE TCH35P3R30JE TCH35P750RJE TCH35PR470JE TCH35P1K50JE TCH35P2K40JE TCH35P3R90JE TCH35P750RJE TCH35PR510JE TCH35P1R00JE TCH35P2R00JE TCH35P470RJE TCH35P7K50JE TCH35P2R0JE TCH35P47R0JE TCH35P7K50JE TCH35P2R0JE TCH35P2R0JE TCH35P2R0JE TCH35P2R0JE TCH35P2R0JE TCH35P2R050JE TCH35P2R050JE	TCH35P150RJE	TCH35P24R0JE	TCH35P3K30JE	TCH35P5R10JE	TCH35PR330JE	
TCH35P1K50JE TCH35P2K40JE TCH35P3R90JE TCH35P75R0JE TCH35PR510JE TCH35P1R00JE TCH35P2R00JE TCH35P47R0JE TCH35P7K50JE TCH35P2R00JE TCH35P47R0JE TCH35P7K50JE TCH35P2R0JE TCH35P2R0JE TCH35P2R00JE TCH35P2R0JE TCH35P2R00JE TCH35P2R050JE	TCH35P15R0JE	TCH35P2K00JE	TCH35P3K90JE	TCH35P5R60JE	TCH35PR390JE	
TCH35P1R00JE TCH35P2R00JE TCH35P470RJE TCH35P7K50JE TCH35PR560JE TCH35P1R50JE TCH35P2R20JE TCH35P47R0JE TCH35P7R50JE TCH35P200RJE TCH35P2R40JE TCH35P4K70JE TCH35PR100JE TCH35PR050JE	TCH35P1K00JE	TCH35P2K20JE	TCH35P3R30JE	TCH35P750RJE	TCH35PR470JE	
TCH35P1R50JE TCH35P2R20JE TCH35P47R0JE TCH35P7R50JE TCH35P200RJE TCH35P2R40JE TCH35P4K70JE TCH35PR100JE TCH35PR050JE	TCH35P1K50JE	TCH35P2K40JE	TCH35P3R90JE	TCH35P75R0JE	TCH35PR510JE	
TCH35P200RJE TCH35P2R40JE TCH35P4K70JE TCH35PR100JE TCH35PR050JE	TCH35P1R00JE	TCH35P2R00JE	TCH35P470RJE	TCH35P7K50JE	TCH35PR560JE	
1011001 2001102 1011002 1011001 1111002 1011001 1110002	TCH35P1R50JE	TCH35P2R20JE	TCH35P47R0JE	TCH35P7R50JE	TCH35PR750JE	
TCH35P20R0JE TCH35P330RJE TCH35P4R70JE TCH35PR150JE	TCH35P200RJE	TCH35P2R40JE	TCH35P4K70JE	TCH35PR100JE	TCH35PR050JE	
	TCH35P20R0JE	TCH35P330RJE	TCH35P4R70JE	TCH35PR150JE		