


Capacitor, aluminum, 0.033 F, +/-20% Tol, -40/+105C, 63 VDC@105C

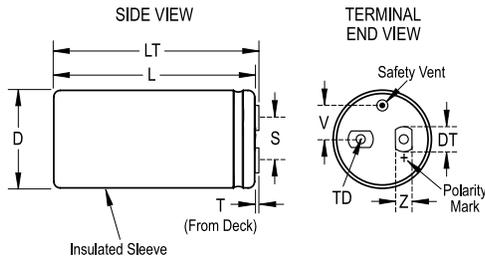

General Information	
Supplier:	KEMET
Application:	105C
Part Type Description:	Screw Terminal Aluminum Electrolytic
Style:	Screw Terminal
Lead Type:	Oval Threaded Inserts- M5
Mounting Type:	Clip- V10/UTE2738
Weight:	505 g
RoHS:	Yes

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	66	+/-1
L	105	+/-2
LT	110.5	+/-1
S	28.5	+/-0.5
T	5.5	+/-0.5
TD	10	MIN
DT	13	+/-0.5
V	15.8	NOM
Z	10	NOM

Specifications	
Capacitance:	0.033 F
Voltage:	63 VDC
Tolerance:	+/-20%
Voltage:	72.45 VDC (Surge)
Rated Temperature:	105C
Temperature Range:	-40/+105C
Life:	8000 Hrs (Rated Voltage And Ripple Current At 105C)
Life:	13000 Hrs (Rated Voltage At 105C)
Leakage Current:	6 mA
Leakage Condition:	uAmps (5min 20C)
Resistance/ESR:	8 mOhms (100Hz 20C)
Resistance/ESR:	7 mOhms (10kHz 20C)
Current/Ripple Current:	21.3 Amps (100Hz 105C)
Current/Ripple Current:	22.2 Amps (10kHz 105C)

Notes:

- Dimensions D And L Include Sleaving
- MS (MxH) = M12x16

Packaging Specifications	
Package Kind:	Bulk