
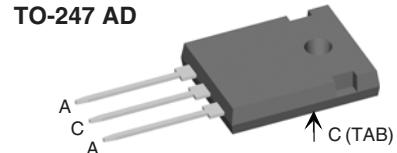


Power Schottky Rectifier with common cathode

$I_{FAV} = 2 \times 40 \text{ A}$
 $V_{RRM} = 60 \text{ V}$
 $V_F = 0.51 \text{ V}$

| V_{RSM} | V_{RRM} | Type |
|-----------|-----------|--------------|
| V | V | |
| 60 | 60 | DSSK 80-006B |



A = Anode, C = Cathode , TAB = Cathode

| Symbol | Conditions | Maximum Ratings | | |
|----------------|--|-----------------|--|------------|
| I_{FRMS} | | 70 | | A |
| I_{FAV} | $T_C = 120^\circ\text{C}$; rectangular, $d = 0.5$ | 40 | | A |
| I_{FAV} | $T_C = 120^\circ\text{C}$; rectangular, $d = 0.5$; per device | 80 | | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine | 600 | | A |
| E_{AS} | $I_{AS} = 20 \text{ A}$; $L = 100 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive | 20 | | mJ |
| I_{AR} | $V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive | 2 | | A |
| $(dv/dt)_{cr}$ | | 1000 | | V/ μ s |
| T_{VJ} | | -55...+150 | | °C |
| T_{VJM} | | 150 | | °C |
| T_{stg} | | -55...+150 | | °C |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 155 | | W |
| M_d | mounting torque | 0.8...1.2 | | Nm |
| Weight | typical | 6 | | g |

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

| Symbol | Conditions | Characteristic Values | |
|--------------------------|--|-----------------------|-------------|
| | | typ. | max. |
| I_R | ① $V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 100^\circ\text{C}$ | 20 200 | mA mA |
| V_F | $I_F = 40 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ $I_F = 40 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $I_F = 80 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ | 0.51 0.55 0.74 | V V V |
| R_{thJC} R_{thCH} | | 0.8 0.25 | K/W K/W |

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0%

Data according to IEC 60747 and per diode unless otherwise specified.

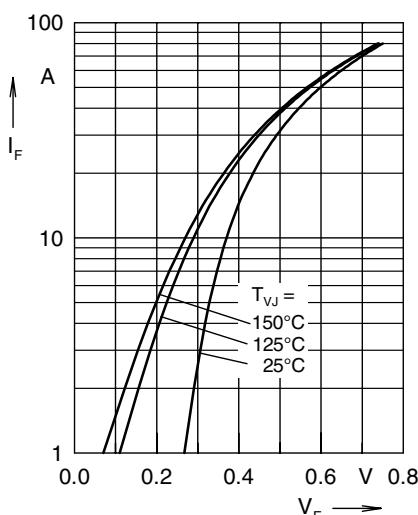


Fig. 1 Maximum forward voltage drop characteristics

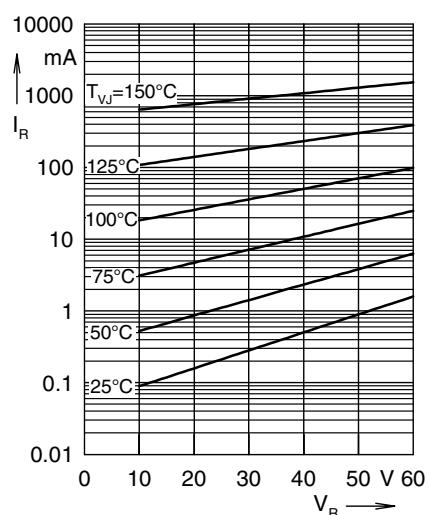


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

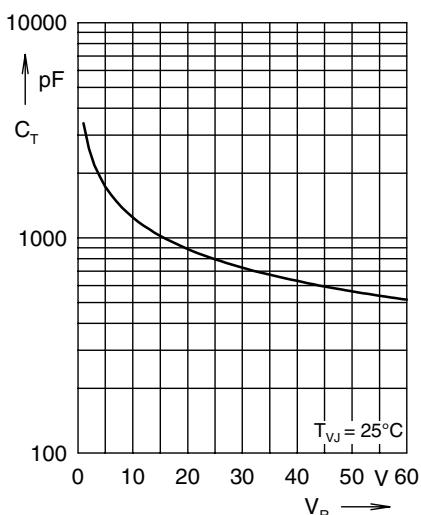


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

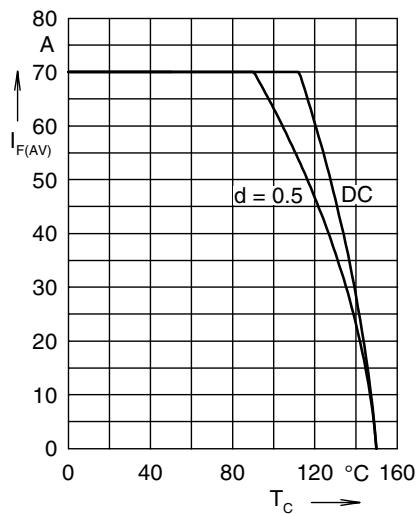


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

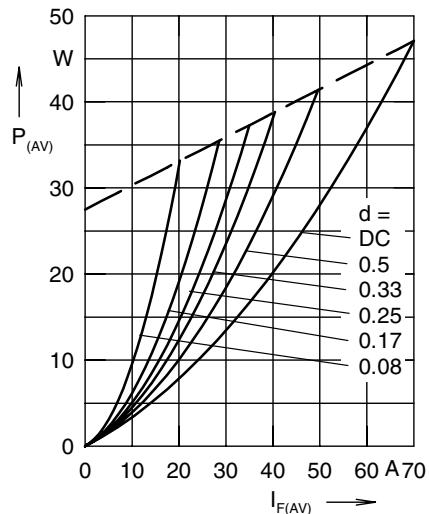


Fig. 5 Forward power loss characteristics

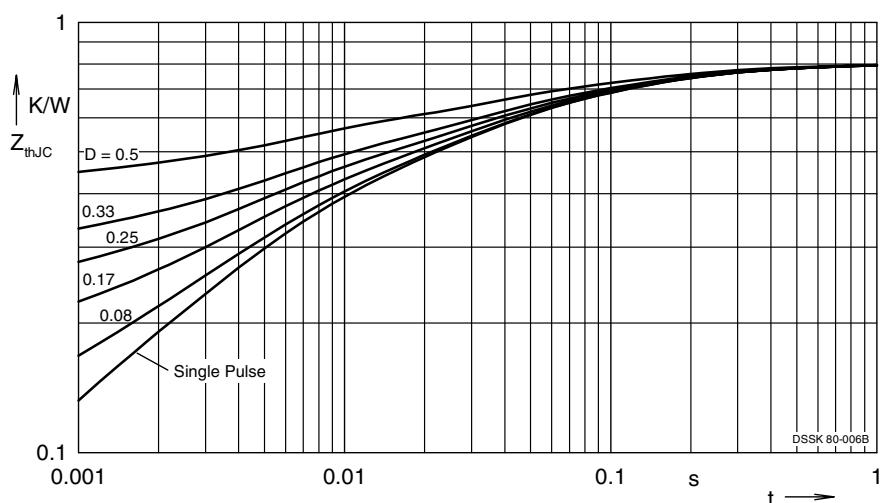


Fig. 6 Transient thermal impedance junction to case at various duty cycles

IXYS reserves the right to change limits, Conditions and dimensions.